



MET Laboratories, Inc. *Safety Certification - EMI – Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587-3201 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CA 95054-2401 • PHONE (408) 748-3585 • FAX (510) 489-6372

January 13, 2010

Ubiquiti Networks
91 E. Tasman
San Jose, CA 95134

Dear Robert Pera,

Enclosed is the EMC test report for compliance testing of the Ubiquiti Networks, M5G tested to the requirements of ETSI EN 301 893 (Article 3.2 of R&TTE Directive).

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\Ubiquiti Networks\EMCS81790-ETS893)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. .

DOC-EMC602 4/30/2004



MET Laboratories, Inc. *Safety Certification - EMI – Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587-3201 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CA 95054-2401 • PHONE (408) 748-3585 • FAX (510) 489-6372

Electromagnetic Compatibility Criteria Test Report

For the

**Ubiquiti Networks
Model M5G**

Tested under

ETSI EN 301 893
(Article 3.2 of R&TTE Directive)

MET Report: EMCS81790-ETS893

January 13, 2010

Prepared For:

**Ubiquiti Networks
91 E. Tasman
San Jose, CA 95134**

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report

For the

**Ubiquiti Networks
Model M5G**

Tested under

ETSI EN 301 893

(Article 3.2 of R&TTE Directive)

MET Report: EMCS81790-ETS893



Anderson Soungpanya, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of ETSI EN 301 893 of the EU Rules under normal use and maintenance.



Shawn McMillen,
Wireless Manager, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	January 13, 2010	Initial Issue.

Table of Contents

I.	Requirements Summary.....	1
II.	Equipment Configuration	3
	A. Overview	4
	B. References	4
	C. Test Site	5
	D. Description of Test Sample.....	5
	E. Equipment Configuration	7
	F. Support Equipment.....	7
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	8
	I. Method of Monitoring EUT Operation.....	8
	J. Modifications.....	8
	a) Modifications to EUT.....	8
	b) Modifications to Test Standard	8
	K. Disposition of EUT.....	8
III.	Conformance Requirements	9
	4.2 Centre Frequencies	10
	4.3 Nominal Channel Bandwidth and Occupied Channel Bandwidth	11
	4.4 RF Output Power, Transmit Power Control (TPC), and Power Density	14
	4.5.1 Transmitter Unwanted Emissions Outside the 5GHz RLAN Bands (Conducted).....	24
	4.5.1 Transmitter Unwanted Emissions Outside the 5GHz RLAN Bands (Radiated).....	35
	4.5.2 Transmitter Unwanted Emissions Within the 5GHz RLAN Bands (Conducted)	49
	4.5.2 Transmitter Unwanted Emissions Within the 5GHz RLAN Bands (Radiated)	55
	4.6 Receiver Spurious Emissions (Conducted).....	58
	4.6 Receiver Spurious Emissions (Radiated).....	60
	4.8 Medium Access Protocol.....	63
	4.9 User Access Restrictions	64
IV.	DFS Requirements.....	65
	Dynamic Frequency Selection (DFS)	66
	Required Radar Test Waveforms.....	70
	Radar Waveform Calibration.....	71
	Test Setup for EUT.....	73
	Channel Shutdown and Non-Occupancy Period.....	74
V.	Test Equipment.....	77

List of Tables

Table 1. Summary of EMC ETSI EN 301 893 Compliance Testing.....	2
Table 2. Test References	4
Table 3. Equipment Configuration	7
Table 4. Support Equipment.....	7
Table 5. Ports and Cabling Information	7
Table 6. Carrier Frequencies, Test Results.....	10
Table 7. Mean EIRP Limits for RF Output Power and Power Density at the Highest Power Level.....	14
Table 8. Mean EIRP Limits for RF Output Power at the Lowest Power Level of the TPC Range.....	15
Table 9. RF Output Power, Test Results, 802.11n 20MHz	17
Table 10. RF Output Power, Test Results, 802.11n 40MHz	17
Table 11. Transmit Power Control, Test Results, 802.11n 20MHz	18
Table 12. Transmit Power Control, Test Results, 802.11n 40MHz	18
Table 13. Applicability of DFS requirements	68
Table 14. Interference Threshold values, Master or Client incorporating In-Service Monitoring	69
Table 15. DFS Requirement values.....	69
Table 16. Parameters of the reference DFS test signal.....	69
Table 17. Detection Probability	69
Table 18. EN 301 893 1.5.1 Radar Test Waveforms.....	70
Table 19. DFS Equipment List.....	79

List of Figures

Figure 1. Block Diagram of Test Configuration 1.....	5
Figure 2. Block Diagram of Test Configuration 2.....	6
Figure 3. Occupied Bandwidth Test Setup.....	11
Figure 4. Output Power, TPC, and Power Density Test Setup.....	16
Figure 5. Unwanted Conducted Emissions Outside Test Setup	24
Figure 6. Unwanted Conducted Emissions Within Test Setup.....	50
Figure 7. Receiver Spurious Emissions Test Setup.....	58
Figure 8. Receiver Spurious Emissions Test Setup.....	60
Figure 9. Radar Waveform Calibration Setup.....	71
Figure 10. Test Setup for Slave Device.....	73

List of Photographs

Photograph 1. Radiated Emissions Setup, 30 MHz – 1 GHz, Bilog	47
Photograph 2. Radiated Emissions Setup, 1 GHz – 18 GHz, Horn	47
Photograph 3. Radiated Emissions Setup, 18 GHz – 26 GHz, Horn	48
Photograph 4. Radar Test Signal Generator	71

List of Plots

Plot 1. Occupied Bandwidth, 5500 MHz, 802.11n 20MHz	12
Plot 2. Occupied Bandwidth, 5700 MHz, 802.11n 20MHz	12
Plot 3. Occupied Bandwidth, 5500 MHz, 802.11n 40MHz	13
Plot 4. Occupied Bandwidth, 5700 MHz, 802.11n 40MHz	13
Plot 5. Power Spectral Density, 5500MHz, Determination, 802.11n 20MHz	19
Plot 6. Power Spectral Density, 5500MHz, 802.11n 20MHz	20
Plot 7. Power Spectral Density, 5700MHz, Determination, 802.11n 20MHz	20
Plot 8. Power Spectral Density, 5700MHz, 802.11n 20MHz	21
Plot 9. Power Spectral Density, 5500MHz, Determination, 802.11n 40MHz	21
Plot 10. Power Spectral Density, 5500MHz, 802.11n 40MHz	22
Plot 11. Power Spectral Density, 5700MHz, Determination, 802.11n 40MHz	22
Plot 12. Power Spectral Density, 5700MHz, 802.11n 40MHz	23
Plot 13. Out of Band Conducted Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 30 MHz – 1 GHz	25
Plot 14. Out of Band Conducted Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 1 GHz – 5.15 GHz	25
Plot 15. Out of Band Conducted Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 5.35 GHz – 5.47 GHz	26
Plot 16. Out of Band Conducted Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 5.725 GHz – 26 GHz	26
Plot 17. Out of Band Conducted Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 30 MHz – 1 GHz	27
Plot 18. Out of Band Conducted Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 1 GHz – 5.15 GHz	27
Plot 19. Out of Band Conducted Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 5.35 GHz – 5.47 GHz	28
Plot 20. Out of Band Conducted Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 5.725 GHz – 26 GHz	28
Plot 21. Out of Band Conducted Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, Zero Span at 5725 MHz	29
Plot 22. Out of Band Conducted Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 30 MHz – 1 GHz	30
Plot 23. Out of Band Conducted Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 1 GHz – 5.15 GHz	30
Plot 24. Out of Band Conducted Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 5.35 GHz – 5.47 GHz	31
Plot 25. Out of Band Conducted Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, Zero Span at 5470 MHz	31
Plot 26. Out of Band Conducted Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 5.725 GHz – 26 GHz	32
Plot 27. Out of Band Conducted Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 30 MHz – 1 GHz	32
Plot 28. Out of Band Conducted Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 1 GHz – 5.15 GHz	33
Plot 29. Out of Band Conducted Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 5.35 GHz – 5.47 GHz	33
Plot 30. Out of Band Conducted Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 5.725 GHz – 26 GHz	34
Plot 31. Out of Band Conducted Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, Zero Span at 5725 MHz	34
Plot 32. Out of Band Radiated Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 30 MHz – 1 GHz	37
Plot 33. Out of Band Radiated Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 1 GHz – 5.15 GHz	37
Plot 34. Out of Band Radiated Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 5.35 GHz – 5.47 GHz	38
Plot 35. Out of Band Radiated Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 5.725 GHz – 18 GHz	38
Plot 36. Out of Band Radiated Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 18 GHz – 26 GHz	39
Plot 37. Out of Band Radiated Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 30 MHz – 1 GHz	39
Plot 38. Out of Band Radiated Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 1 GHz – 5.15 GHz	40
Plot 39. Out of Band Radiated Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 5.35 GHz – 5.47 GHz	40
Plot 40. Out of Band Radiated Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 5.725 GHz – 18 GHz	41
Plot 41. Out of Band Radiated Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 18 GHz – 26 GHz	41
Plot 42. Out of Band Radiated Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 30 MHz – 1 GHz	42

Plot 43. Out of Band Radiated Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 1 GHz – 5.15 GHz.....	42
Plot 44. Out of Band Radiated Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 5.35 GHz – 5.47 GHz.....	43
Plot 45. Out of Band Radiated Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 5.725 GHz - 18 GHz.....	43
Plot 46. Out of Band Radiated Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 18 GHz – 26 GHz.....	44
Plot 47. Out of Band Radiated Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 30 MHz – 1 GHz.....	44
Plot 48. Out of Band Radiated Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 1 GHz – 5.15 GHz.....	45
Plot 49. Out of Band Radiated Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 5.35 GHz – 5.47 GHz.....	45
Plot 50. Out of Band Radiated Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 5.725 GHz - 18 GHz.....	46
Plot 51. Out of Band Radiated Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 18 GHz – 26 GHz.....	46
Plot 52. Inband Conducted Spurious, 5500 MHz, 802.11n 20MHz Bandwidth, 70 MHz Span	51
Plot 53. Inband Conducted Spurious, 5500 MHz, 802.11n 20MHz Bandwidth, 500 MHz Span	51
Plot 54. Inband Conducted Spurious, 5700 MHz, 802.11n 20MHz Bandwidth, 70 MHz Span	52
Plot 55. Inband Conducted Spurious, 5700 MHz, 802.11n 20MHz Bandwidth, 500 MHz Span	52
Plot 56. Inband Conducted Spurious, 5500 MHz, 802.11n 40MHz Bandwidth, 140 MHz Span	53
Plot 57. Inband Conducted Spurious, 5500 MHz, 802.11n 40MHz Bandwidth, 1 GHz Span	53
Plot 58. Inband Conducted Spurious, 5700 MHz, 802.11n 40MHz Bandwidth, 140 MHz Span	54
Plot 59. Inband Conducted Spurious, 5700 MHz, 802.11n 40MHz Bandwidth, 1 GHz Span	54
Plot 60. Inband Radiated Spurious, 5500 MHz, 802.11n 20MHz Bandwidth.....	56
Plot 61. Inband Radiated Spurious, 5700 MHz, 802.11n 20MHz Bandwidth.....	56
Plot 62. Inband Radiated Spurious, 5500 MHz, 802.11n 40MHz Bandwidth.....	57
Plot 63. Inband Radiated Spurious, 5700 MHz, 802.11n 40MHz Bandwidth.....	57
Plot 64. Conducted Receiver Spurious Emission, 30 MHz – 1 GHz	59
Plot 65. Conducted Receiver Spurious Emission, 1GHz – 26.5 GHz	59
Plot 66. Radiated Receiver Spurious Emission, 30 MHz - 1 GHz	61
Plot 67. Radiated Receiver Spurious Emission, 1 GHz - 18 GHz.....	61
Plot 68. Radiated Receiver Spurious Emission, 18 GHz – 26.5 GHz	62
Plot 69. Bin 1 Radar Calibration	72
Plot 70. Move Time, 10 Second Span, 802.11n 40MHz Bandwidth.....	75
Plot 71. Close Time, 10 Second Span, 802.11n 40MHz Bandwidth.....	75
Plot 72. Close Time, 2 Second Span, 802.11n 40MHz Bandwidth.....	76

List of Terms and Abbreviations

AC	A lternating C urrent
ACF	A ntenna C orrection F actor
Cal	C alibration
<i>d</i>	M easurement D istance
dB	D ecibels
dBμA	D ecibels above one m icroamp
dBμV	D ecibels above one m icrovolt
dBμA/m	D ecibels above one m icroamp p er meter
dBμV/m	D ecibels above one m icrovolt p er meter
DC	D irect C urrent
E	E lectric F ield
DSL	D igital S ubscriber L ine
ESD	E lectrostatic D ischarge
EUT	E quipment U nder T est
<i>fc</i>	C arrier F requency
CISPR	C omite I nternational S pecial des P erturbations R adioelectriques (I nternational S pecial C ommittee on R adio I nterference)
GRP	G round R eference P lane
H	M agnetic F ield
HCP	H orizontal C oupling P lane
Hz	H ertz
IEC	I nternational E lectrotechnical C ommission
kHz	k ilo H ertz
kPa	k ilo P ascal
kV	k ilovolt
LISN	L ine I mpedance S tabilization N etwork
MHz	M ega H ertz
μ H	m icro H enry
μ F	m icro F arad
μ s	m icro s econds
PRF	P ulse R epetition F requency
RF	R adio F requency
RMS	R oot- M ean- S quare
V/m	V olts p er meter
VCP	V ertical C oupling P lane

I. Requirements Summary

A. Requirements Summary

ETSI EN 301 893 Section Number	Descriptive Name	Compliance			Comments
		Yes	No	N/A	
Sections 4.2	Carrier Frequencies	✓			Compliant
Sections 4.3	Nominal Channel Bandwidth and Occupied Channel Bandwidth	✓			Compliant
Sections 4.4	RF Output Power	✓			Compliant
	Transmit Power Control (TPC)	✓			Compliant
	Power Density	✓			Compliant
Sections 4.5	Transmitter Unwanted Emissions				
4.5.1	Out of Band Unwanted Emissions – Conducted	✓			Compliant
	Out of Band Unwanted Emissions – Radiated	✓			Compliant
4.5.2	In Band Unwanted Emissions – Conducted	✓			Compliant
	In Band Unwanted Emissions – Radiated	✓			Compliant
Sections 4.6	Receiver Spurious Emissions – Conducted	✓			Compliant
	Receiver Spurious Emissions – Conducted	✓			Compliant
Sections 4.7	Dynamic Frequency Selection (DFS)				
4.7	DFS Calibration	✓			Compliant
	DFS Bandwidth			✓	Not Applicable for Slave Device
4.7.2.1	Channel Availability Check			✓	Not Applicable for Slave Device
4.7.2.2	Off Channel CAC			✓	Not Applicable for Slave Device
4.7.2.3	In-Service Monitoring			✓	Not Applicable for Slave Device
4.7.2.4	Channel Shutdown	✓			Compliant
4.7.2.5	Non-Occupancy Period			✓	Not Applicable for Slave Device
Sections 4.8	Medium Access Protocol	✓			Compliant
Sections 4.9	User Access Restrictions	✓			Compliant

Table 1. Summary of EMC ETSI EN 301 893 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by Ubiquiti Networks to perform testing on a M5G.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Ubiquiti Networks model M5G.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	M5G
Model(s) Number:	M5G
EUT Specifications:	Primary Power: 5V DC, 1 A
	Secondary Power: N/A
Lab Ambient (Normal) Test Conditions:	Temperature: 15-35° C
	Relative Humidity: 30-60%
	Atmospheric Pressure: 860-1060 mbar
Extreme Test Conditions:	Voltage: 230 VAC +/- 15%
	Temperature: -20 to +55° C
	Relative Humidity: 30-60%
Evaluated by:	Anderson Soungpanya
Report Date(s):	January 13, 2010

B. References

ETSI EN 301.893 V1.5.1 (2008-12)	Broadband Radio Access Networks (BRAN); 5GHz high performance RLAN; Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive.
---	--

Table 2. Test References

C. Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick St., Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

D. Description of Test Sample

The Ubiquiti Networks M5G, Equipment Under Test (EUT), is an Outdoor 5GHz CPE device.

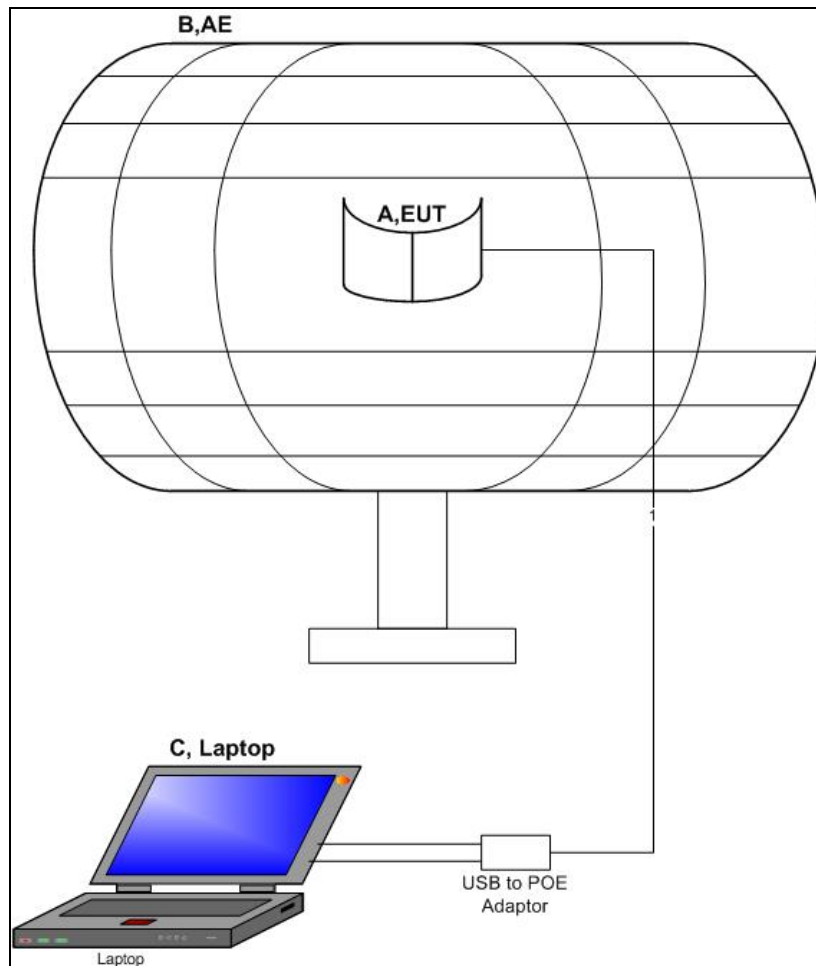


Figure 1. Block Diagram of Test Configuration 1

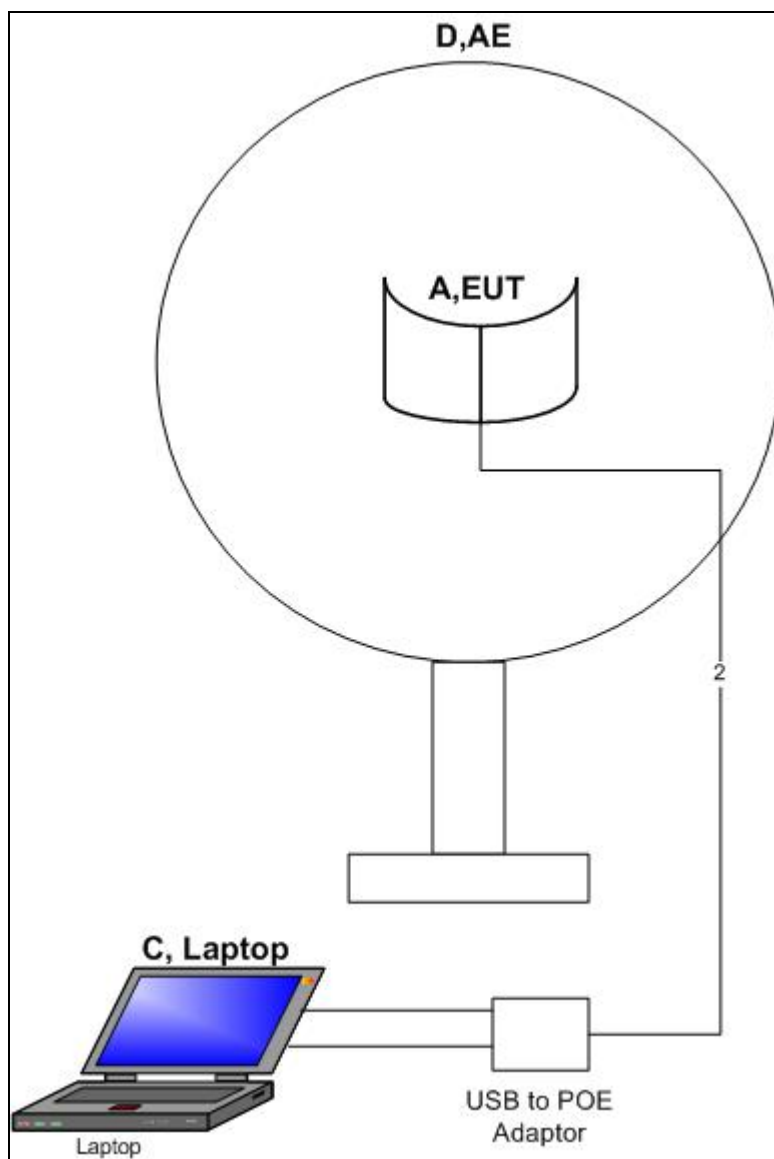


Figure 2. Block Diagram of Test Configuration 2

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
A	5.8GHz Radio	M5G	MET_Test_M5G01

Table 3. Equipment Configuration

F. Support Equipment

Ubiquiti Networks supplied support equipment necessary for the operation and testing of the M5G. All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number
B	Grid Antenna	Ubiquiti	2009-8-13
C	Laptop	Dell	Vastro 1000
D	Dish Antenna	Ubiquiti	Proto 1

Table 4. Support Equipment

G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port Name
Configuration 1						
1	A,EUT	CAT 5E	1	3	Y	C, Laptop
Configuration 2						
2	A,EUT	CAT 5E	1	3	Y	C, Laptop

Table 5. Ports and Cabling Information

H. Mode of Operation

The EUT operates in OFDM mode.

I. Method of Monitoring EUT Operation

A Spectrum Analyzer and a Power Meter was use to monitor the EUT's transmitter channel and power output.

J. Modifications

a) Modifications to EUT

No modifications were made to the EUT

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Ubiquiti Networks upon completion of testing.

III. Conformance Requirements

4.2 Centre Frequencies

Test Requirement(s): ETSI EN 301 893, Clause 5.3.2:

4.2.1 Definition

The centre frequency is the centre of the channel declared by the manufacturer as part of the declared channel plan(s).

4.2.2 Limits

The actual centre frequency for any given channel declared by the manufacturer shall be maintained within the range $f_c \pm 20$ ppm.

Test Procedure: The EUT was placed in an environmental chamber and the RF port was connected directly to a spectrum analyzer through an attenuator. Depending on which band was being investigated, the EUT was set to transmit at the f_c indicated above at a normal power level. If the EUT was capable of transmitting a CW carrier then the spectrum analyzer's frequency counting function was used to measure the actual frequency. If only a modulated carrier was available then the frequency relative to -10dBc above and below the carrier was measured and the carrier frequency was determined using $(f1+f2)/2$. The frequency of the carrier was measured at normal and extreme conditions. The resulting carrier frequencies were tabulated below and the frequency error determined.

Test Results: The EUT was found to be compliant with the limits set forth in Clause 5.3.2.

Test Engineer: Anderson Soungpanya

Test Date: 10/07/09

(5500MHz)				
	Voltage (DC)	Temperature (C)	Frequency (MHz)	PPM
Reference @ 5VDC 20C	4	55	5499.994598	1.249
	5	55	5499.994880	1.300
	6	55	5499.995182	1.355
	4	20	5499.989932	0.400
	5	20	5499.987731	0.000
5499.987731	6	20	5499.987909	0.032
	4	-20	5500.011183	4.264
	5	-20	5500.011694	4.357
	6	-20	5500.011202	4.267
(5700MHz)				
	Voltage (DC)	Temperature (C)	Frequency (MHz)	PPM
Reference @ 5VDC 20C	4	55	5699.993644	1.199
	5	55	5699.994396	1.331
	6	55	5699.994995	1.436
	4	20	5699.989354	0.447
	5	20	5699.986808	0.000
5699.986808	6	20	5699.986895	0.015
	4	-20	5700.012143	4.445
	5	-20	5700.012357	4.482
	6	-20	5700.012453	4.499

Table 6. Carrier Frequencies, Test Results

4.3 Nominal Channel Bandwidth and Occupied Channel Bandwidth

Test Requirement(s): ETSI EN 301 893, Clause 5.3.3:

4.3.1 Definition

The nominal channel bandwidth is the widest band of frequencies, inclusive of guard bands, assigned to a single channel.

The occupied channel bandwidth is the frequency bandwidth of the signal power at the -6 dBc points when measured with a 100 kHz resolution bandwidth.

NOTE: dBc is the spectral density relative to the maximum spectral power density of the transmitted signal.

4.3.2 Limit

The nominal bandwidth shall be in the range from 5 MHz to 40 MHz.

The occupied channel bandwidth shall be between 80 % and 100 % of the declared nominal channel bandwidth. In case of smart antenna systems (devices with multiple transmit chains) each of the transmit chains shall meet this requirement.

NOTE: The limit for occupied bandwidth is not applicable for devices with a nominal bandwidth of 40 MHz when temporarily operating in a mode in which they transmit only in the upper or lower 20 MHz part of a 40 MHz channel (e.g. to transmit a packet in the upper or lower 20 MHz part of a 40 MHz channel).

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

In case of conducted measurements on smart antenna systems (devices with multiple transmit chains) measurements need only to be performed on one of the active transmit chains (antenna outputs).

Test Results: The EUT as tested was found compliant with the specified limits in clause 5.3.3.

Test Engineer: Anderson Soungpanya

Test Date: 09/10/09







Figure 3. Occupied Bandwidth Test Setup

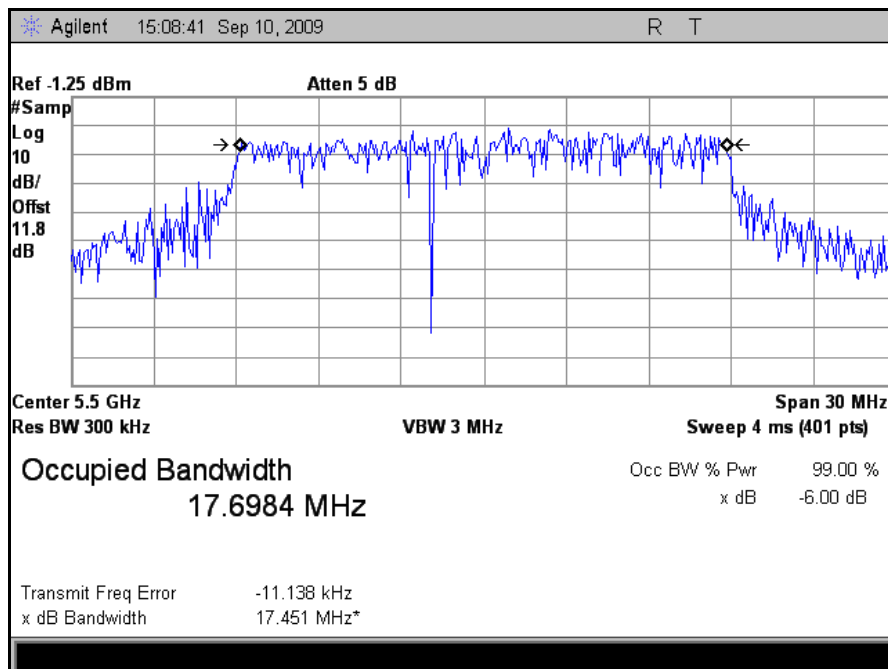


Plot 1. Occupied Bandwidth, 5500 MHz, 802.11n 20MHz

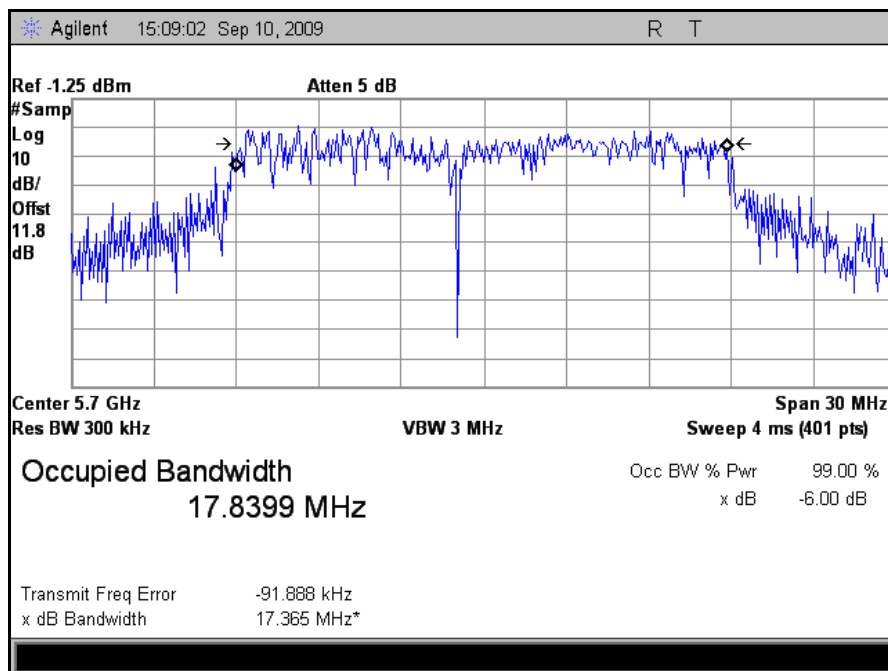

Plot 2. Occupied Bandwidth, 5700 MHz, 802.11n 20MHz

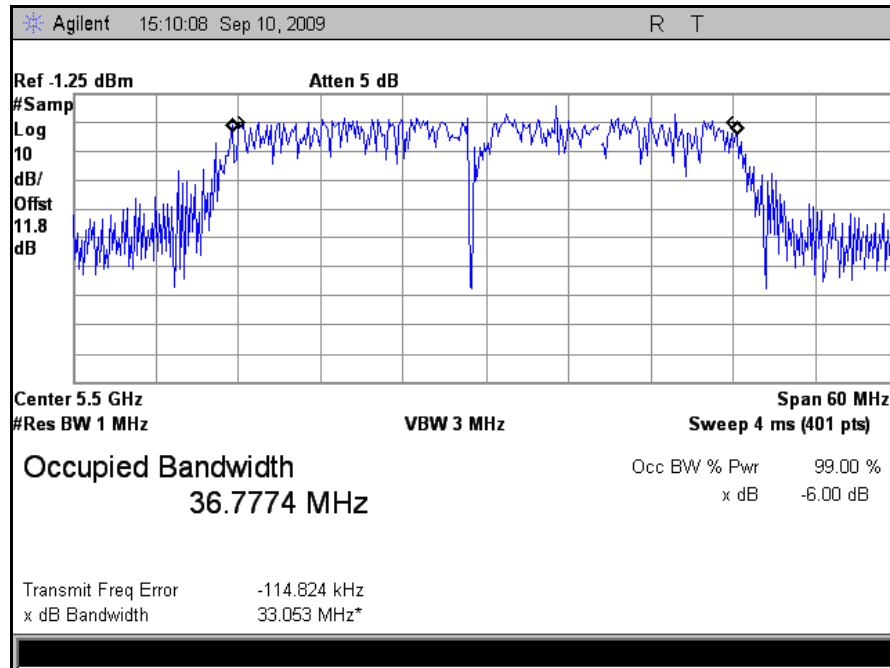

Plot 3. Occupied Bandwidth, 5500 MHz, 802.11n 40MHz

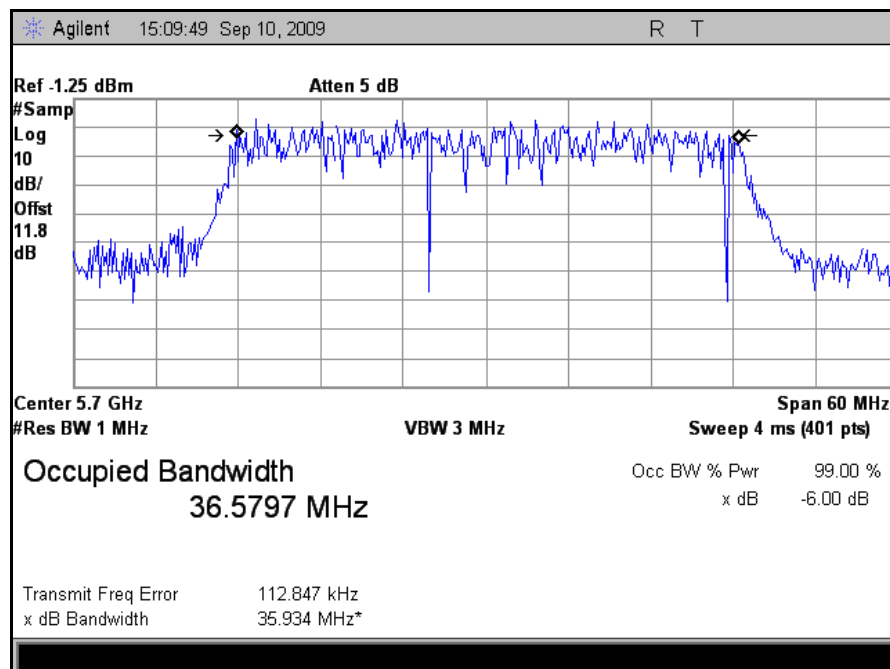

Plot 4. Occupied Bandwidth, 5700 MHz, 802.11n 40MHz

4.4 RF Output Power, Transmit Power Control (TPC), and Power Density

Test Requirement(s): ETSI EN 301 893, Clause 5.3.4:

4.4.1 Definitions

4.4.1.1 – RF Power

The RF output power is the mean equivalent isotropically radiated power (EIRP) during a transmission burst.

4.4.1.2 – Transmit Power Control (TPC)

Transmit Power Control (TPC) is a mechanism to be used by the RLAN device to ensure a mitigation factor of at least 3 dB on the aggregate power from a large number of devices. This requires the RLAN device to have a TPC range from which the lowest value is at least 6 dB below the values for mean EIRP given in Table 7.

TPC is not required for channels whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz.

4.4.1.3 – Power Density

The power density is the mean Equivalent Isotropically Radiated Power (EIRP) density during a transmission burst.

4.4.2 Limits

The limits below are applicable to the system as a whole and in any possible configuration. This includes smart antenna systems (devices with multiple transmit chains).

4.4.2.1 Limit: RF Output Power and Power Density at the Highest Power Level

For devices with TPC, the RF output power and the power density when configured to operate at the highest stated power level of the TPC range shall not exceed the levels given in Table 7.

For devices without TPC, the limits in Table 7 shall be reduced by 3 dB, except when operating on channels whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz.

Frequency range	Mean EIRP limit	Mean EIRP Density limit
5 150 MHz to 5 350 MHz	23 dBm	10 dBm/MHz
5 470 MHz to 5 725 MHz	30 dBm (see Note)	17 dBm/MHz (see note)

Table 7. Mean EIRP Limits for RF Output Power and Power Density at the Highest Power Level

Note: For Slave devices without a Radar Interference Detection function the mean EIRP shall be less than 23 dBm and the mean EIRP density shall be less than 10 dBm/MHz.

4.4.2.2 Limit: RF Output Power at the Lowest Power Level of the TPC Range

For devices using TPC, the RF output power during a transmission burst when configured to operate at the lowest stated power level of the TPC range shall not exceed the levels given in Table 8.

Frequency range	Mean EIRP limit
5 250 MHz to 5 350 MHz	17 dBm
5 470 MHz to 5 725 MHz	24 dBm (see Note)

Table 8. Mean EIRP Limits for RF Output Power at the Lowest Power Level of the TPC Range

Note: For Slave devices without a Radar Interference Detection function the mean EIRP shall be less than 17 dBm.

The limits in Table 8 do not apply for devices without TPC or when operating on channels whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz.

Test Procedures:

RF Output Power

The EUT was connected directly to a spectrum analyzer capable of measuring the average RF power of a modulated carrier. Measurements were carried out in all modulations available. Frequency was at f_c of 5500MHz and 5700MHz for the Higher Sub-band. Both normal and extreme test conditions were observed.

The EIRP was determined from the equation $P = A + G + 10 \log (1/x)$; where A is the measured power, x is the duty cycle and G is the antenna assembly gain.

Transmit Power Control (TPC)

The EUT was connected directly to a spectrum analyzer capable of measuring the average RF power of a modulated carrier. Measurements were carried out in all modulations available. Frequency was at f_c of 5500MHz and 5700MHz for the Higher Sub-band. Both normal and extreme test conditions were observed.

Power Density

The EUT was connected directly to a spectrum analyzer capable of measuring the average RF power of a modulated carrier. Measurements were carried out in all modulations available. Frequency was at f_c of 5500MHz and 5700MHz for the Higher Sub-band. The spectrum analyzer was initially set with a RBW and VBW of 1MHz and a span 3 times that of the carrier width. The max hold function was used to determine the frequency which gave the maximum value across the occupied band of the carrier. The spectrum analyzer was reset to use the power density function at the frequency found previously. The power density was then measured over 1MHz resolution.

In case of conducted measurements on smart antenna systems operating in a mode with multiple transmit chains active simultaneously, the output power of each transmit chain shall be measured separately to calculate the total power for the UUT.

Test Results:

The EUT as tested was found compliant with the specified limits in clause 5.3.4.

Test Engineer:

Anderson Soungpanya

Test Date:

10/7/09




Figure 4. Output Power, TPC, and Power Density Test Setup

Effective Isotropic Radiated Power Results

Maximum Average Power Under Normal and Extreme Conditions						
Frequency (MHz)	Temperature (C)	Voltage (VDC)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBi)	Limit (dBi)
5500	22	5	-1.49	28	26.51	30
5500	-20	4	0.66	28	28.66	30
5500	-20	6	0.72	28	28.72	30
5500	55	4	-3.70	28	24.30	30
5500	55	6	-3.77	28	24.23	30
5700	22	5	-1.68	28	26.32	30
5700	-20	4	0.93	28	28.93	30
5700	-20	6	1.02	28	29.02	30
5700	55	4	-3.39	28	24.61	30
5700	55	6	-3.21	28	24.79	30

Table 9. RF Output Power, Test Results, 802.11n 20MHz

Maximum Average Power Under Normal and Extreme Conditions						
Frequency (MHz)	Temperature (C)	Voltage (VDC)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBi)	Limit (dBi)
5500	22	5	-0.49	28	27.51	30
5500	-20	4	1.51	28	29.51	30
5500	-20	6	1.49	28	29.49	30
5500	55	4	-3.74	28	24.26	30
5500	55	6	-3.70	28	24.30	30
5700	22	5	-0.48	28	27.52	30
5700	-20	4	0.87	28	28.87	30
5700	-20	6	0.93	28	28.93	30
5700	55	4	-3.41	28	24.59	30
5700	55	6	-3.27	28	24.73	30

Table 10. RF Output Power, Test Results, 802.11n 40MHz

Effective Isotropic Radiated Power Results

Minumim Average Power Under Normal and Extreme Conditions						
Frequency (MHz)	Temperature (C)	Voltage (VDC)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBi)	Limit (dBi)
5500	22	5	-10.63	28	17.37	24
5500	-20	4	-4.08	28	23.92	24
5500	-20	6	-4.10	28	23.90	24
5500	55	4	-12.80	28	15.20	24
5500	55	6	-12.78	28	15.22	24
5700	22	5	-10.66	28	17.34	24
5700	-20	4	-4.20	28	23.80	24
5700	-20	6	-4.21	28	23.79	24
5700	55	4	-11.98	28	16.02	24
5700	55	6	-12.13	28	15.87	24


Table 11. Transmit Power Control, Test Results, 802.11n 20MHz

Minumim Average Power Under Normal and Extreme Conditions						
Frequency (MHz)	Temperature (C)	Voltage (VDC)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBi)	Limit (dBi)
5500	22	5	-10.06	28	17.94	24
5500	-20	4	-4.93	28	23.07	24
5500	-20	6	-5.04	28	22.96	24
5500	55	4	-12.42	28	15.58	24
5500	55	6	-12.33	28	15.67	24
5700	22	5	-9.71	28	18.29	24
5700	-20	4	-4.50	28	23.50	24
5700	-20	6	-4.65	28	23.35	24
5700	55	4	-11.79	28	16.21	24
5700	55	6	-11.88	28	16.12	24


Table 12. Transmit Power Control, Test Results, 802.11n 40MHz

Power Density


Mode	Frequency (GHz)	Measured Maximum Spectral Power Density (dBm)	Antenna Gain	Maximum Spectral Power Density EIRP (dBm)	Maximum SPD Limit (dBm)
802.11n 20MHz	5500	-12.39	28	15.61	17
	5700	-12.64	28	15.36	17
802.11n 40MHz	5500	-14.47	28	13.53	17
	5700	-15.04	28	12.96	17

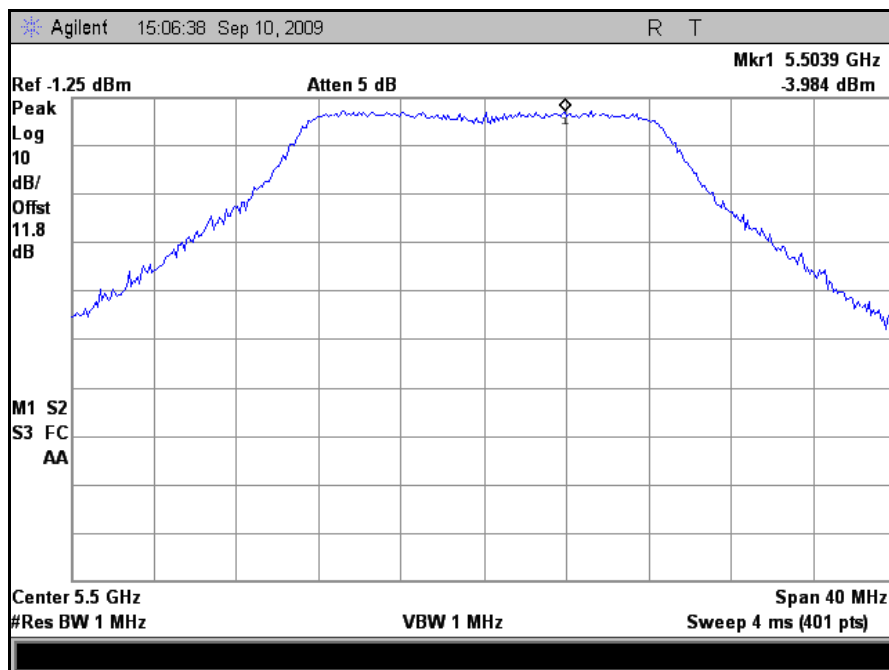


Plot 5. Power Spectral Density, 5500MHz, Determination, 802.11n 20MHz

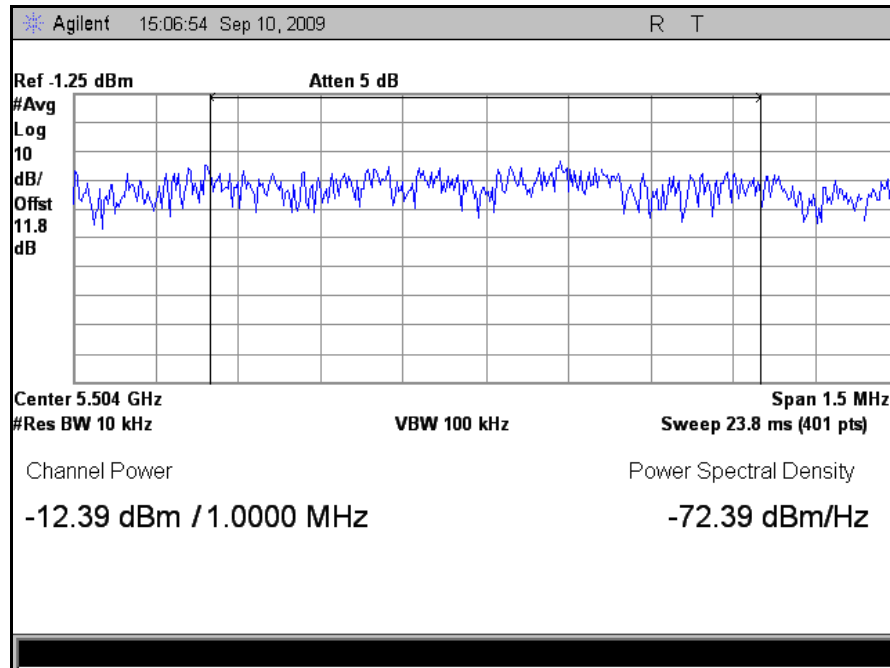


Plot 6. Power Spectral Density, 5500MHz, 802.11n 20MHz

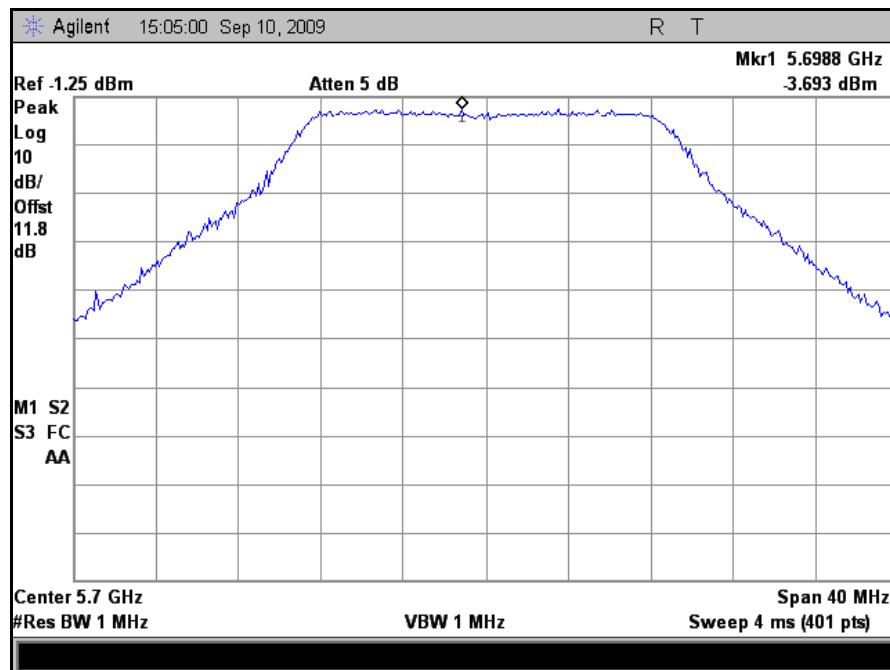


Plot 7. Power Spectral Density, 5700MHz, Determination, 802.11n 20MHz

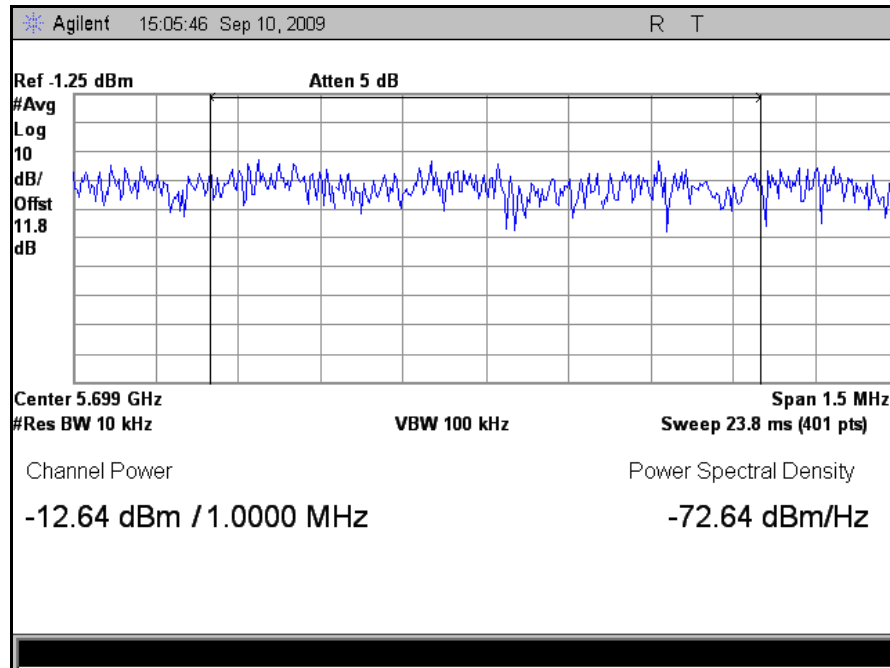


Plot 8. Power Spectral Density, 5700MHz, 802.11n 20MHz

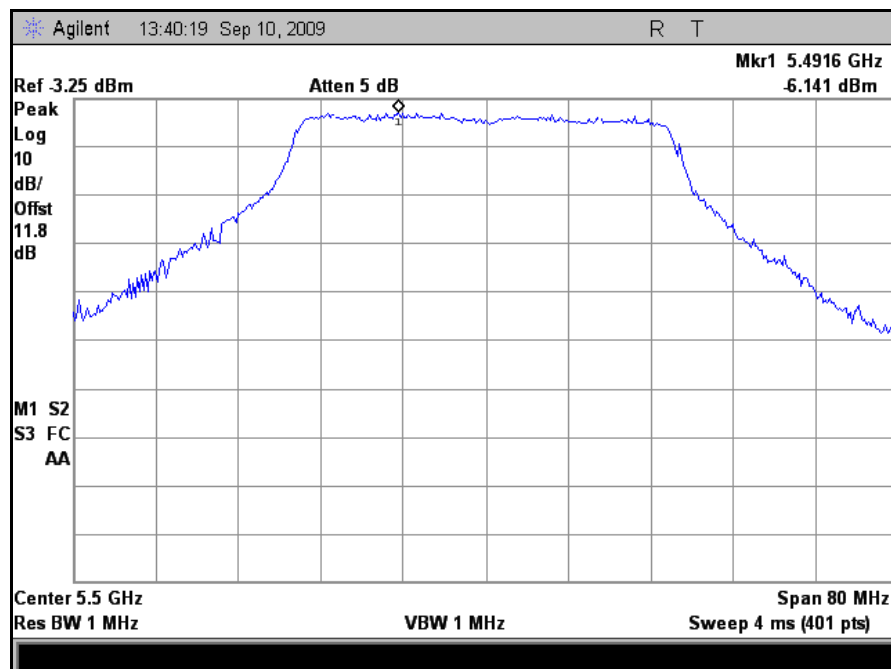


Plot 9. Power Spectral Density, 5500MHz, Determination, 802.11n 40MHz

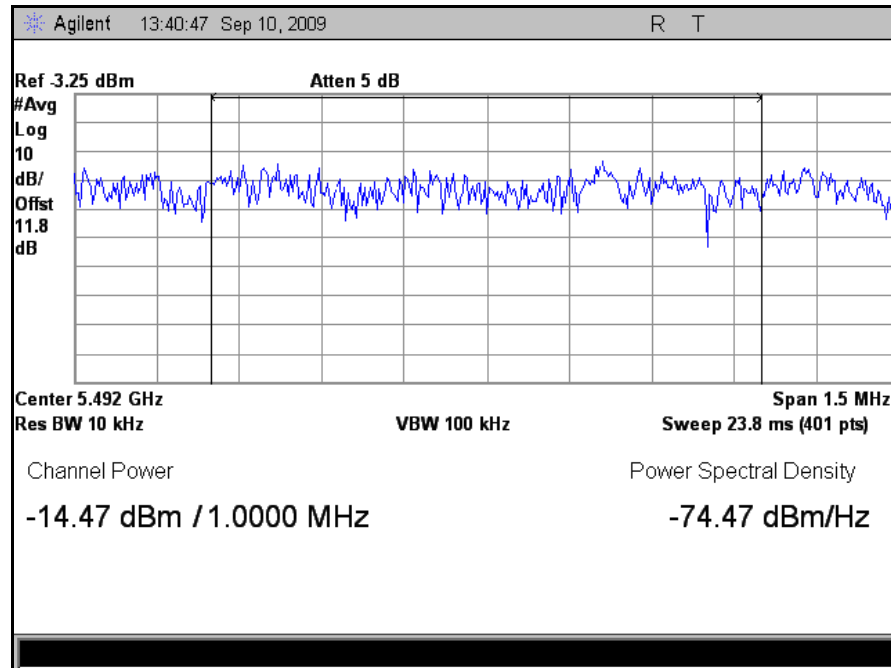

Plot 10. Power Spectral Density, 5500MHz, 802.11n 40MHz

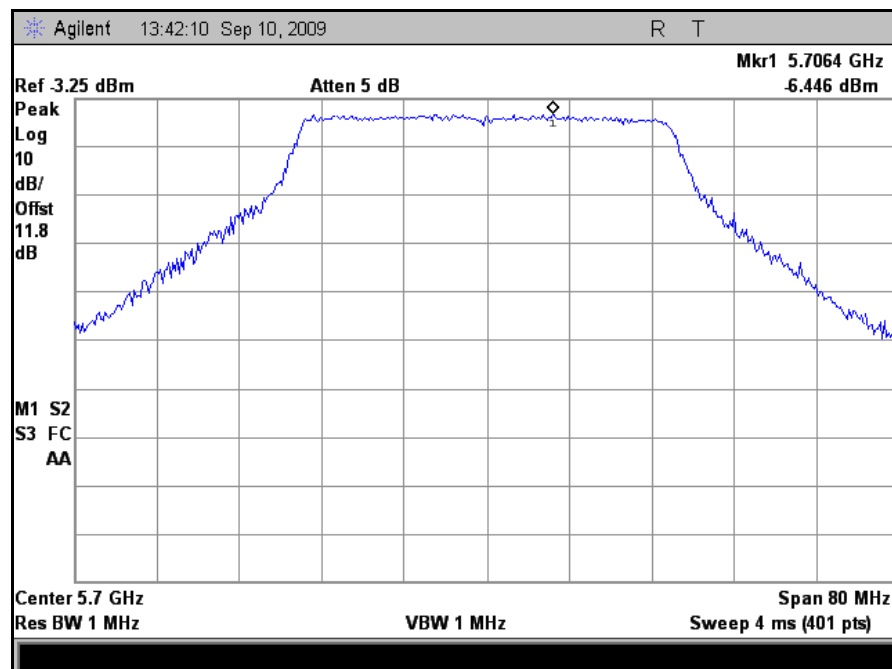

Plot 11. Power Spectral Density, 5700MHz, Determination, 802.11n 40MHz

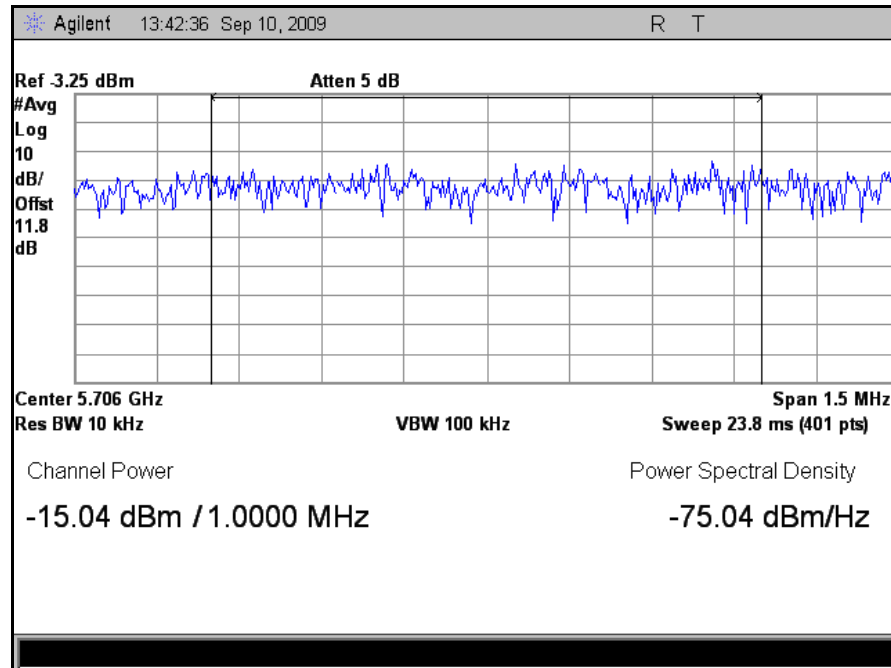

Plot 12. Power Spectral Density, 5700MHz, 802.11n 40MHz

4.5.1 Transmitter Unwanted Emissions Outside the 5GHz RLAN Bands (Conducted)

Test Requirement(s): EN 301 893, Clause 5.3.5:

4.5.1.1 Definition

These are conducted radio frequency emissions outside the 5GHz RLAN bands when the RF output port is connected to a spectrum analyzer.

4.5.1.2 Limit

The level of unwanted emissions shall not exceed the limits given below.

Frequency range	Maximum power ERP	Resolution Bandwidth
30 MHz to 47 MHz	-36dBm	100KHz
47 MHz to 74 MHz	-54dBm	100KHz
74 MHz to 87,5 MHz	-36dBm	100KHz
87,5 MHz to 118 MHz	-54dBm	100KHz
118 MHz to 174 MHz	-36dBm	100KHz
174 MHz to 230 MHz	-54dBm	100KHz
230 MHz to 470 MHz	-36dBm	100KHz
470 MHz to 862 MHz	-54dBm	100KHz
862 MHz to 1 GHz	-36dBm	100KHz
1 GHz to 5,15 GHz	-30dBm	1MHz
5,35 GHz to 5,47 GHz	-30dBm	1MHz
5,725 GHz to 26,5 GHz	-30dBm	1MHz

Test Procedure: The EUT was connected directly to a spectrum analyzer through an attenuator. The spectrum analyzer was initially set to the peak hold function or video averaging. Emissions were investigated from 30MHz up to 26.5GHz. If any emission exceeded the limits in the table above then the spectrum analyzer was reset with a resolution of 100KHz, zero span, and the spectrum investigate at 11 frequencies spaced 100KHz in a band ± 0.5 MHz centered on the failing frequency. The spectrum also was investigated from 1GHz to 5.15GHz, 5.35GHz to 5.47GHz and 5.725GHz to 26.5GHz using a resolution of 1MHz and a peak hold function or video averaging. Measurements were carried out in all modulations available. Frequency was at f_c of 5500MHz and 5700MHz for the Higher Sub-band.

Test Results: The EUT as tested was found compliant with the specified requirements of Clause 5.3.5.

Test Engineer: Anderson Soungpanya

Test Date: 10/05/09






Figure 5. Unwanted Conducted Emissions Outside Test Setup


Conducted Spurious Emissions Outside the 5GHz RLAN Bands

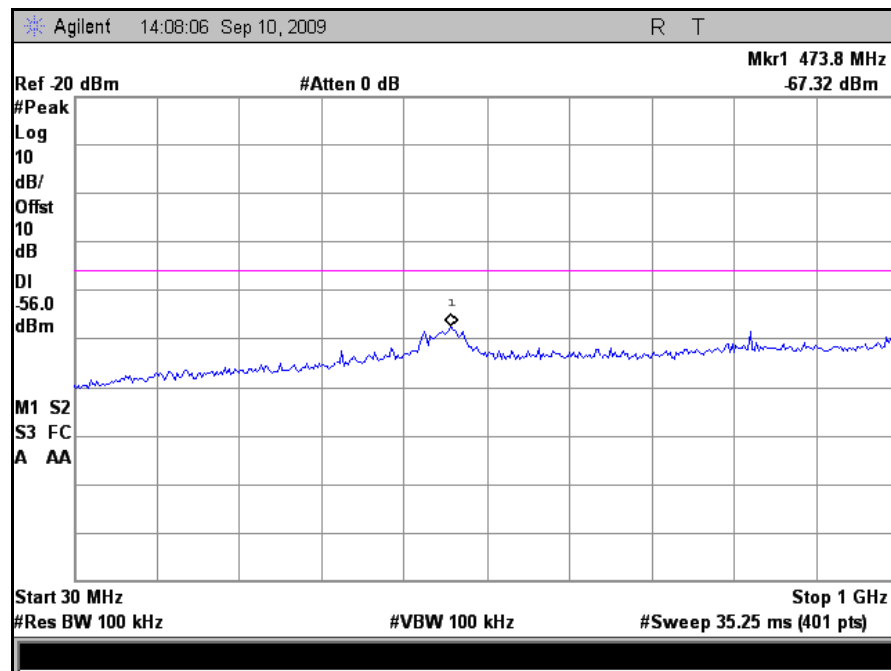


Plot 13. Out of Band Conducted Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 30 MHz – 1 GHz

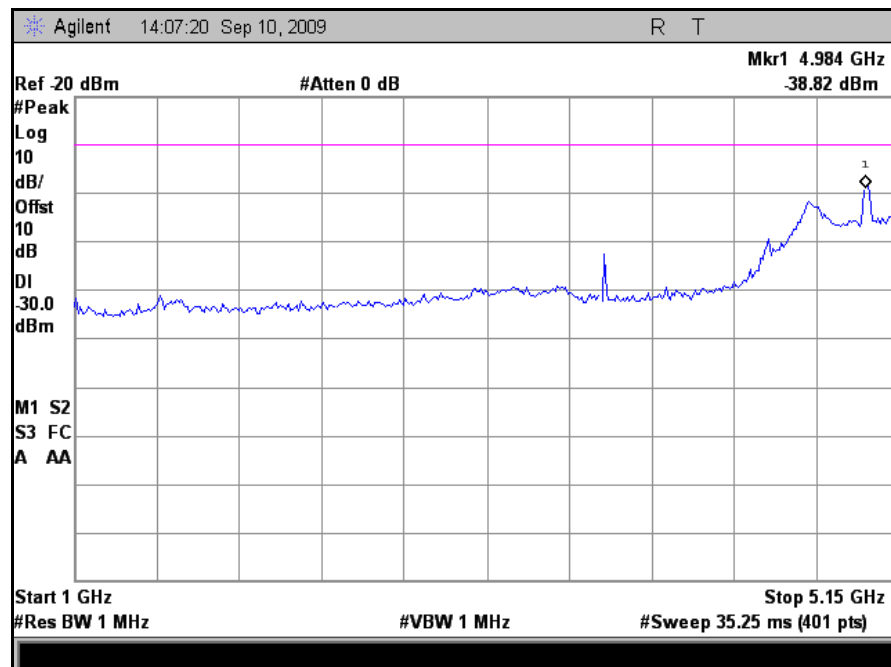


Plot 14. Out of Band Conducted Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 1 GHz – 5.15 GHz

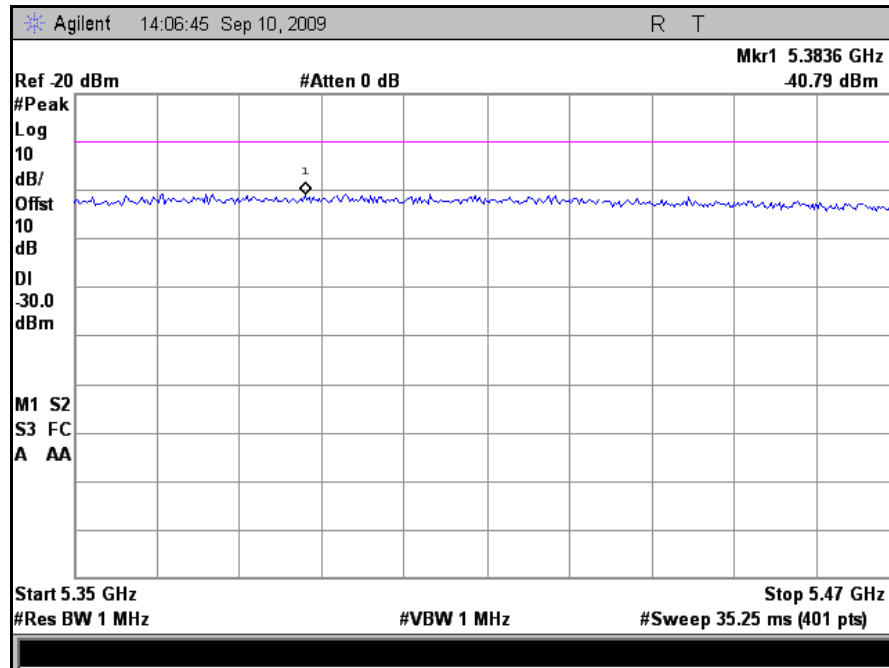


Plot 15. Out of Band Conducted Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 5.35 GHz – 5.47 GHz

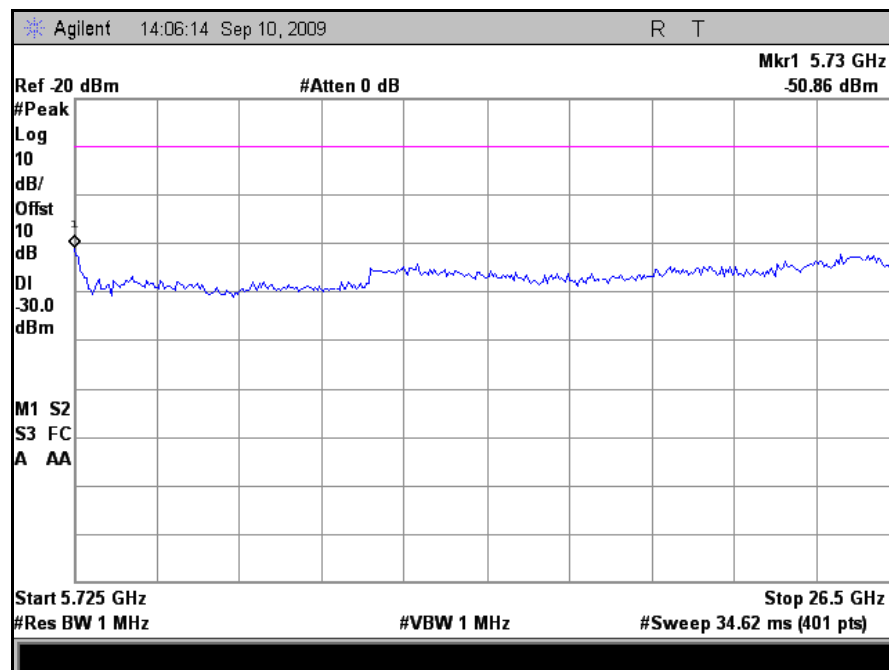


Plot 16. Out of Band Conducted Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 5.725 GHz - 26 GHz

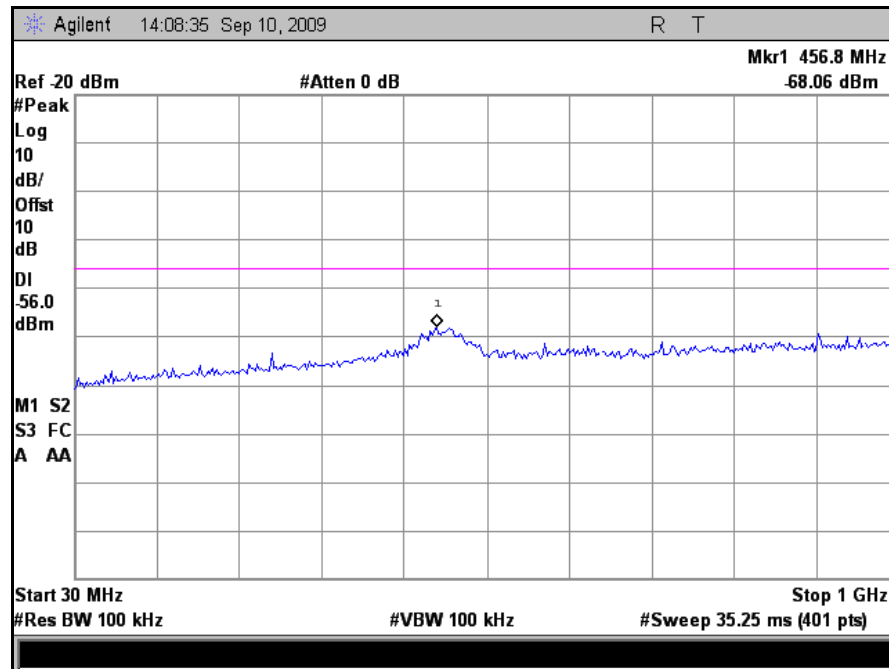


Plot 17. Out of Band Conducted Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 30 MHz – 1 GHz

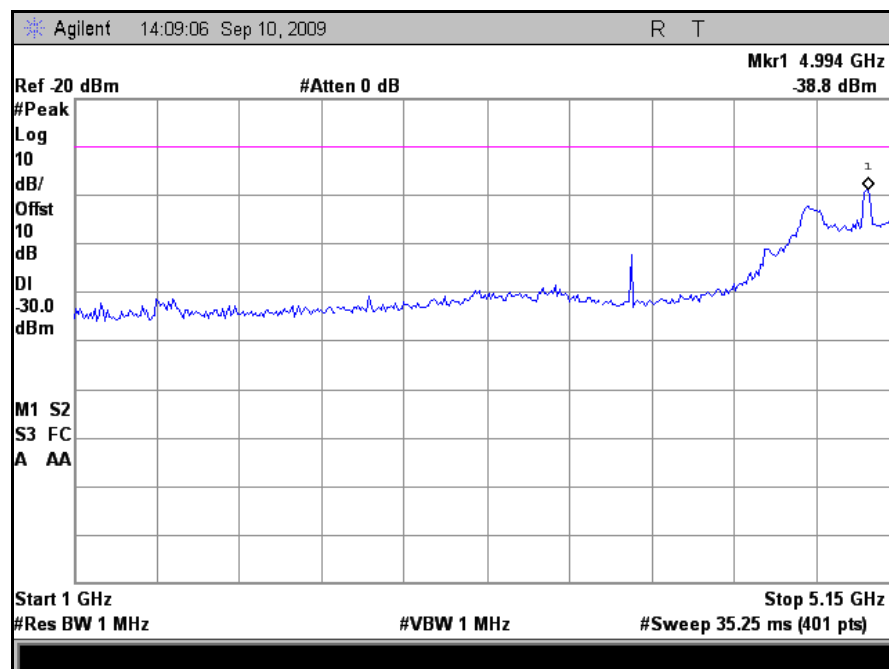


Plot 18. Out of Band Conducted Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 1 GHz – 5.15 GHz

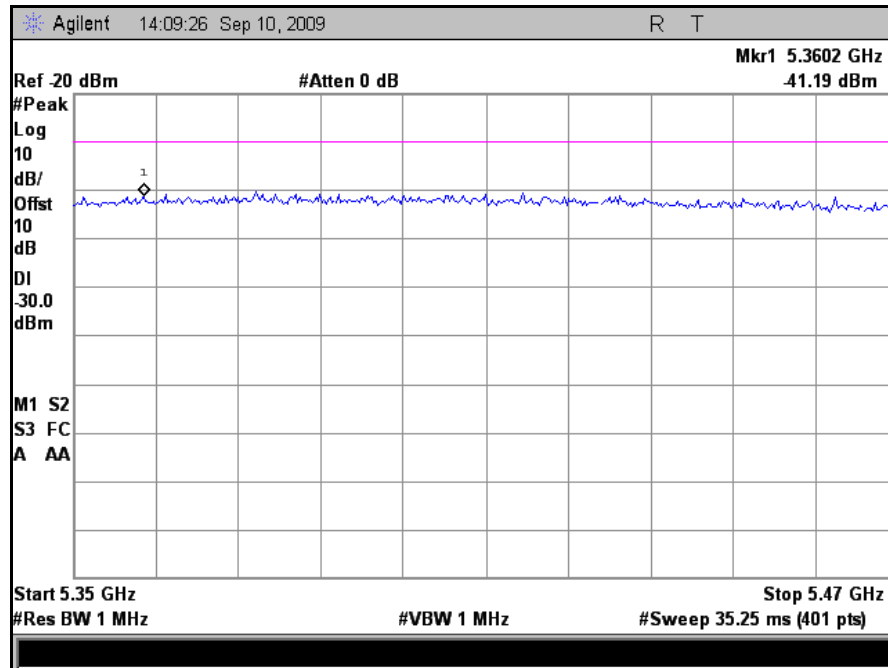


Plot 19. Out of Band Conducted Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 5.35 GHz – 5.47 GHz

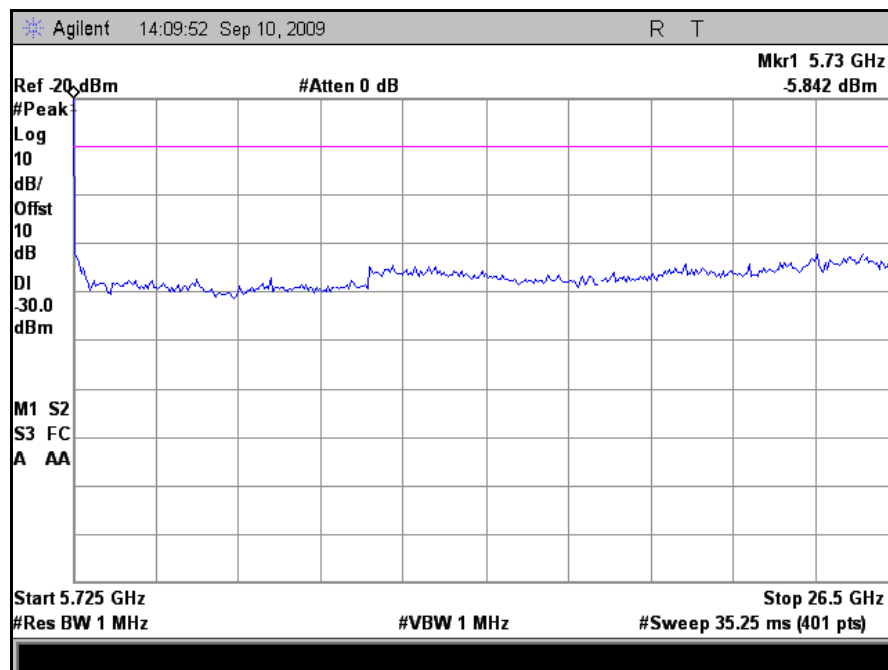


Plot 20. Out of Band Conducted Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 5.725 GHz - 26 GHz

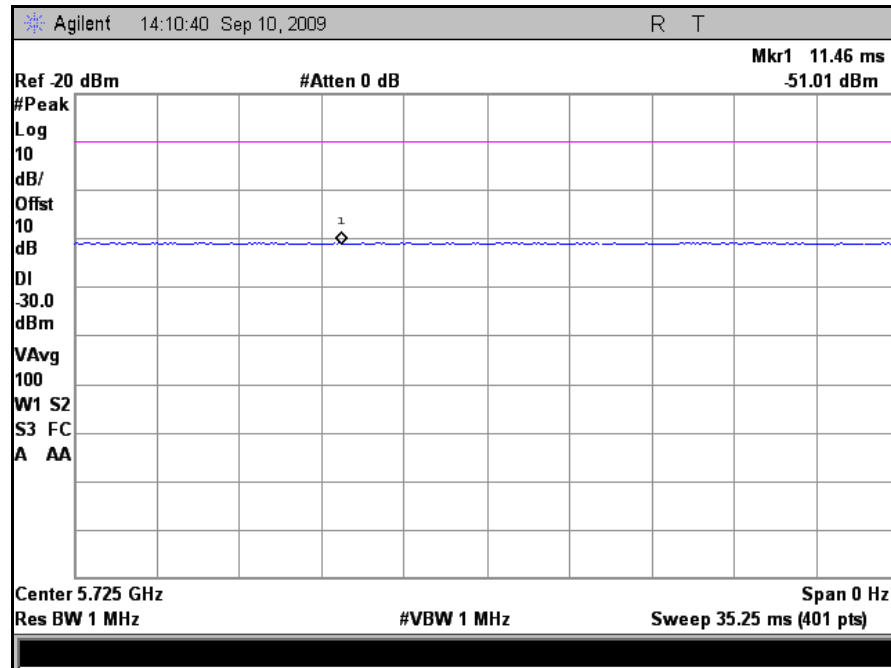


Plot 21. Out of Band Conducted Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, Zero Span at 5725 MHz

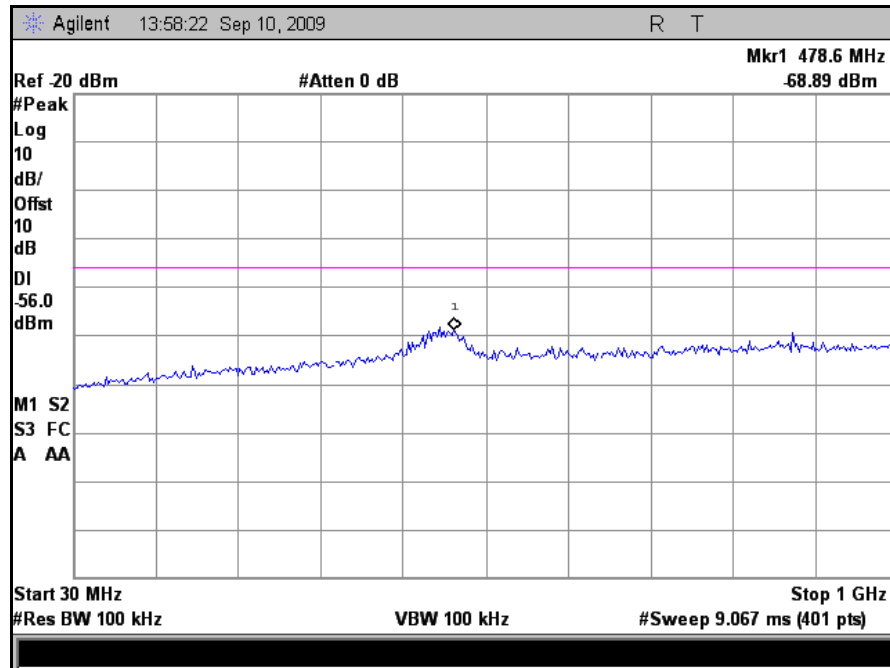


Plot 22. Out of Band Conducted Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 30 MHz – 1 GHz

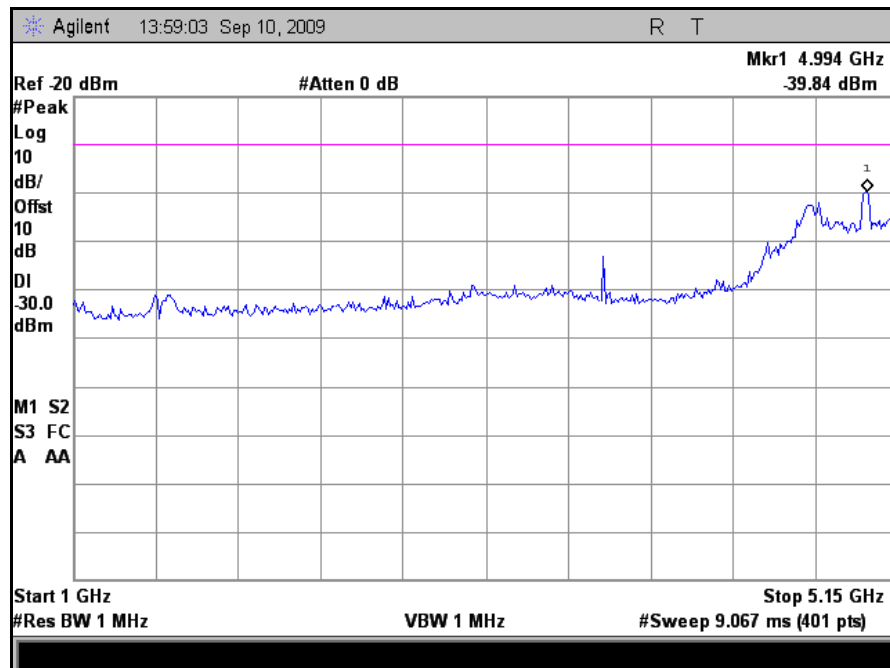


Plot 23. Out of Band Conducted Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 1 GHz – 5.15 GHz

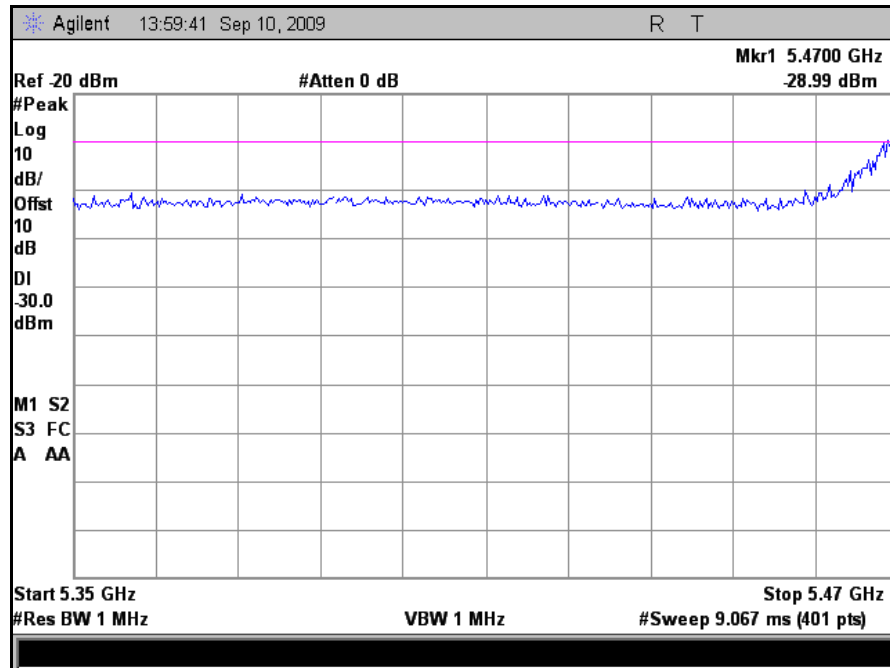


Plot 24. Out of Band Conducted Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 5.35 GHz – 5.47 GHz

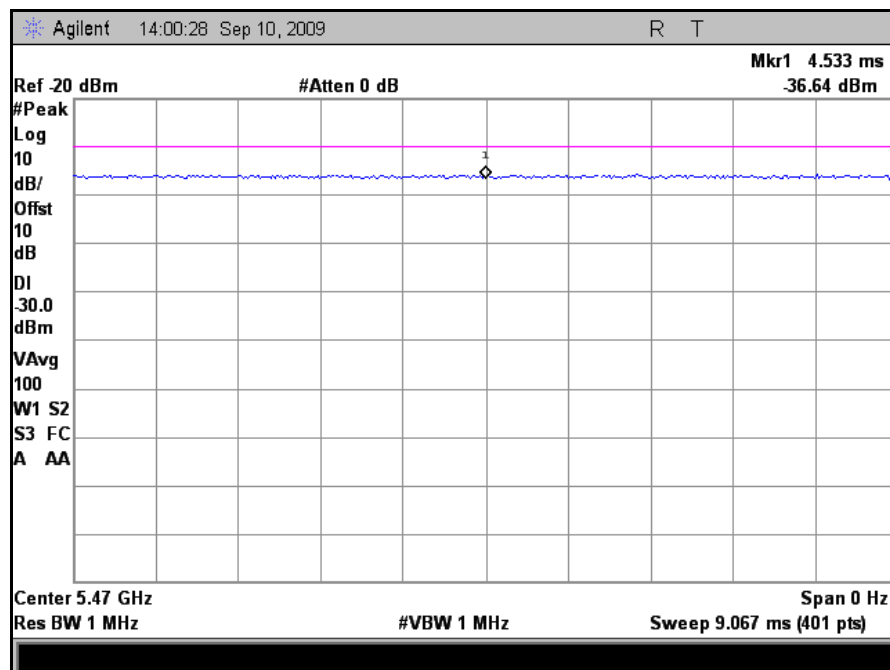


Plot 25. Out of Band Conducted Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, Zero Span at 5470 MHz

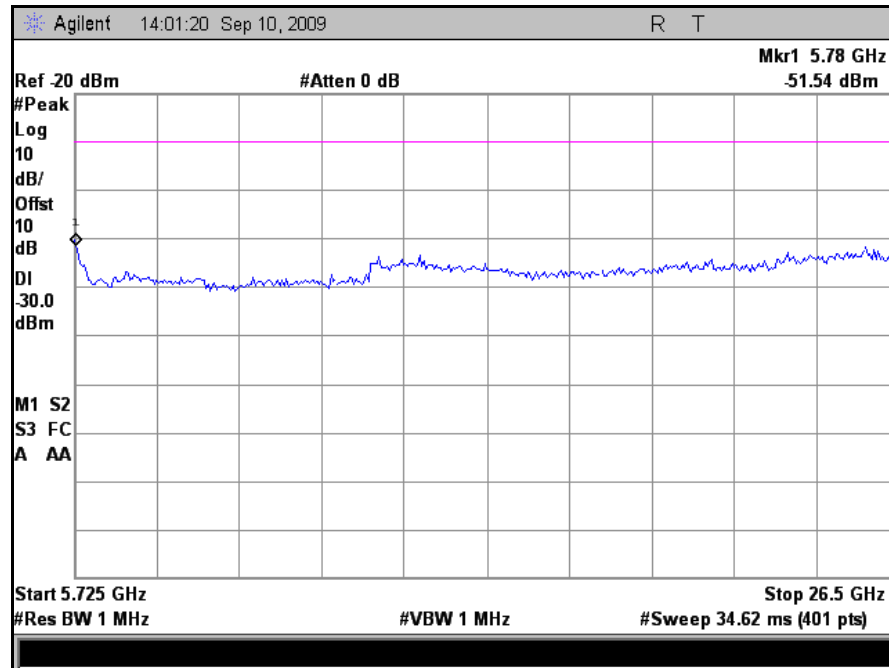


Plot 26. Out of Band Conducted Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 5.725 GHz - 26 GHz

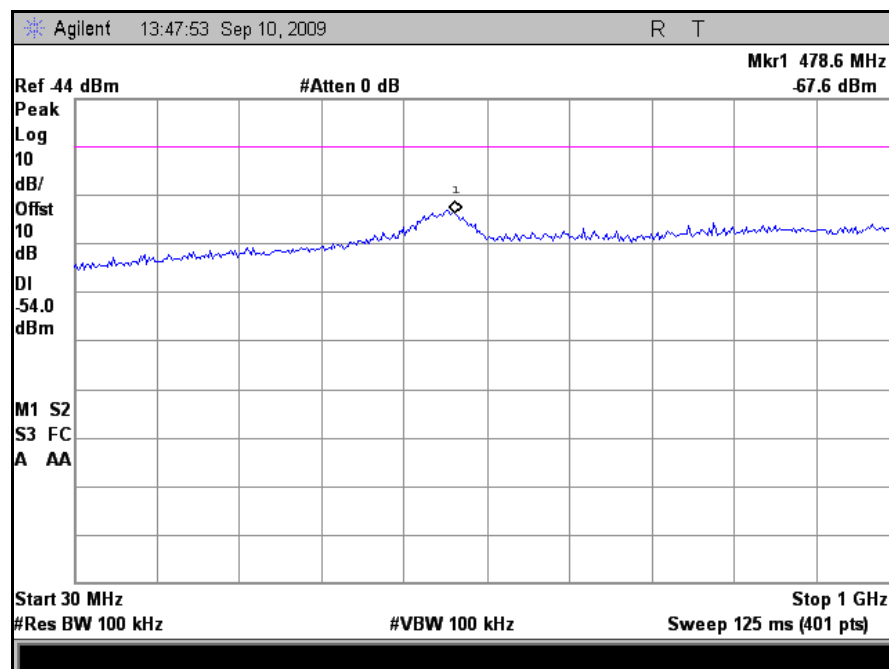


Plot 27. Out of Band Conducted Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 30 MHz – 1 GHz

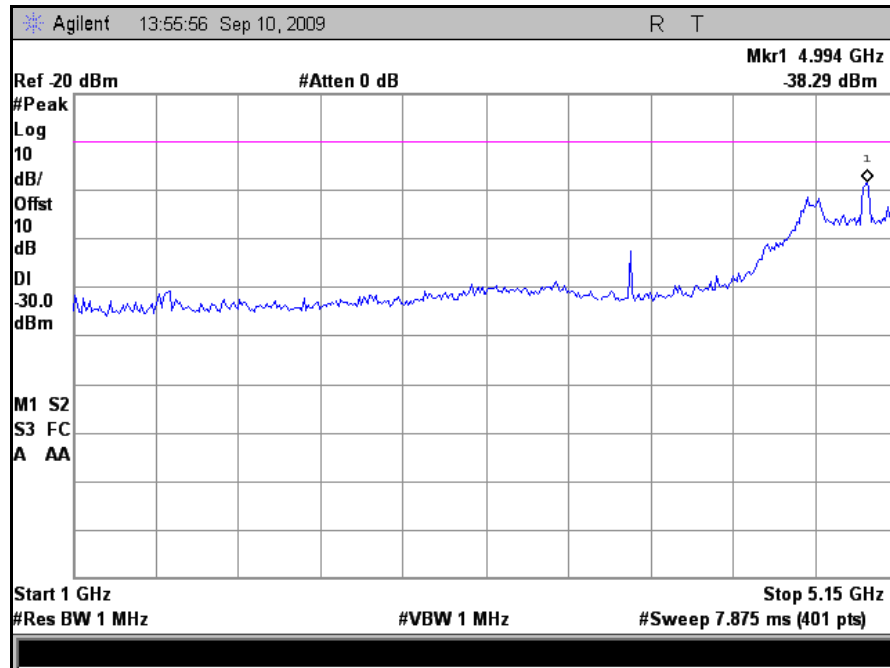


Plot 28. Out of Band Conducted Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 1 GHz – 5.15 GHz

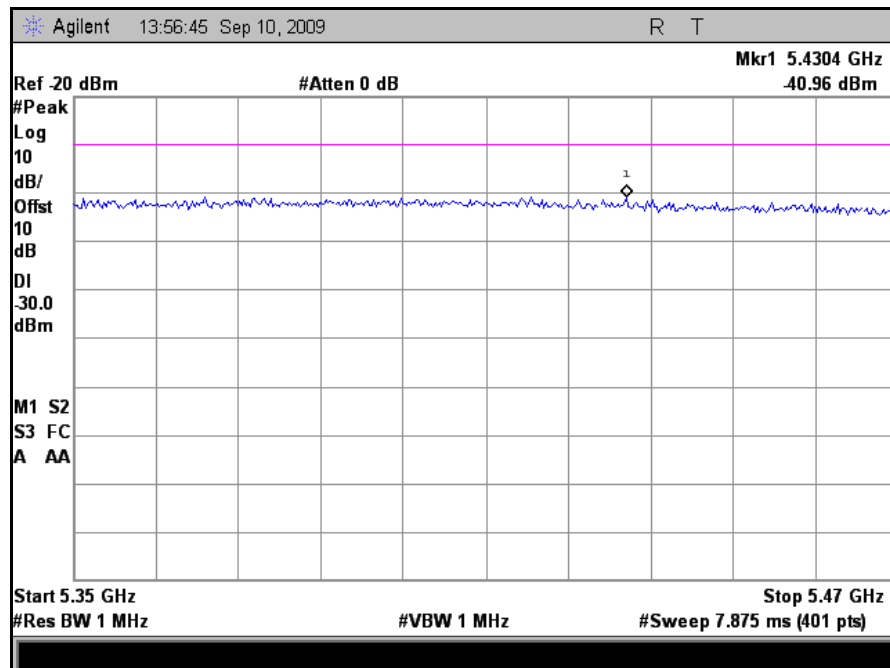

Plot 29. Out of Band Conducted Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 5.35 GHz – 5.47 GHz

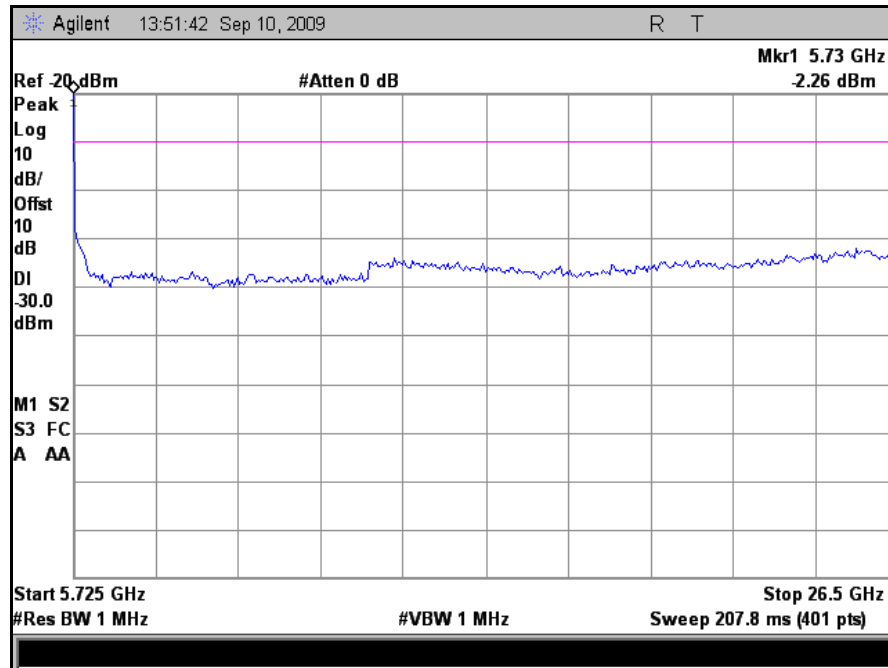

Plot 30. Out of Band Conducted Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 5.725 GHz - 26 GHz

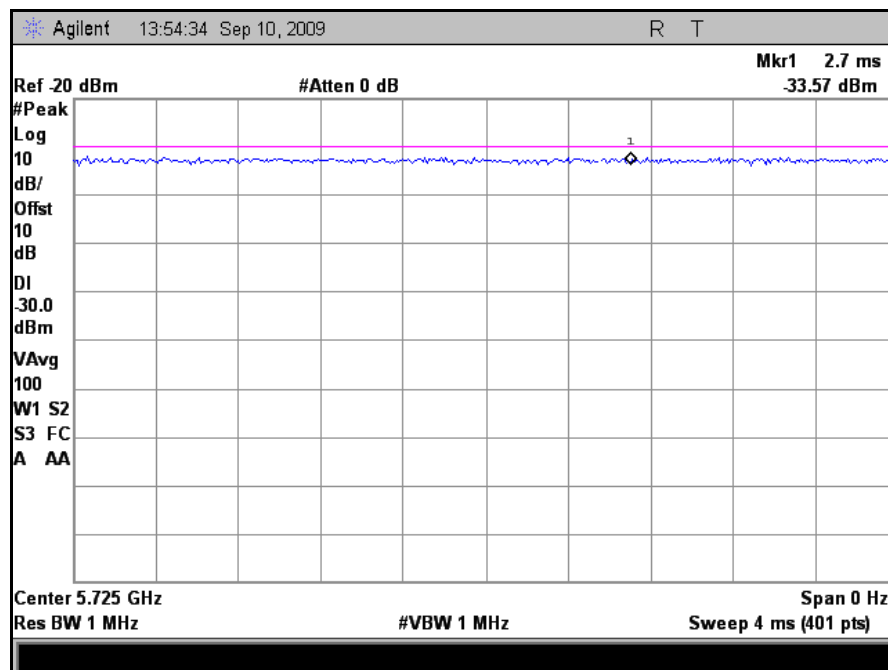

Plot 31. Out of Band Conducted Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, Zero Span at 5725 MHz

4.5.1 Transmitter Unwanted Emissions Outside the 5GHz RLAN Bands (Radiated)

Test Requirement(s): EN 301 893, Clause 5.3.5

4.5.1.1 Definition

These are radiated radio frequency emissions outside the 5GHz RLAN bands when the RF output port is connected to a spectrum analyzer.


4.5.1.2 Limit

The level of unwanted emissions shall not exceed the limits given

Frequency range	Maximum power ERP	Bandwidth
30 MHz to 47 MHz	-36dBm	100KHz
47 MHz to 74 MHz	-54dBm	100KHz
74 MHz to 87,5 MHz	-36dBm	100KHz
87,5 MHz to 118 MHz	-54dBm	100KHz
118 MHz to 174 MHz	-36dBm	100KHz
174 MHz to 230 MHz	-54dBm	100KHz
230 MHz to 470 MHz	-36dBm	100KHz
470 MHz to 862 MHz	-54dBm	100KHz
862 MHz to 1 GHz	-36dBm	100KHz
1 GHz to 5,15 GHz	-30dBm	1MHz
5,35 GHz to 5,47 GHz	-30dBm	1MHz
5,725 GHz to 26,5 GHz	-30dBm	1MHz

Test Procedure:


The EUT was setup as per the specifications set out in Annex B of 301 893 and is shown below.

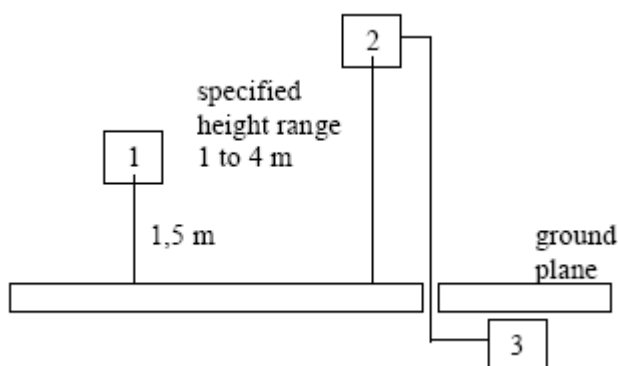

1. Equipment Under Test
2. Test Antenna
3. Spectrum Analyzer

The antenna ports were terminated into a 50Ω load. The receiving antenna was connected directly to a spectrum analyzer through an RF pre-amplifier. The spectrum analyzer were initially set to the peak hold function or video averaging. Emissions were investigated from. If any emission exceeded the limits in the table above then the spectrum analyzer was reset with a resolution of 100KHz, zero span, and the spectrum investigate at 11 frequencies spaced 100KHz in a band $\pm 0.5\text{MHz}$ centered on the failing frequency. The spectrum also was investigated from 1GHz to 5.15GHz, 5.35GHz to 5.47GHz and 5.725GHz to 26.5GHz using a resolution of 1MHz and a peak hold function or video averaging. The turntable was rotated about 360° and the receiving antenna raised and lowered 1-4m in order to determine the maximum emissions. Measurements were carried out in all modulations available. Frequency were at f_c of 5500MHz and 5700MHz for the Higher Sub-band.

The levels of emissions were then determined using a signal substitution method and the setup is shown below.

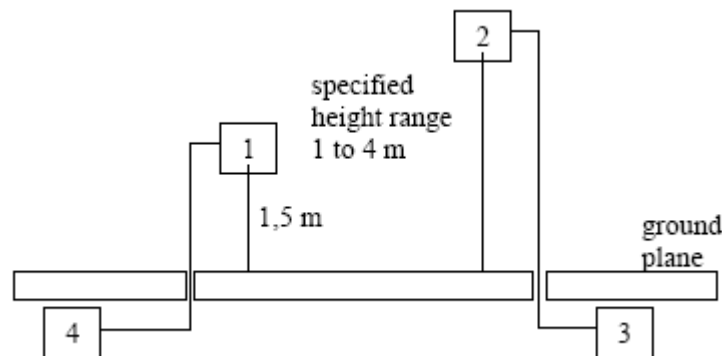


1. Substitution Antenna
2. Test Antenna
3. Spectrum Analyzer
4. Signal Generator

Test Results: The EUT as tested was found compliant with the specified requirements of Clause 5.3.5.


Test Engineer: Anderson Soungpanya

Test Date: 10/05/09


Radiated Spurious Emissions

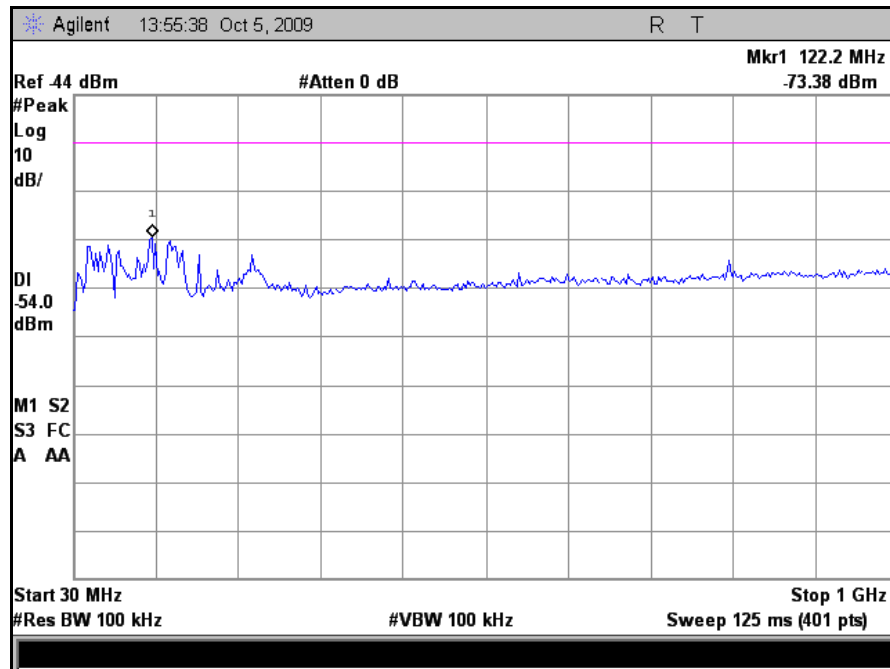


Plot 32. Out of Band Radiated Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 30 MHz – 1 GHz

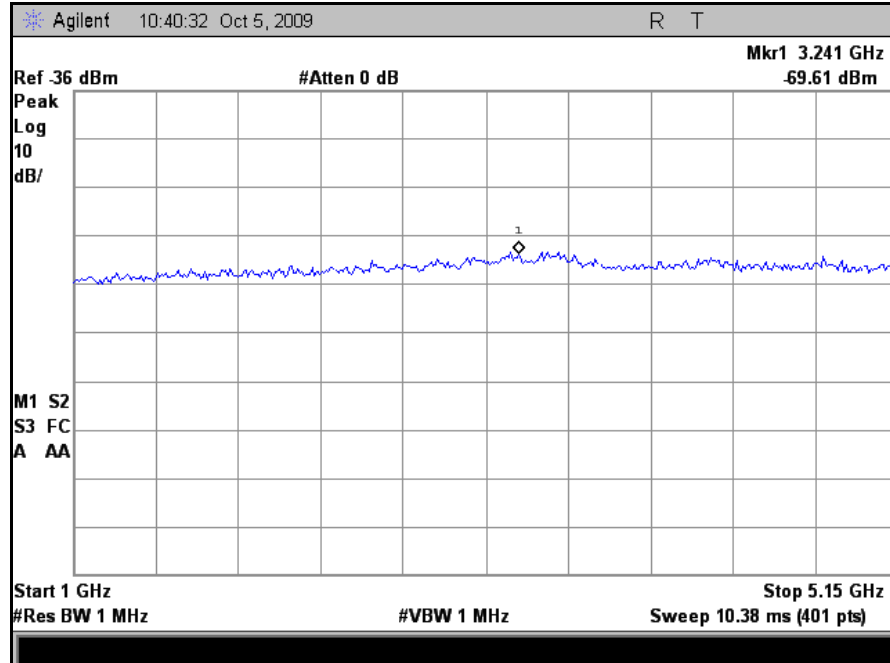


Plot 33. Out of Band Radiated Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 1 GHz – 5.15 GHz

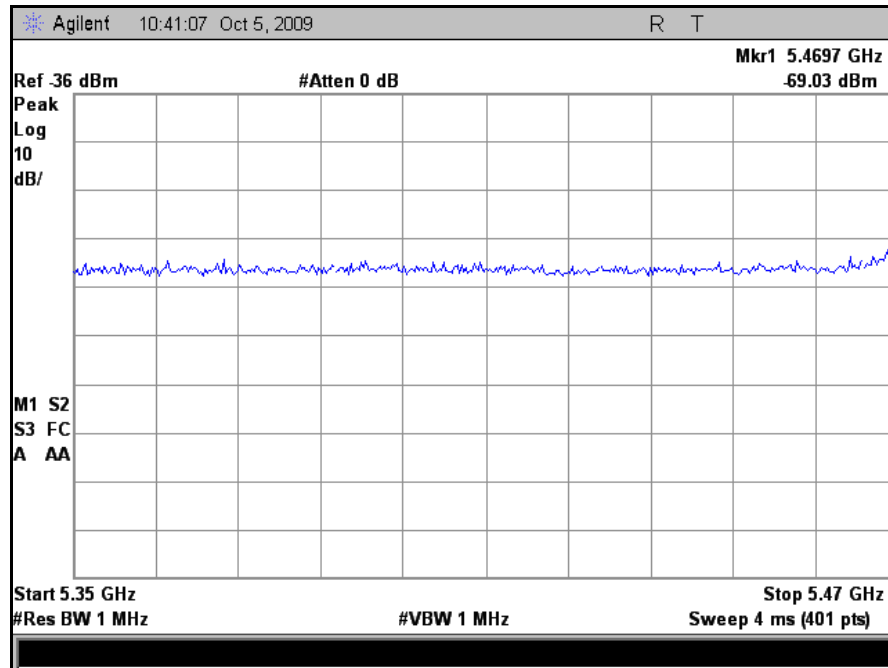


Plot 34. Out of Band Radiated Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 5.35 GHz – 5.47 GHz

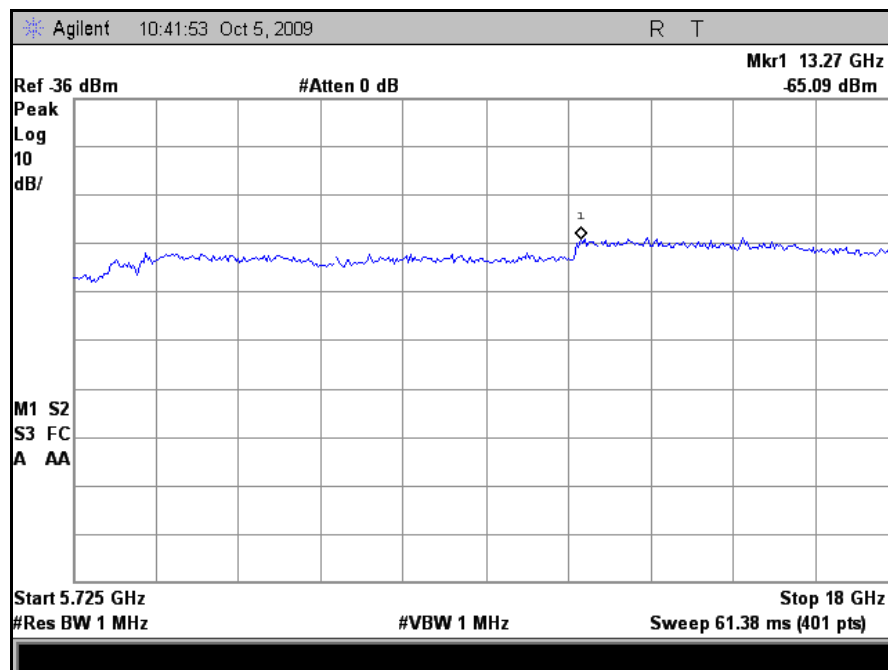


Plot 35. Out of Band Radiated Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 5.725 GHz - 18 GHz

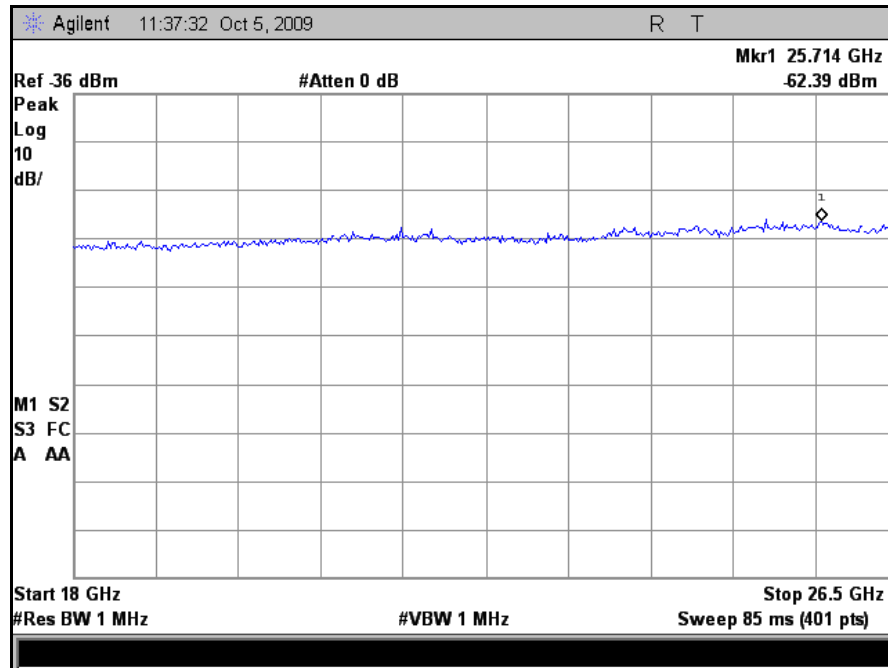


Plot 36. Out of Band Radiated Emissions, 5500 MHz, 802.11n 20MHz Bandwidth, 18 GHz – 26 GHz

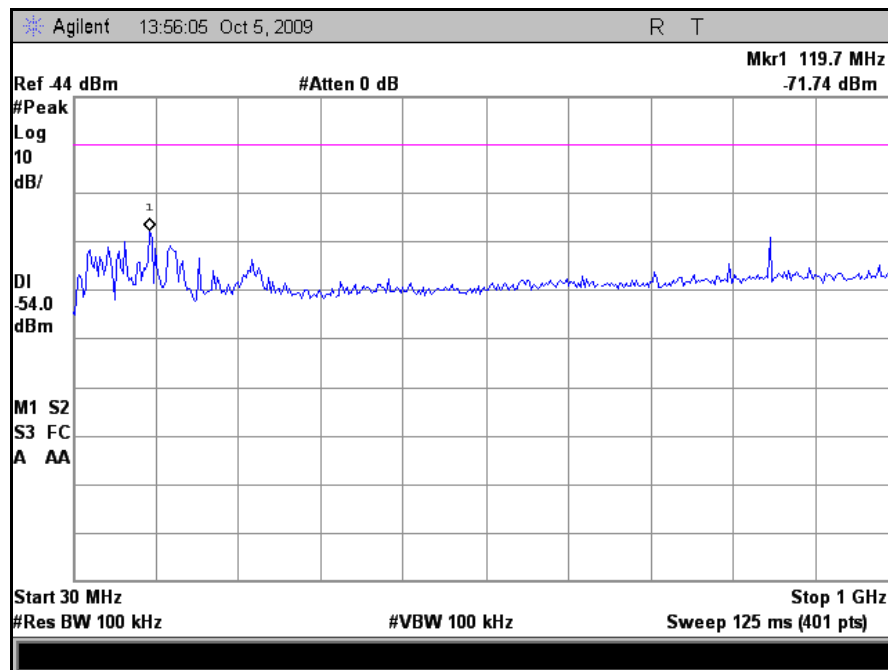


Plot 37. Out of Band Radiated Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 30 MHz – 1 GHz

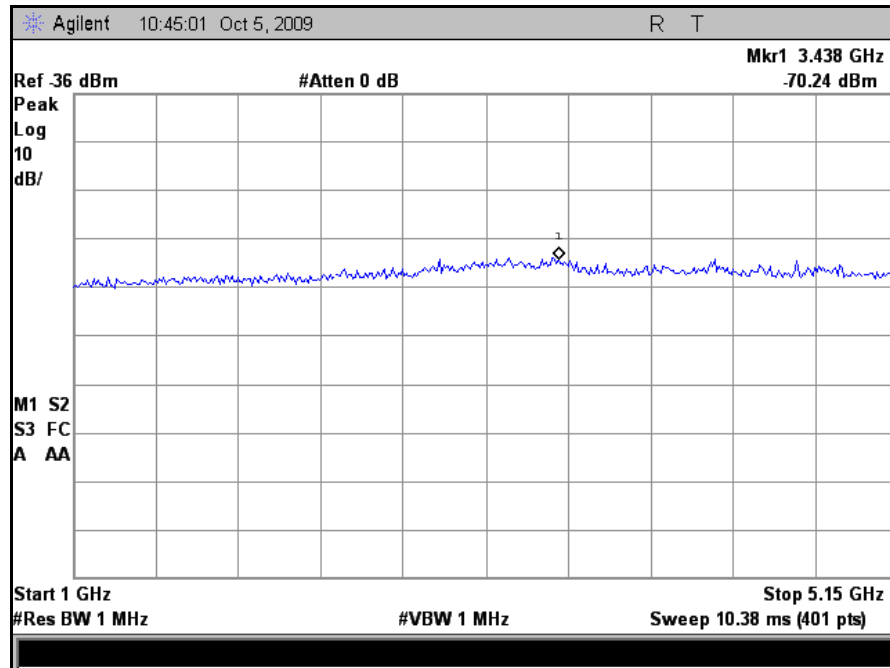


Plot 38. Out of Band Radiated Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 1 GHz – 5.15 GHz

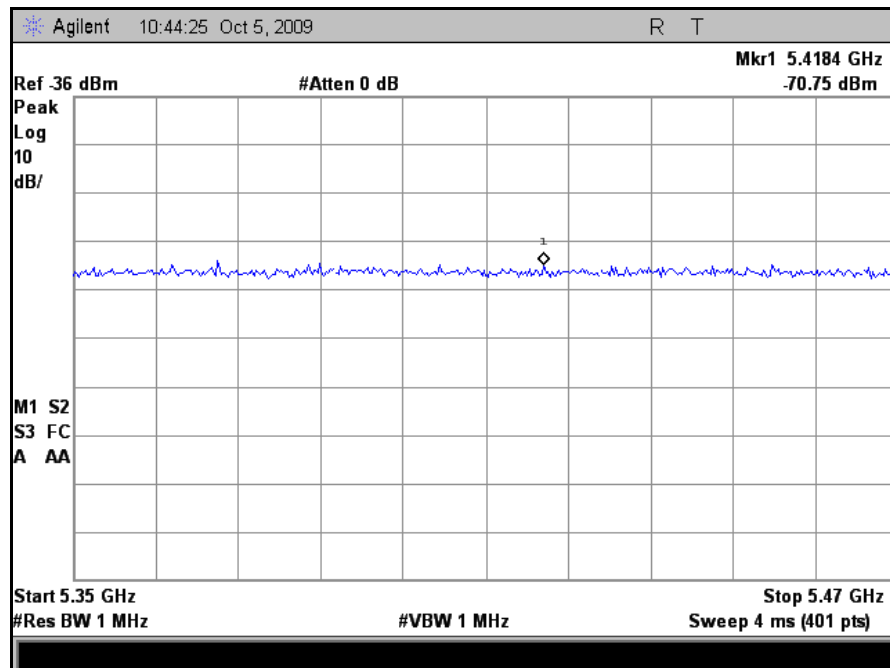


Plot 39. Out of Band Radiated Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 5.35 GHz – 5.47 GHz

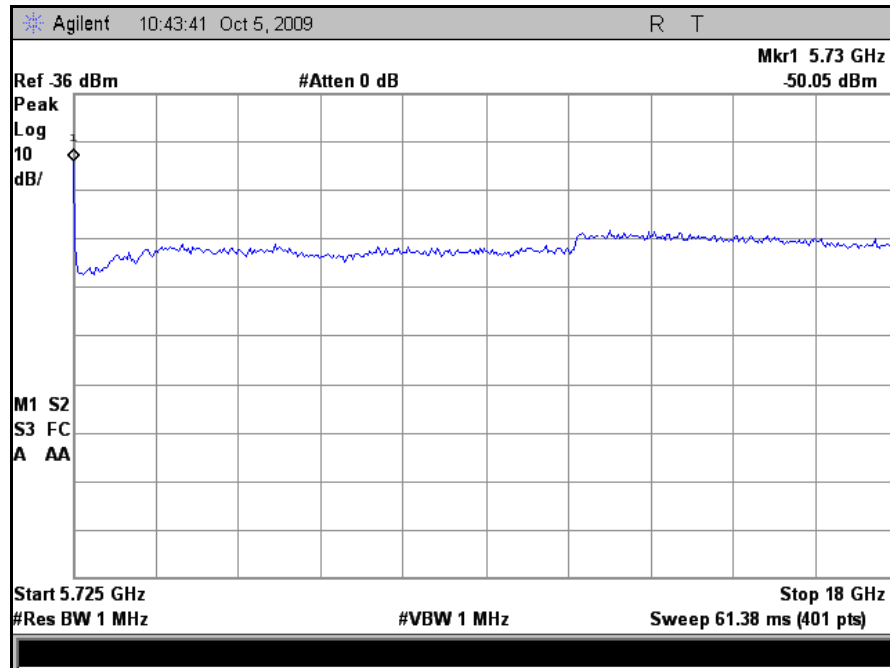


Plot 40. Out of Band Radiated Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 5.725 GHz - 18 GHz

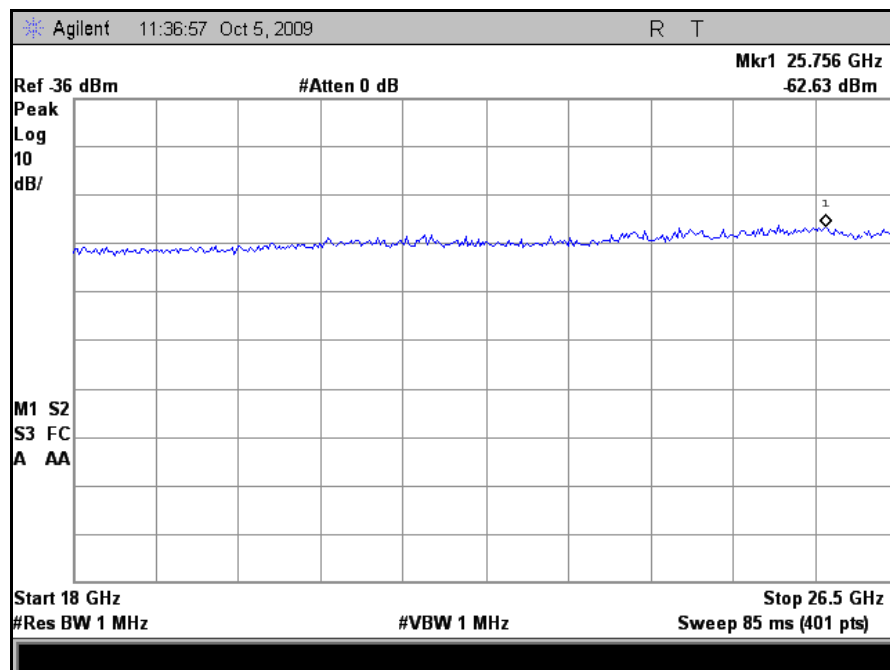


Plot 41. Out of Band Radiated Emissions, 5700 MHz, 802.11n 20MHz Bandwidth, 18 GHz – 26 GHz

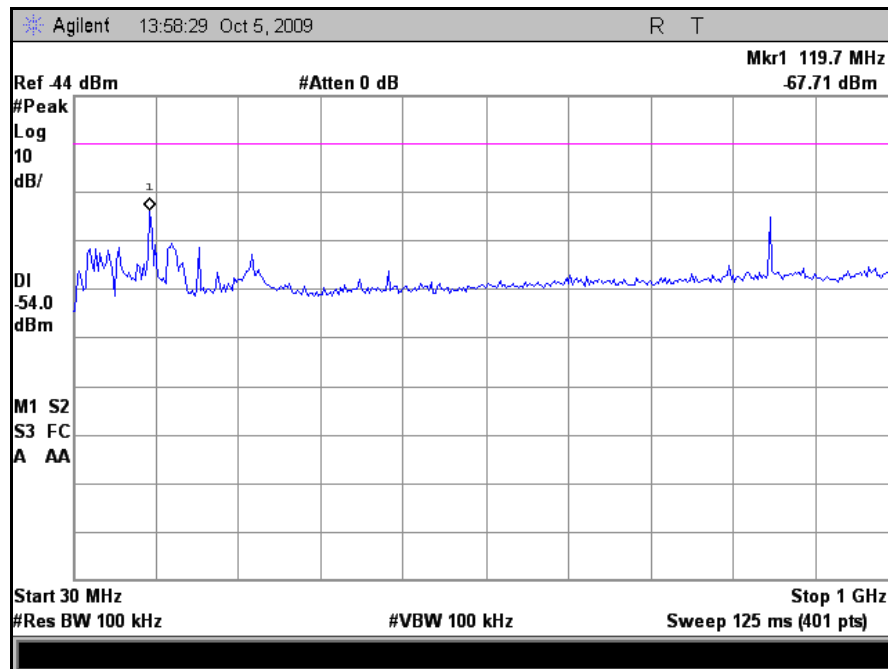


Plot 42. Out of Band Radiated Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 30 MHz – 1 GHz

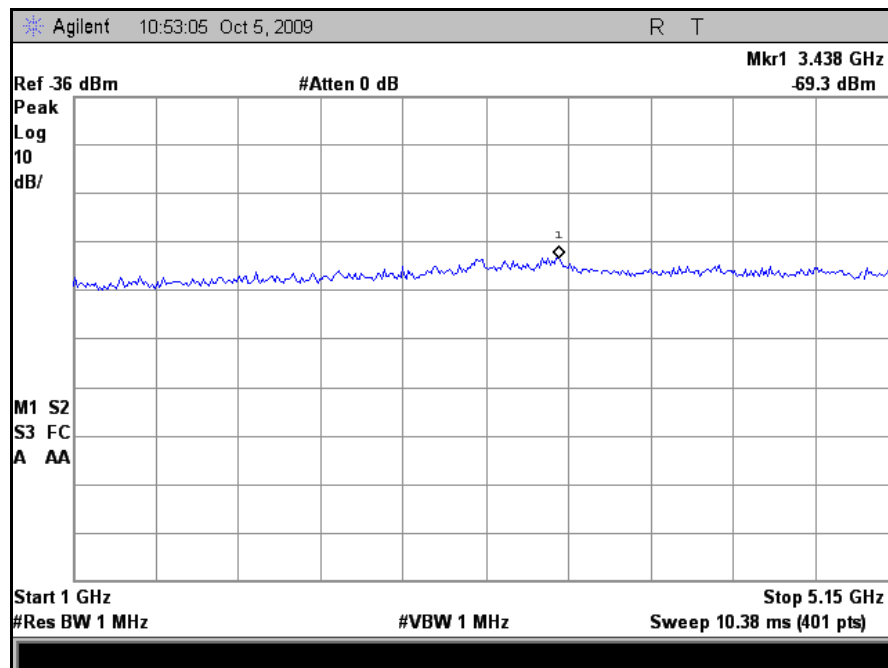


Plot 43. Out of Band Radiated Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 1 GHz – 5.15 GHz

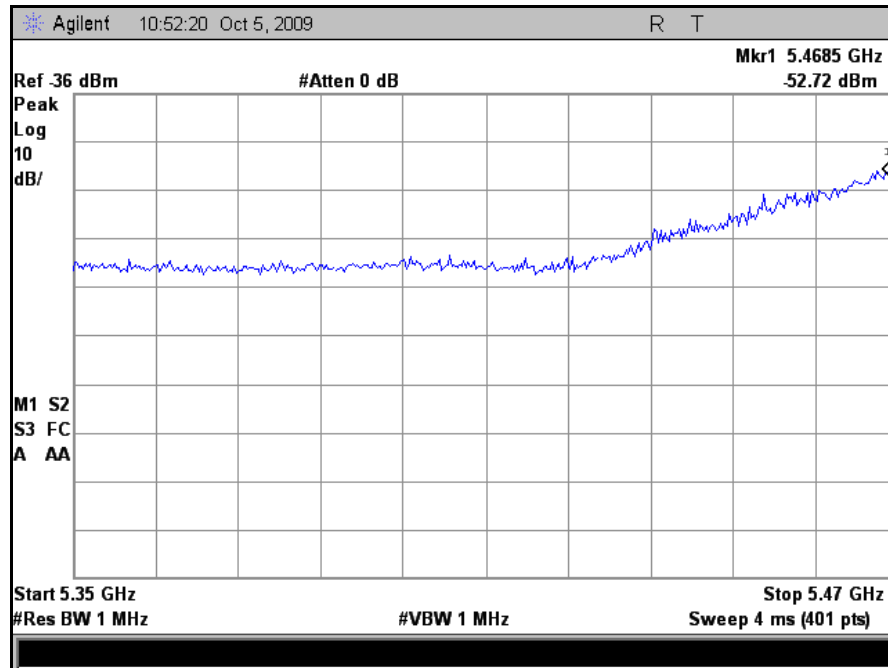


Plot 44. Out of Band Radiated Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 5.35 GHz – 5.47 GHz

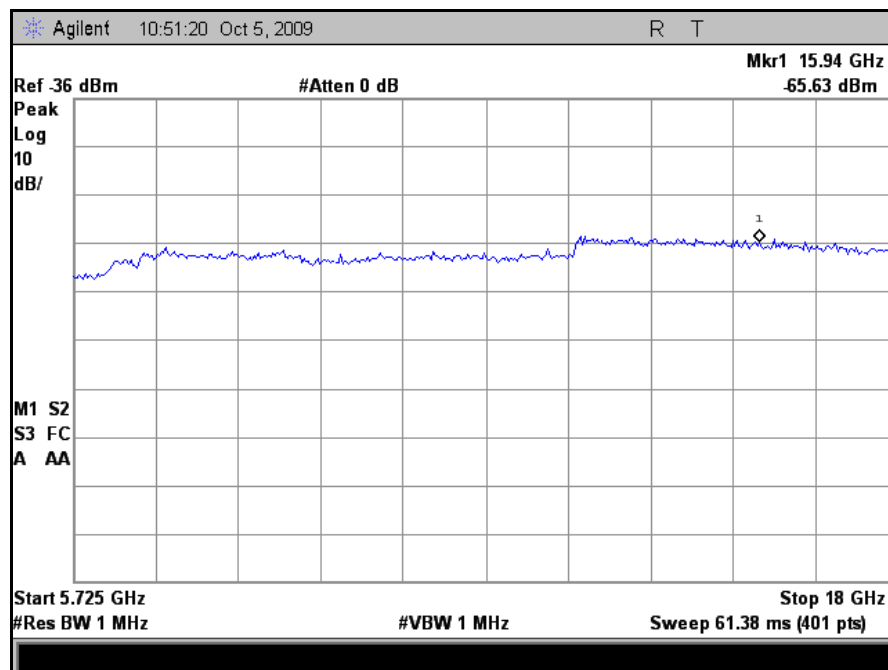


Plot 45. Out of Band Radiated Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 5.725 GHz - 18 GHz

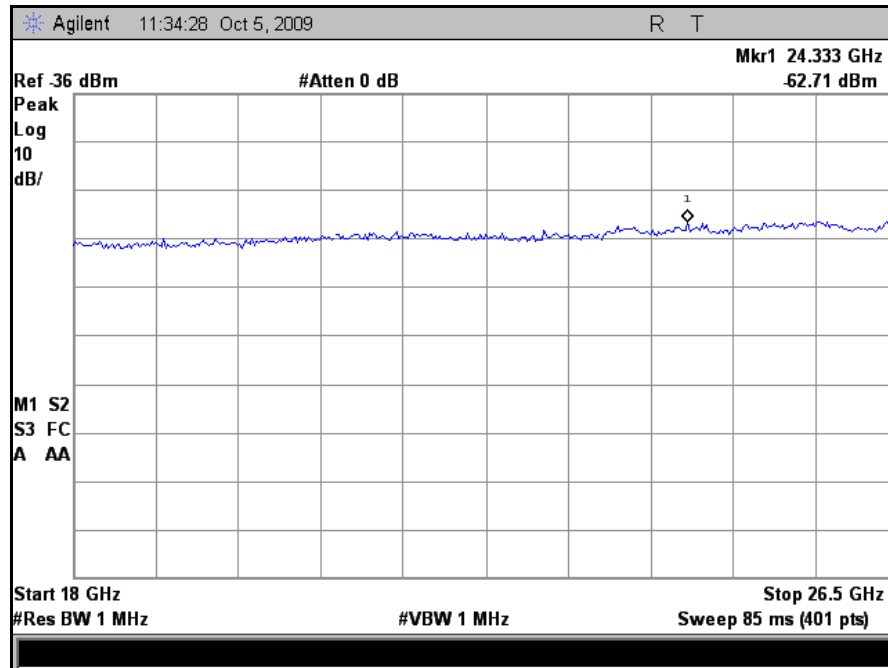


Plot 46. Out of Band Radiated Emissions, 5500 MHz, 802.11n 40MHz Bandwidth, 18 GHz – 26 GHz

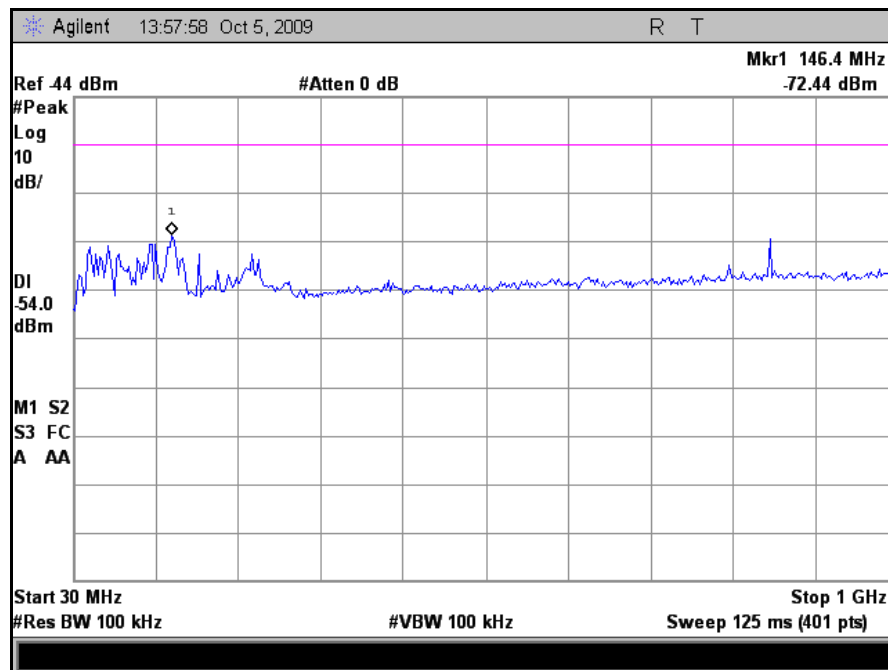


Plot 47. Out of Band Radiated Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 30 MHz – 1 GHz

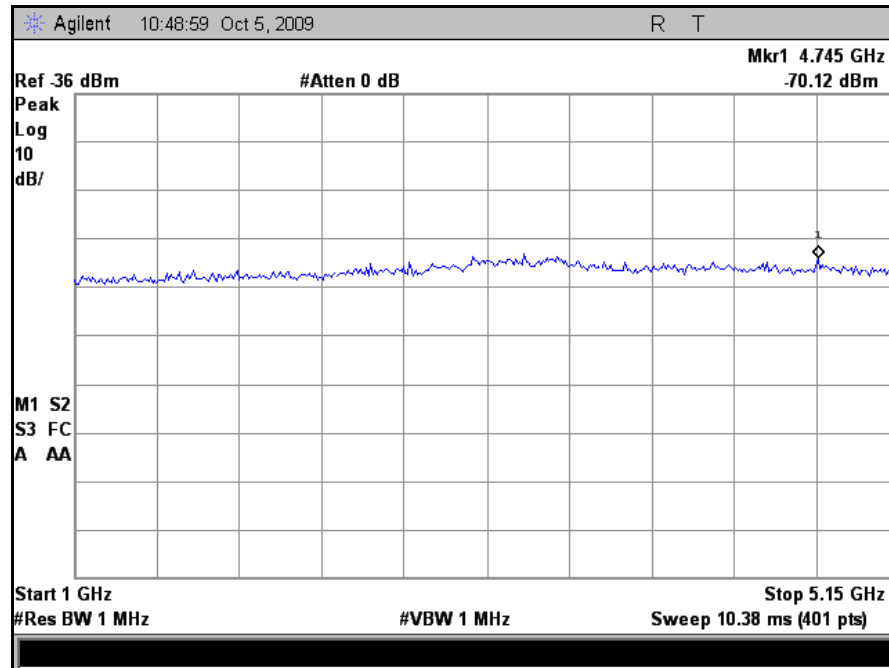


Plot 48. Out of Band Radiated Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 1 GHz – 5.15 GHz

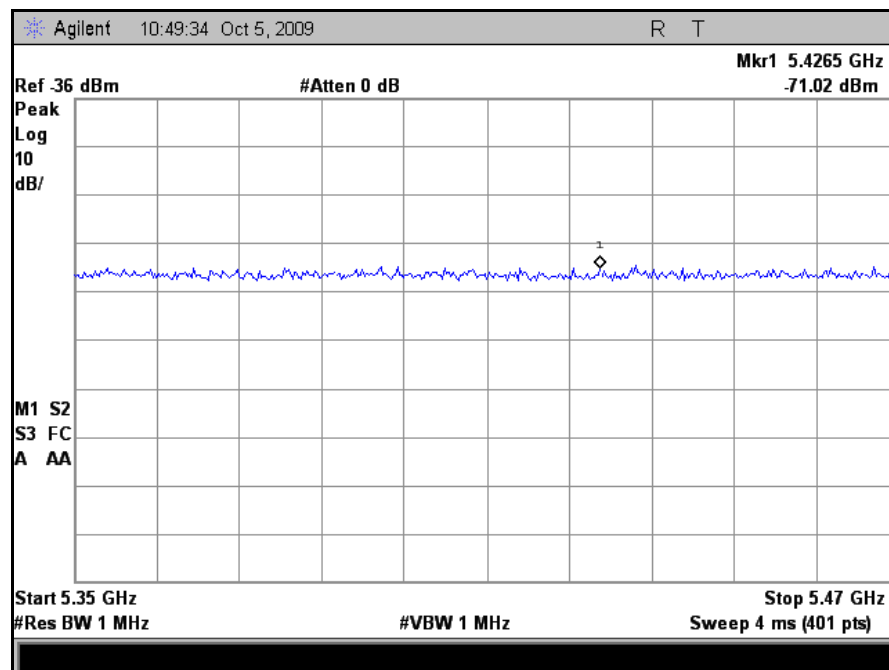

Plot 49. Out of Band Radiated Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 5.35 GHz – 5.47 GHz

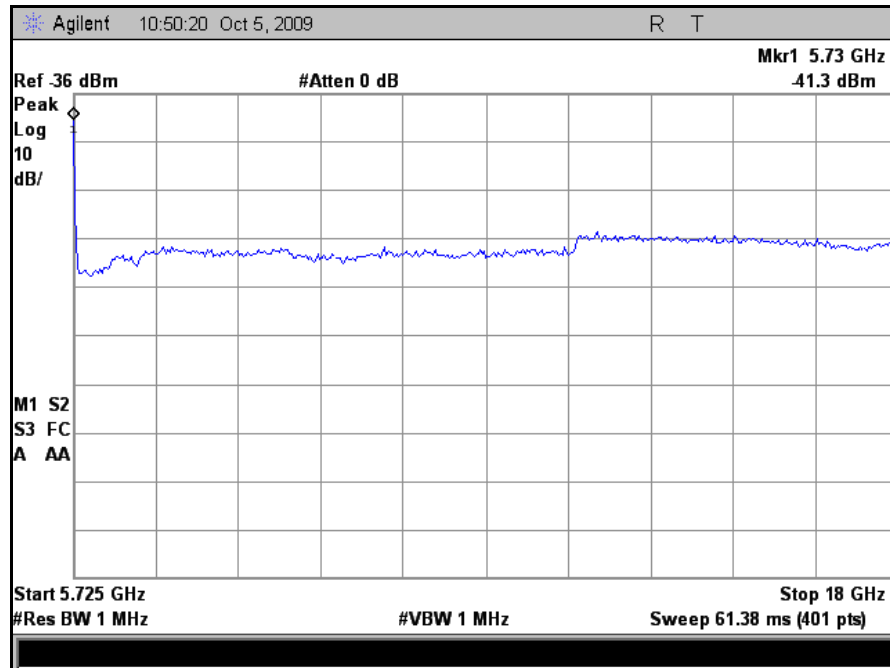


Plot 50. Out of Band Radiated Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 5.725 GHz - 18 GHz

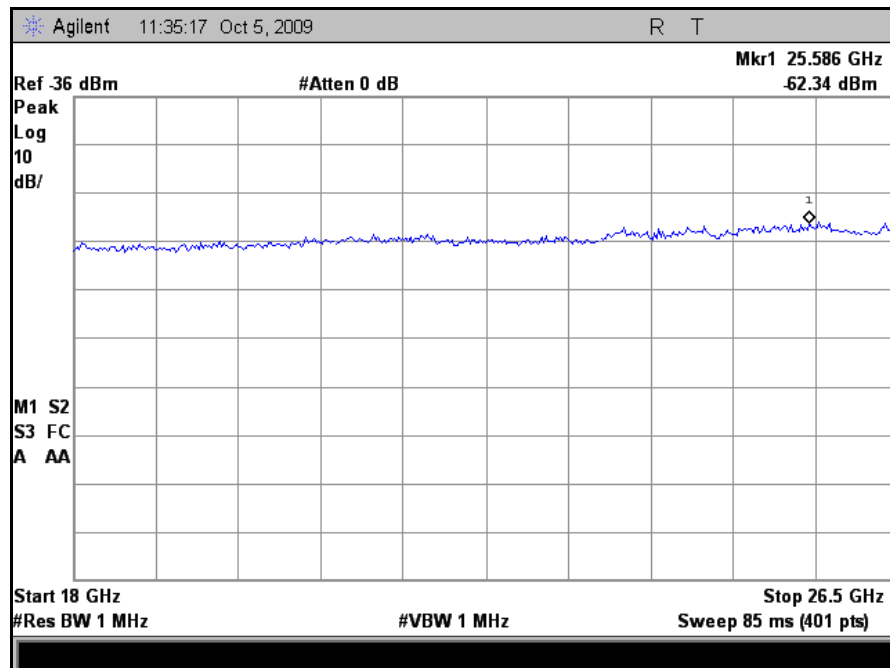


Plot 51. Out of Band Radiated Emissions, 5700 MHz, 802.11n 40MHz Bandwidth, 18 GHz – 26 GHz


Radiated Emissions Test Setup Photographs

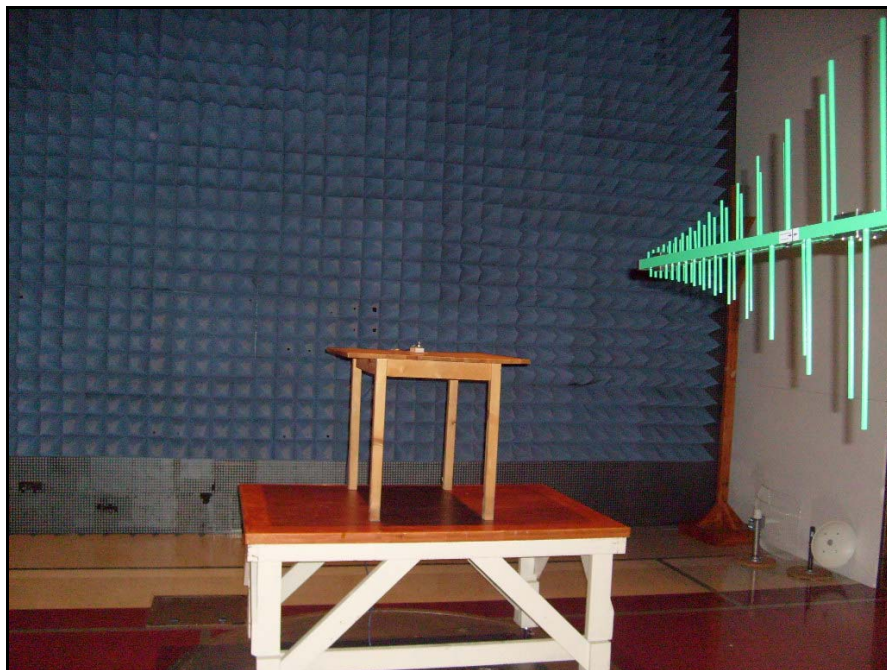

Photograph 1. Radiated Emissions Setup, 30 MHz – 1 GHz, Bilog

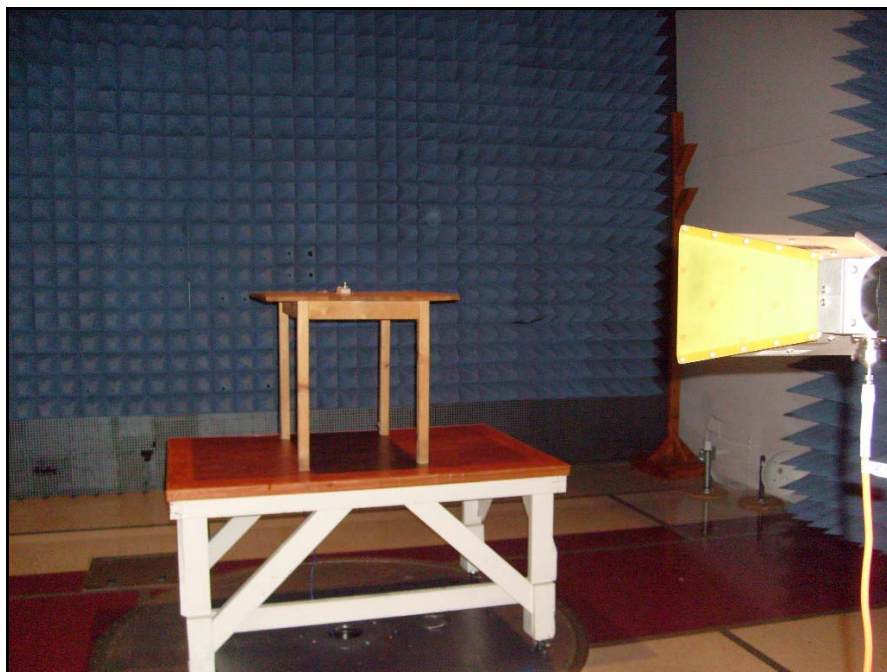

Photograph 2. Radiated Emissions Setup, 1 GHz – 18 GHz, Horn

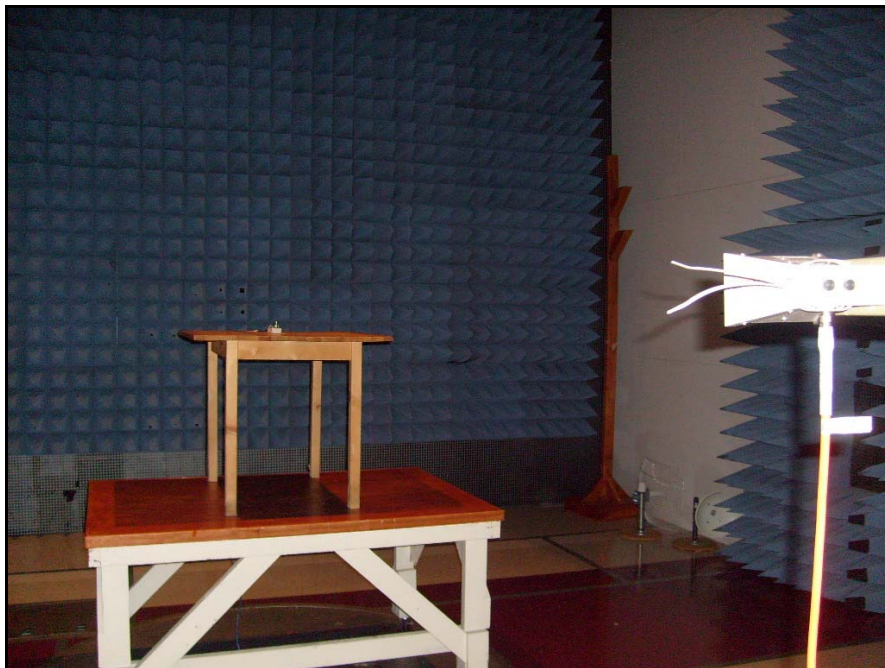

Photograph 3. Radiated Emissions Setup, 18 GHz – 26 GHz, Horn

4.5.2 Transmitter Unwanted Emissions Within the 5GHz RLAN Bands (Conducted)


Test Requirement(s): EN 301 893, Clause 5.3.6:

4.5.2.1 Definition

These are conducted radio frequency emissions within the 5GHz RLAN bands when the RF output port is connected to a spectrum analyzer.

4.5.2.2 Limit

The average level of the transmitted spectrum within the 5GHz RLAN bands shall not exceed the limits given below.

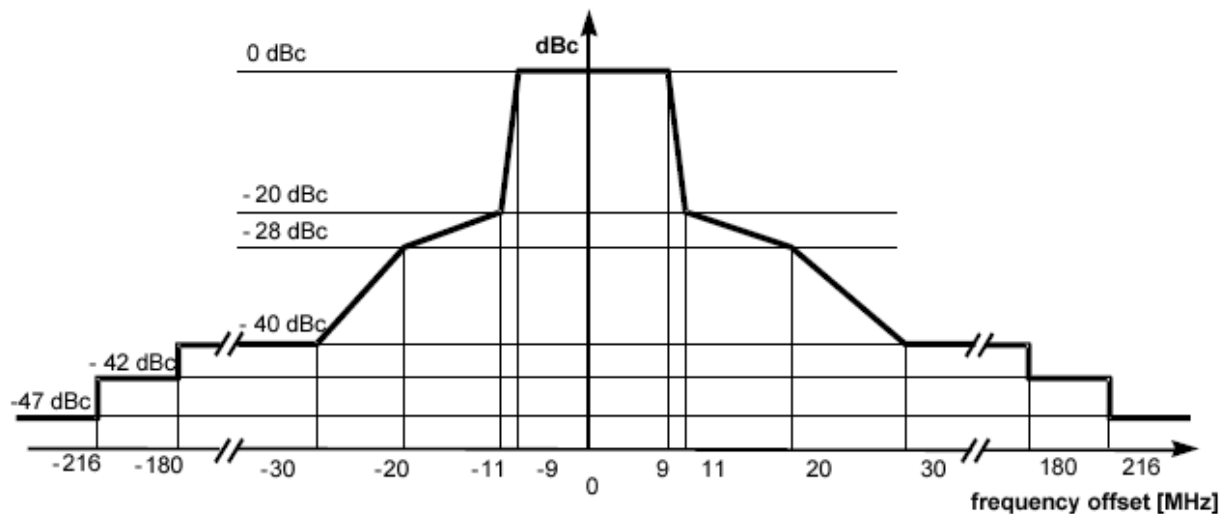

Note: dBc is the spectral density relative to the maximum spectral power density of the transmitted signal.

Test Procedure: The maximum spectral power density of the EUT's transmitted signal was determined using a broadband power meter capable of measuring the average power of a modulated carrier. The EUT was then connected to a spectrum analyzer with a RBW of 1MHz, a VBW of 30 KHz and with video averaging on. The level of the power density measured previously was then used to set the emission mask relative to the 0 dB reference level of the modulated carrier. Measurements were carried out in all modulations available. Frequency was at f_c of 5500MHz and 5700MHz for the Higher Sub-band. The spectrum under the mask was examined both in a relatively narrow span and a broader span in order to determine compliance.

In case of conducted measurements on smart antenna systems (devices with multiple transmit chains) measurements need only to be performed on one of the active transmit chains (antenna outputs).

Test Results: The EUT as tested was found compliant with the specified requirements of Clause 5.3.6.

Test Engineer: Anderson Soungpanya

Test Date: 10/05/09






Figure 6. Unwanted Conducted Emissions Within Test Setup


Transmitter Unwanted Emissions Within the 5GHz RLAN Bands (Conducted)

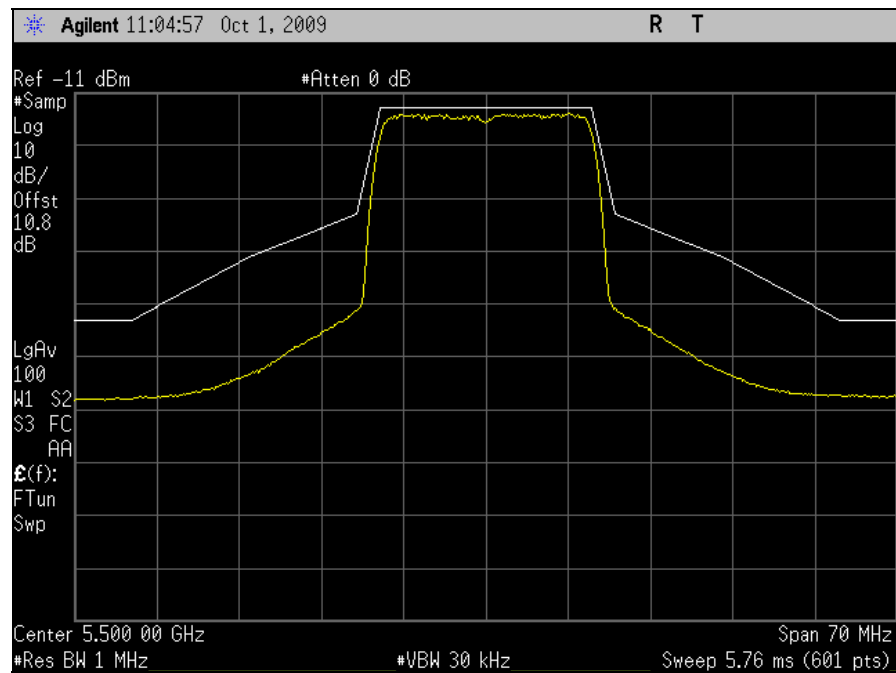


Plot 52. Inband Conducted Spurious, 5500 MHz, 802.11n 20MHz Bandwidth, 70 MHz Span

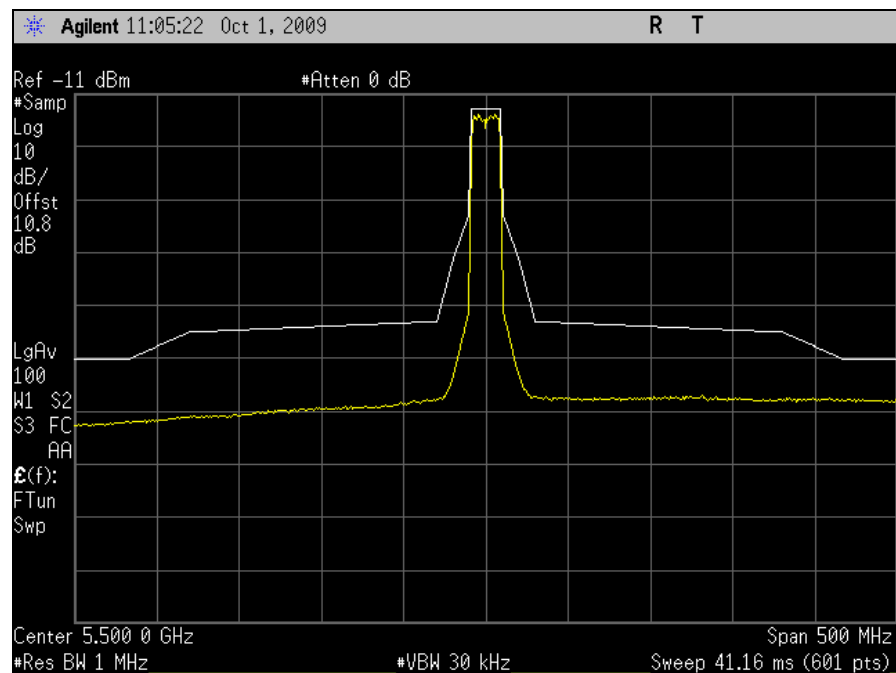


Plot 53. Inband Conducted Spurious, 5500 MHz, 802.11n 20MHz Bandwidth, 500 MHz Span

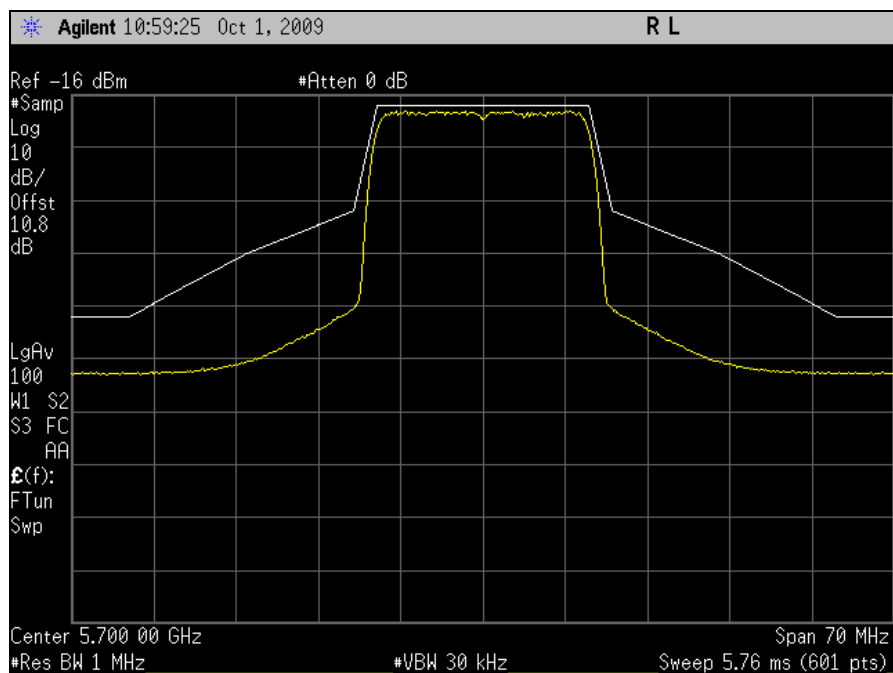


Plot 54. Inband Conducted Spurious, 5700 MHz, 802.11n 20MHz Bandwidth, 70 MHz Span

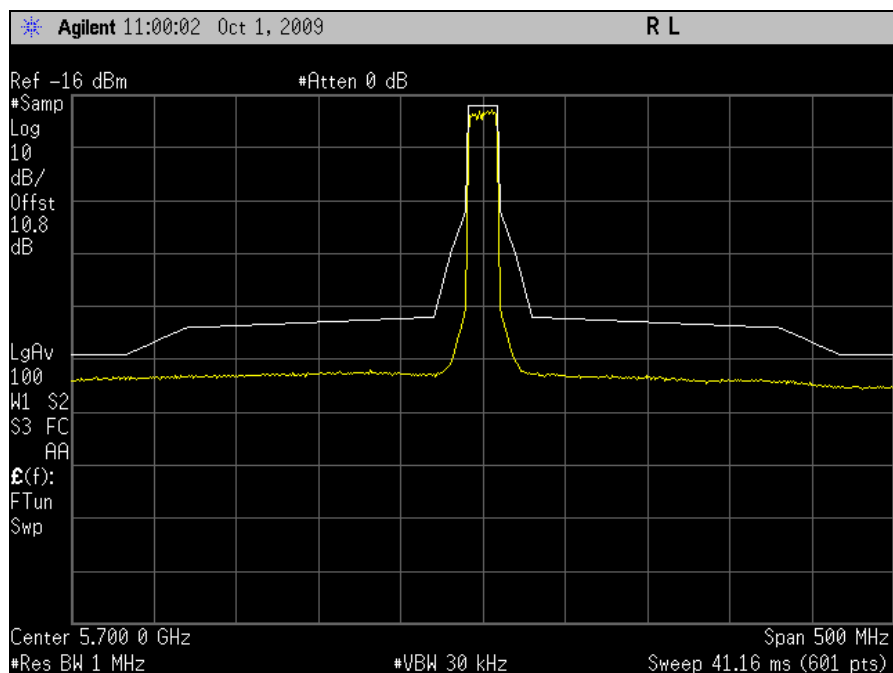


Plot 55. Inband Conducted Spurious, 5700 MHz, 802.11n 20MHz Bandwidth, 500 MHz Span

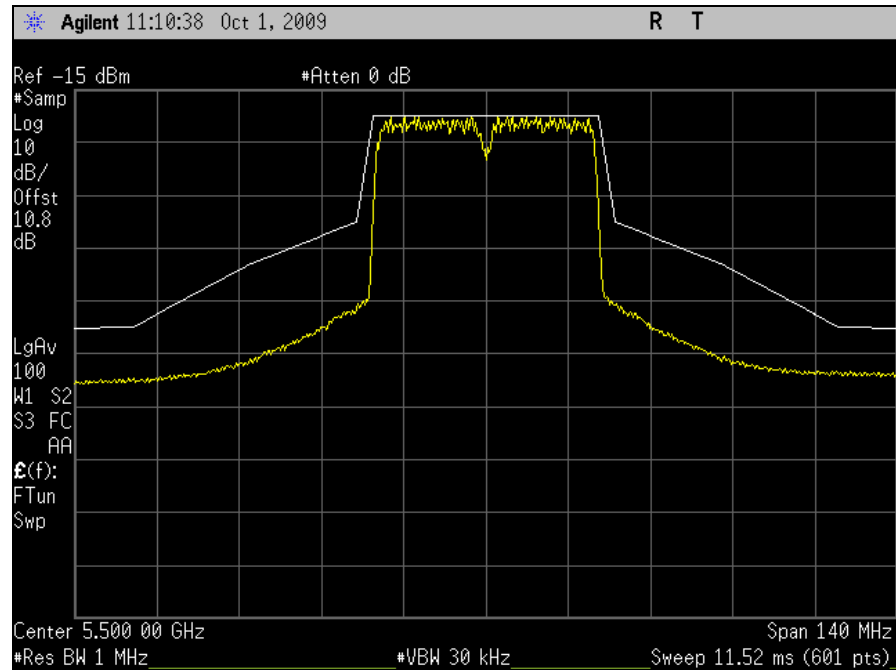


Plot 56. Inband Conducted Spurious, 5500 MHz, 802.11n 40MHz Bandwidth, 140 MHz Span

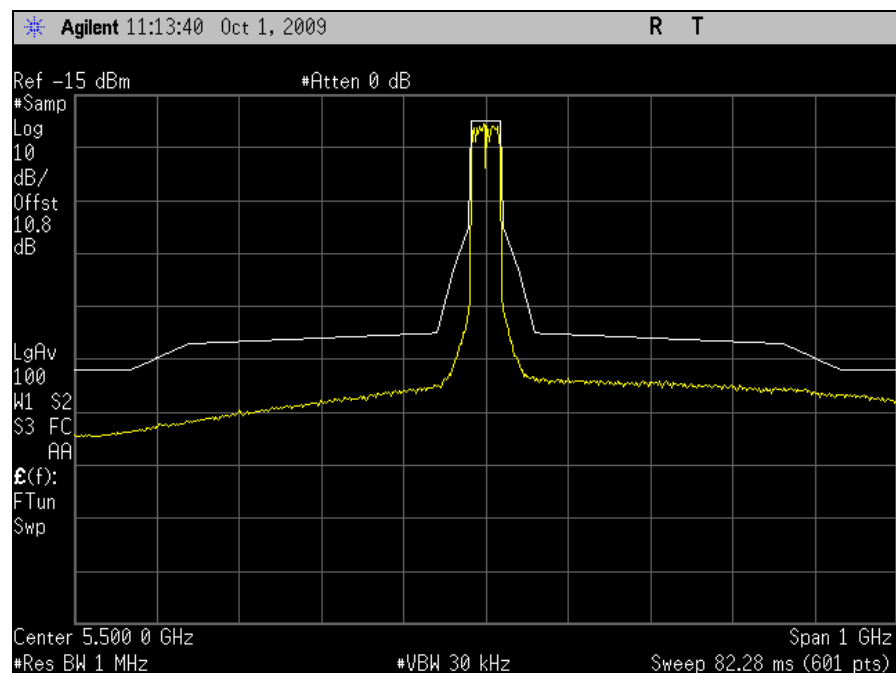

Plot 57. Inband Conducted Spurious, 5500 MHz, 802.11n 40MHz Bandwidth, 1 GHz Span

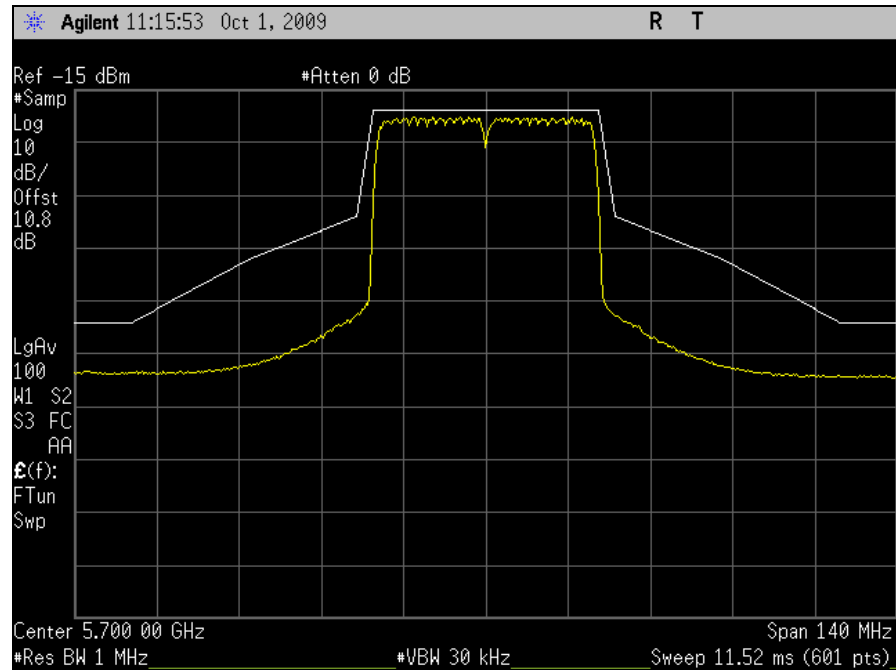

Plot 58. Inband Conducted Spurious, 5700 MHz, 802.11n 40MHz Bandwidth, 140 MHz Span

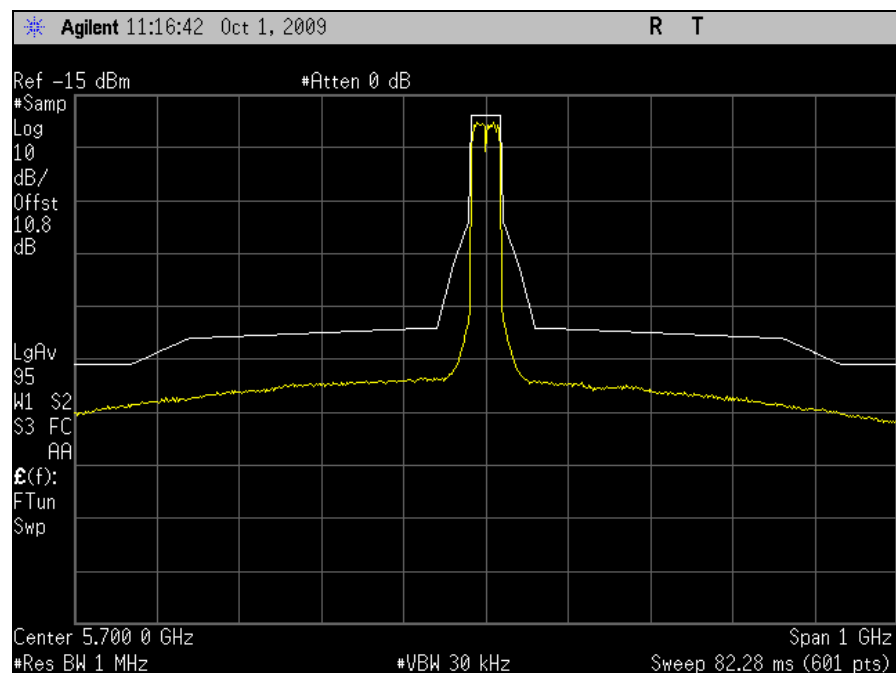

Plot 59. Inband Conducted Spurious, 5700 MHz, 802.11n 40MHz Bandwidth, 1 GHz Span

4.5.2 Transmitter Unwanted Emissions Within the 5GHz RLAN Bands (Radiated)

Test Requirement(s): EN 301 893, Clause 3.5.6:

4.5.2.1 Definition

These are radiated radio frequency emissions within the 5GHz RLAN bands from the cabinet or structure when the EUT is in receive mode.

4.5.2.2 Limit

Frequency Range	Maximum Power, ERP	Measurement Bandwidth
5.470GHz to 5.725GHz	-47 dBm	1MHz

Test Procedure: The EUT was setup as per section 4.4 above for measuring out of band radiated emissions. The spectrum within the 5GHz RLAN band was investigated for spurious emissions. Measurements were carried out in all modulations available. Frequency was at f_c of 5500MHz and 5700MHz for the Higher Sub-band.


In case of measurements on smart antenna systems (devices with multiple transmit chains) measurements need only to be performed on one of the active transmit chains (antenna outputs).

Test Results: The EUT as tested was found compliant with the specified requirements of Clause 5.3.6.


Test Engineer: Anderson Soungpanya

Test Date: 10/05/09


Transmitter Unwanted Emissions Within the 5GHz RLAN Bands (Radiated)

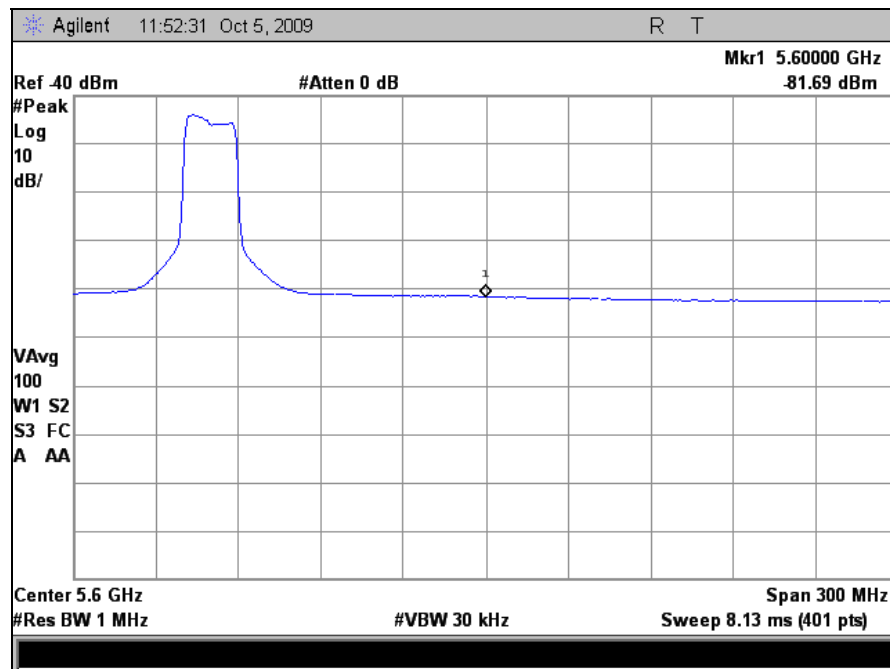


Plot 60. Inband Radiated Spurious, 5500 MHz, 802.11n 20MHz Bandwidth

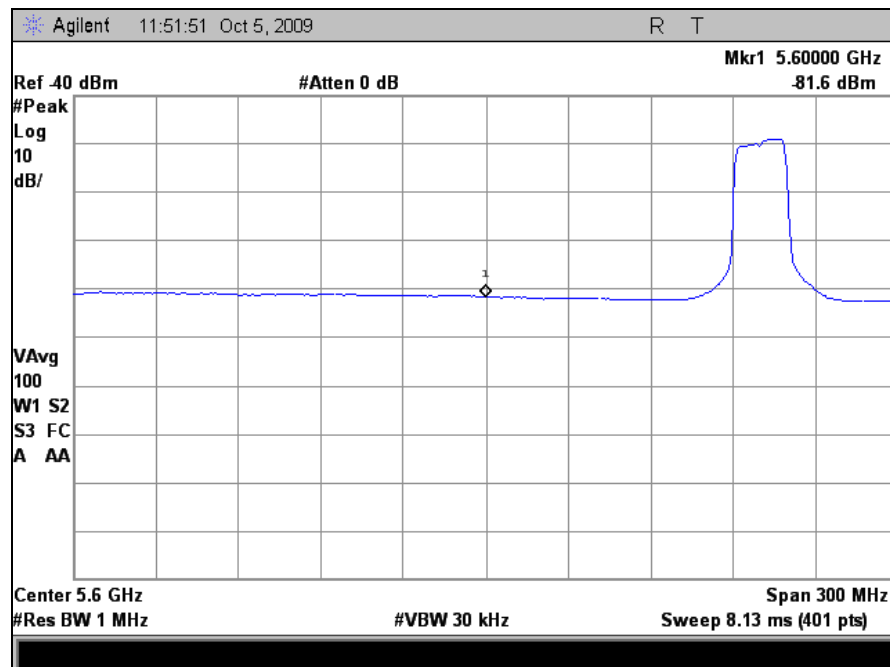

Plot 61. Inband Radiated Spurious, 5700 MHz, 802.11n 20MHz Bandwidth

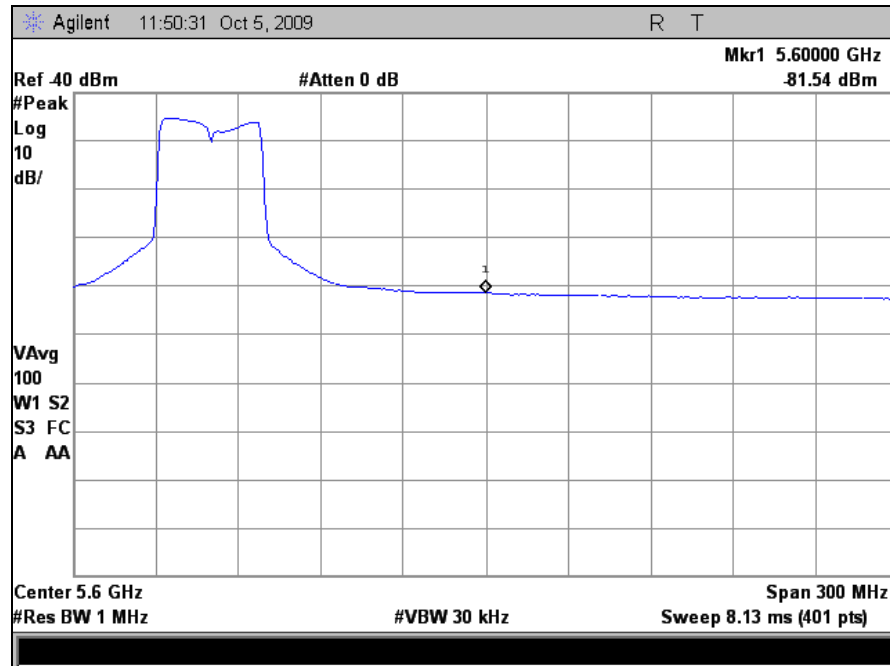

Plot 62. Inband Radiated Spurious, 5500 MHz, 802.11n 40MHz Bandwidth

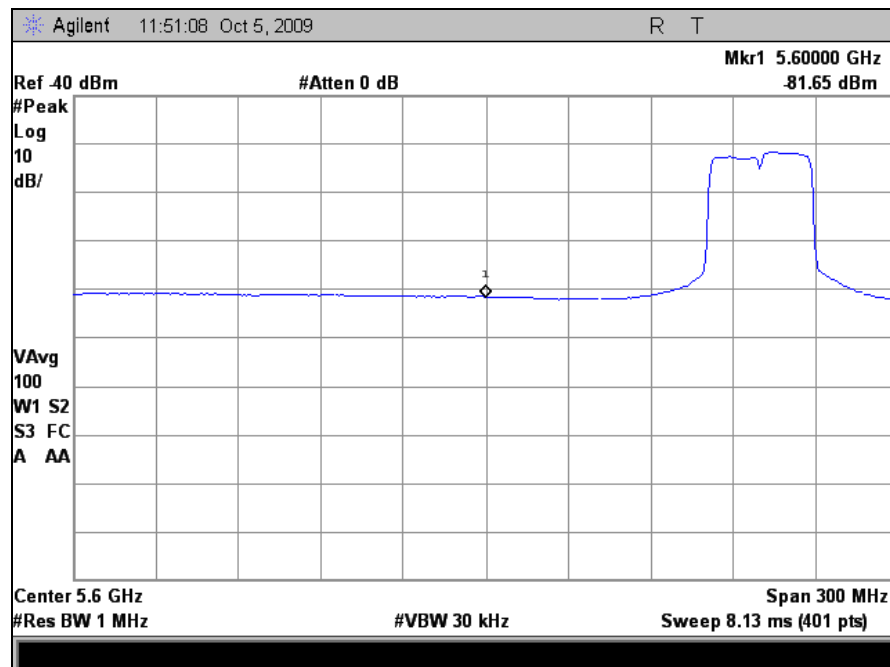

Plot 63. Inband Radiated Spurious, 5700 MHz, 802.11n 40MHz Bandwidth

4.6 Receiver Spurious Emissions (Conducted)

Test Requirement(s): EN 301 893V1.4.1, Clause 5.3.7:

4.6.1 Definition

Receiver spurious emissions are emissions at any frequency when the equipment is in received mode.

4.6.2 Limit

The spurious emissions of the receiver shall not exceed the values in table below.

Frequency Range	Maximum Power, ERP	Measurement Bandwidth
30 MHz to 1 GHz	-57 dBm	100KHz
above 1 GHz to 26.5 GHz	-47 dBm	1MHz

Test Procedure: Two EUTs were setup to communicate with each other. A test transmission sequence as shown below was used to send data between the two units. A directional coupler was used to isolate the emission measurements from the test data signal while the EUT received test data. The spectrum analyzer was initially set with a RBW of 1MHz or 100KHz and a VBW of 1MHZ using video averaging or peak hold. The Frequency was scanned from 30MHz to 26.5GHz.

Test Results: The EUT as tested was found compliant with the specified limits of Clause 5.3.7.

Test Engineer: Anderson Soungpanya

Test Date: 09/10/09






Figure 7. Receiver Spurious Emissions Test Setup

Receiver Spurious Emissions (Conducted)

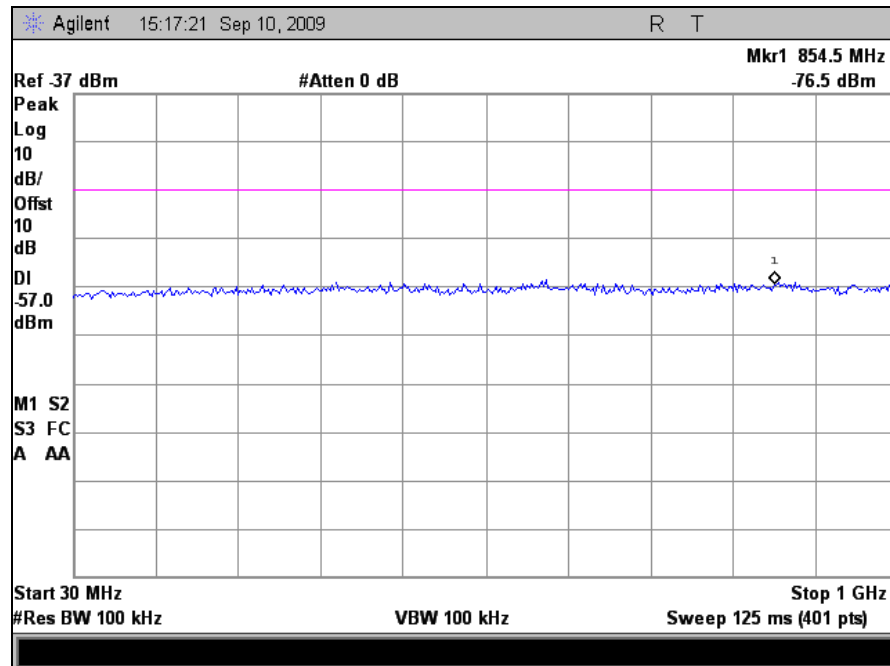

Plot 64. Conducted Receiver Spurious Emission, 30 MHz – 1 GHz

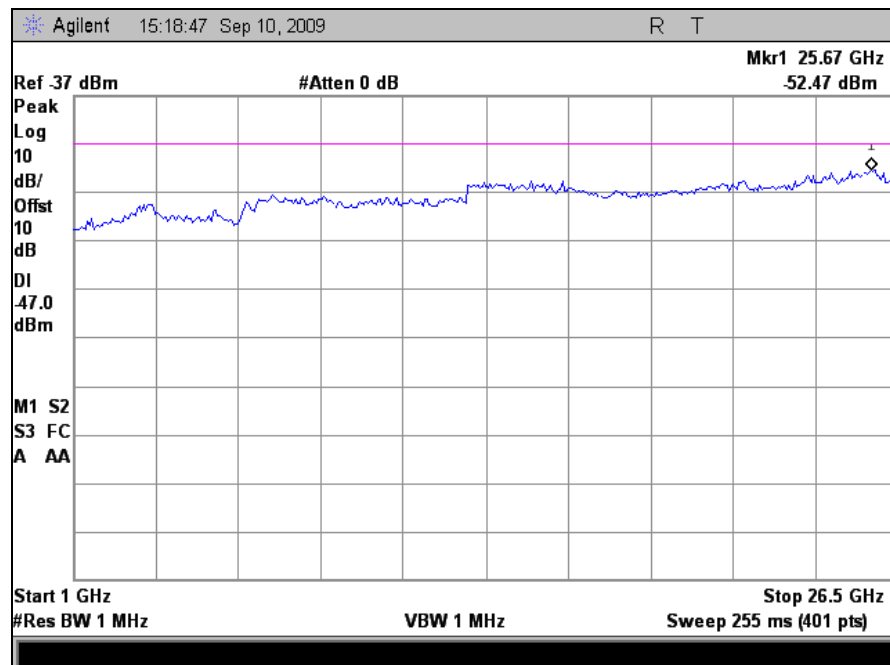

Plot 65. Conducted Receiver Spurious Emission, 1GHz – 26.5 GHz

4.6 Receiver Spurious Emissions (Radiated)

Test Requirement(s): EN 301 893V1.4.1, Clause 5.3.7

4.6.1 Definition

Receiver spurious emissions are emissions at any frequency when the equipment is in received mode.

4.6.2 Limit

The spurious emissions of the receiver shall not exceed the values in table below.

Frequency Range	Maximum Power, ERP	Measurement Bandwidth
30 MHz to 1 GHz	-57 dBm	100KHz
above 1 GHz to 26.5 GHz	-47 dBm	1MHz

Test Procedure: The EUT was setup as per section 4.4 above for measuring out of band radiated emissions. The EUT was set up to receive data. The spectrum within the 5GHz RLAN band was investigated for spurious emissions.

Test Results: The EUT as tested was found compliant with the specified limits of Clause 5.3.7.

Test Engineer: Anderson Soungpanya

Test Date: 09/10/09






Figure 8. Receiver Spurious Emissions Test Setup


Receiver Spurious Emissions (Radiated)

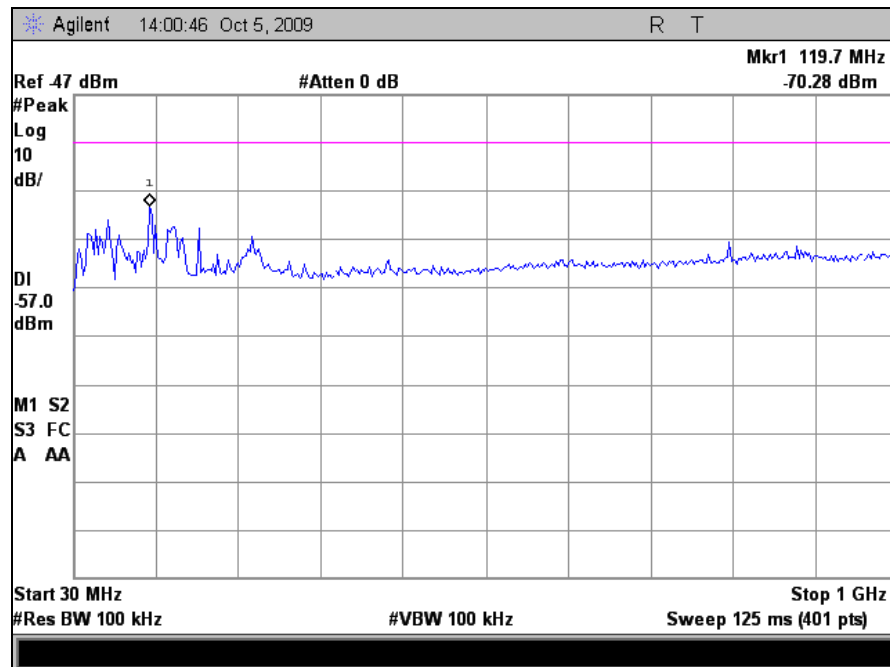

Plot 66 Radiated Receiver Spurious Emission, 30 MHz - 1 GHz

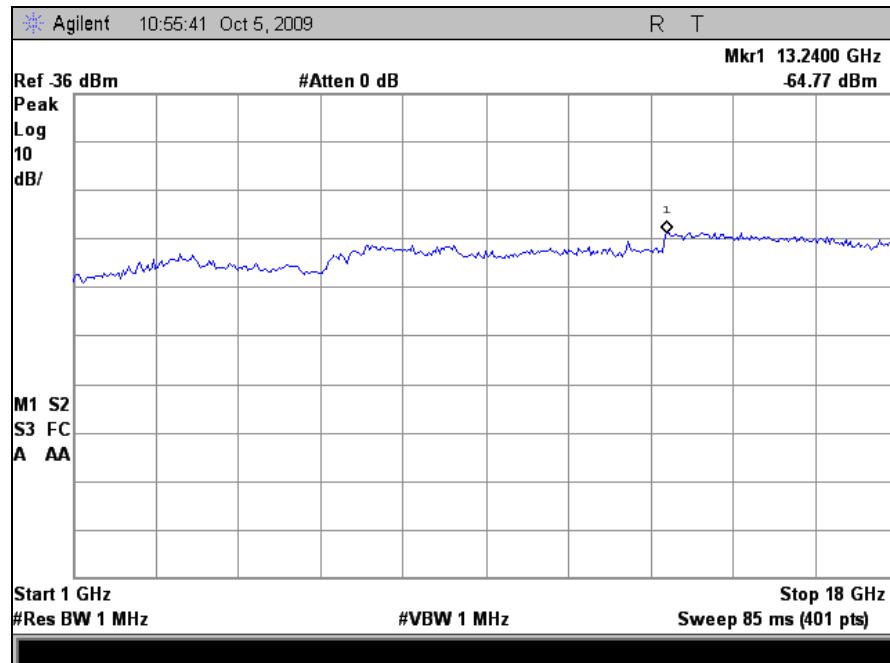

Plot 67. Radiated Receiver Spurious Emission, 1 GHz - 18 GHz

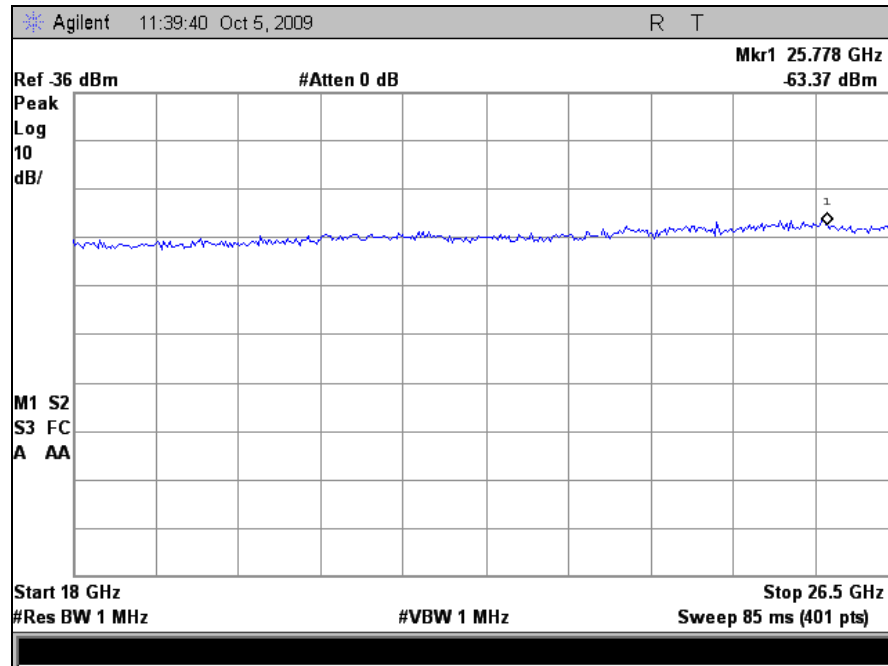

Plot 68. Radiated Receiver Spurious Emission, 18 GHz – 26.5 GHz

4.8 Medium Access Protocol

Test Requirement(s): EN 301 893, Section 4.8

4.8.1 Definition

A medium access protocol is a mechanism designed to facilitate spectrum sharing with other devices in the wireless network.

4.8.2 Requirement

A medium access protocol shall be implemented by the equipment and shall be active under all circumstances.

Test Results: The EUT as tested was found compliant with the specified limits.

Test Engineer: Anderson Soungpanya

Test Date: 09/10/09

Conformance Requirements

4.9 User Access Restrictions

Test Requirement(s): EN 301 893, Section 4.9

4.9.1 Definition

User Access Restrictions are restraints implemented in the RLAN to restrict access for the user to certain hardware and/or software settings of the equipment.

4.9.2 Requirement

DFS controls (hardware or software) related to radar detection shall not be accessible to the user so that the DFS requirements described in clauses 4.7.2.1 to 4.7.2.4 can neither be disabled nor altered.

Test Results: The EUT as tested was found compliant with the specified limits.

Test Engineer: Andesron Soungpanya

Test Date: 09/10/09

IV. DFS Requirements

4.7 Dynamic Frequency Selection (DFS)

4.7.1 Introduction

An RLAN shall employ a Dynamic Frequency Selection (DFS) function to:

- detect interference from other systems and to avoid co-channel operation with these systems, notably radar systems (radar detection);
- provide on aggregate a uniform loading of the spectrum across all devices.

Radar detection is required when operating on channels whose nominal bandwidth falls partly or completely within the frequency ranges 5 250 MHz to 5 350 MHz or 5 470 MHz to 5 725 MHz. This requirement applies to all types of RLAN devices and to any type of communication between these devices.

In addition, equipment transmitting in the band 5600 - 5650MHz must also be able to detect meteorological radars employing non-constant pulse interval times. These are often referred to as staggered or interleaved PRFs (Pulse Repetition Frequencies) by which up to 3 different PRF values are used. The staggered radar bins from 301 893 v 1.5.1 were used to demonstrate compliance.

The DFS function as described in the present document is not tested for its ability to detect frequency hopping radar signals.

4.7.1.1 DFS operational modes

Within the context of the operation of the DFS function, an RLAN device shall operate in either master mode or slave mode. RLAN devices operating in slave mode (slave device) shall only operate in a network controlled by a RLAN device operating in master mode (master device).

Some RLAN devices are capable of communicating in ad-hoc manner without being attached to a network. Devices operating in this manner on channels whose nominal bandwidth falls partly or completely within the range 5 250 MHz to 5 350 MHz or 5 470 MHz to 5 725 MHz shall employ DFS and should be tested against the requirements applicable to a master.

4.7.1.2 DFS operation

The operational behaviour and individual DFS requirements that are associated with master and slave devices are as follows:

Master devices:

a) The master device shall use a Radar Interference Detection function in order to detect radar signals. b) Before initiating a network on a channel, which has not been identified as an Available Channel, the master device shall perform a Channel Availability Check to ensure that there is no radar operating on the channel. c) During normal operation, the master device shall monitor the Operating Channel (In-Service Monitoring) to ensure that there is no radar operating on the channel. d) If the master device has detected a radar signal during In-Service Monitoring, the Operating Channel is made unavailable. The master device shall instruct all its associated slave devices to stop transmitting on this (to become unavailable) channel. e) The master device shall not resume any transmissions on this Unavailable Channel during a period of time after a radar signal was detected. This period is referred as the Non-Occupancy Period.

Slave devices:

f) A slave device shall not transmit before receiving an appropriate enabling signal from a master device. g) A slave device shall stop all its transmissions whenever instructed by a master device to which it is associated. The device shall not resume any transmissions until it has again received an appropriate enabling signal from a master device. h) A slave device which is required to perform radar detection (see table D.3), shall stop its own transmissions if it has detected a radar. The Operating Channel is made unavailable for the slave device. It shall not resume any transmissions on this Unavailable Channel for a period of time equal to the Non-Occupancy Period.

See Table 13 for the applicability of DFS requirements for each of the above mentioned operational modes. The master device may implement the Radar Interference Detection function referred to under a) using another device associated with the master. In such a case, the combination shall be tested against the requirements applicable to the master. The maximum power level of a slave device will define whether or not the device needs to have a Radar Interference Detection function (see table D.3).

4.7.2 DFS technical requirements specifications

Table 13 lists the DFS related technical requirements and their applicability for each of the operational modes described in clause 4.7.1. If the RLAN device is capable of operating in more than one operational mode described in clause 4.7.1 then each operating mode shall be assessed separately.

Requirement	DFS Operational mode		
	Master	Slave without radar detection	Slave with radar detection
Channel Availability Check	✓	Not required	Not required (see Note 2)
Off-Channel CAC (see Note 1)	✓	Not required	✓ (see Note 2)
In-Service Monitoring	✓	Not required	✓
Channel Shutdown	✓	✓	✓
Non-Occupancy Period	✓	Not required	✓
Uniform Spreading	✓	Not required	Not required
<p>Note 1: Where implemented by the manufacturer.</p> <p>Note 2: Slave A slave with radar detection is not required to perform a CAC or Off-Channel CAC at initial use of the channel but only after the slave has detected a radar signal on the Operating Channel by In-Service Monitoring.</p>			

Table 13. Applicability of DFS requirements

DFS Detection Thresholds

EIRP Spectral Density	Value (see Notes 1 and 2)
10 dBm/MHz	-62 dBm
<p>Note 1: This is the level at the input of the receiver with a maximum EIRP density of 10 dBm/MHz and assuming a 0 dBi receive antenna. For devices employing different EIRP spectral density and/or a different receive antenna gain G (dBi) the DFS threshold level at the receiver input follows the following relationship: DFS Detection Threshold (dBm) = $-62 + 10 - \text{EIRP Spectral Density (dBm/MHz)} + G \text{ (dBi)}$, however the DFS threshold level shall not be lower than -64 dBm assuming a 0 dBi receive antenna gain.</p> <p>Note 2: Slave devices with a maximum EIRP of less than 23 dBm do not have to implement radar detection.</p>	

Table 14. Interference Threshold values, Master or Client incorporating In-Service Monitoring

Parameter	Value
Channel Availability Check Time	60 seconds (see Note 1)
Maximum Off-Channel CAC Time	4 hours (see Note 2)
Non-occupancy period	Minimum 30 minutes
Channel Move Time	10 seconds
Channel Closing Transmission Time	1 s
<p>Note 1: For channels whose nominal bandwidth falls completely or partly within the band 5 600 MHz to 5 650 MHz, the CAC Time shall be 10 minutes.</p> <p>Note 2: For channels whose nominal bandwidth falls completely or partly within the band 5 600 MHz to 5 650 MHz, the Maximum Off-Channel CAC Time shall be 24 hours.</p>	

Table 15. DFS Requirement values

Pulse width W [μs]	Pulse repetition frequency PRF (PPS)	Pulses per burst (PPB)
1	700	18

Table 16. Parameters of the reference DFS test signal

Parameter	Detection Probability (P_d)	
	Channels whose nominal bandwidth falls partly or completely within the 5 600 MHz to 5 650 MHz band	Other channels
CAC, Off-Channel CAC	99,99 %	60 %
In-Service Monitoring	60 %	60 %
<p>NOTE: P_d gives the probability of detection per simulated radar burst and represents a minimum level of detection performance under defined conditions. Therefore P_d does not represent the overall detection probability for any particular radar under real life conditions.</p>		


Table 17. Detection Probability

Required Radar Test Waveforms

Radar test Signal # (see Notes 1 to 3)	Pulse width W [μ s]		Pulse repetition frequency PRF (PPS)		Number of different PRFs	Pulses per burst for each PRF (PPB) (see Note 5)
	Min	Max	Min	Max		
1	0,8	5	200	1 000	1	10 (see Note 6)
2	0,8	15	200	1 600	1	15 (see Note 6)
3	0,8	15	2 300	4 000	1	25
4	20	30	2 000	4 000	1	20
5	0,8	2	300	4000	2/3	10 (see Note 6)
6	0,8	2	400	1 200	2/3	15 (see Note 6)

NOTE 1: Radar test signals 1 to 4 are constant PRF based signals. These radar test signals are intended to simulate also radars using a packet based Staggered PRF.

NOTE 2: The modulation to be used for the radar test signal 4 is a chirp modulation with a $\pm 2,5$ MHz frequency deviation which is described below.

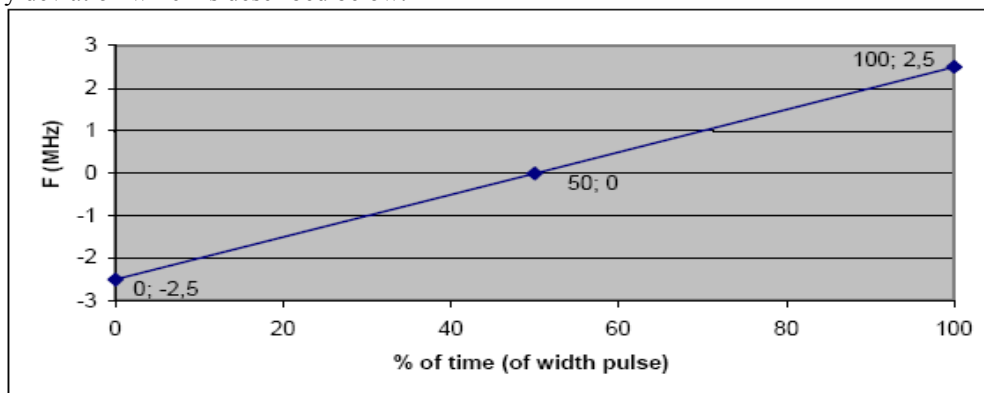

NOTE 3: Radar test signals 5 and 6 are single pulse based Staggered PRF radar test signals using 2 or 3 different PRF values. For radar test signal 5, the difference between the PRF values chosen shall be between 20 pps and 50 pps. For radar test signal 6, the difference between the PRF values chosen shall be between 80 pps and 400 pps.

NOTE 4: Apart for the Off-Channel CAC testing, the radar test signals above shall only contain a single burst of pulses.

NOTE 5: The total number of pulses in a burst is equal to the number of pulses for a single PRF multiplied by the number of different PRFs used.

NOTE 6: For the CAC and Off-Channel CAC requirements, the minimum number of pulses (for each PRF) for any of the radar test signals to be detected in the band 5 600 MHz to 5 650 MHz shall be 18.

Table 18. EN 301 893 1.5.1 Radar Test Waveforms

Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted Radar Waveform See Figure 9. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer's resolution bandwidth (RBW) was set to 1MHz and the video bandwidth (VBW) was set to MHz. A 30dB preamplifier was used in during the calibration procedure


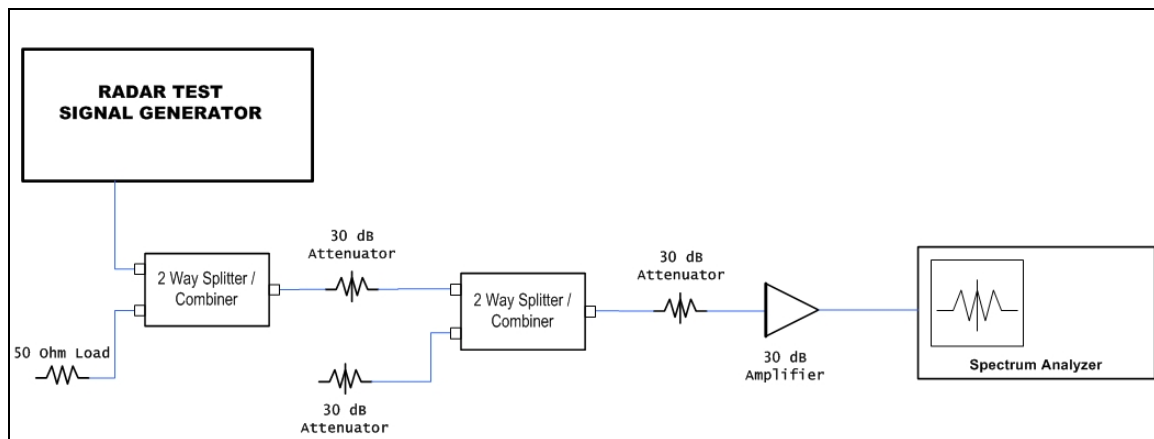


Figure 9. Radar Waveform Calibration Setup



Photograph 4. Radar Test Signal Generator

Radar Calibration

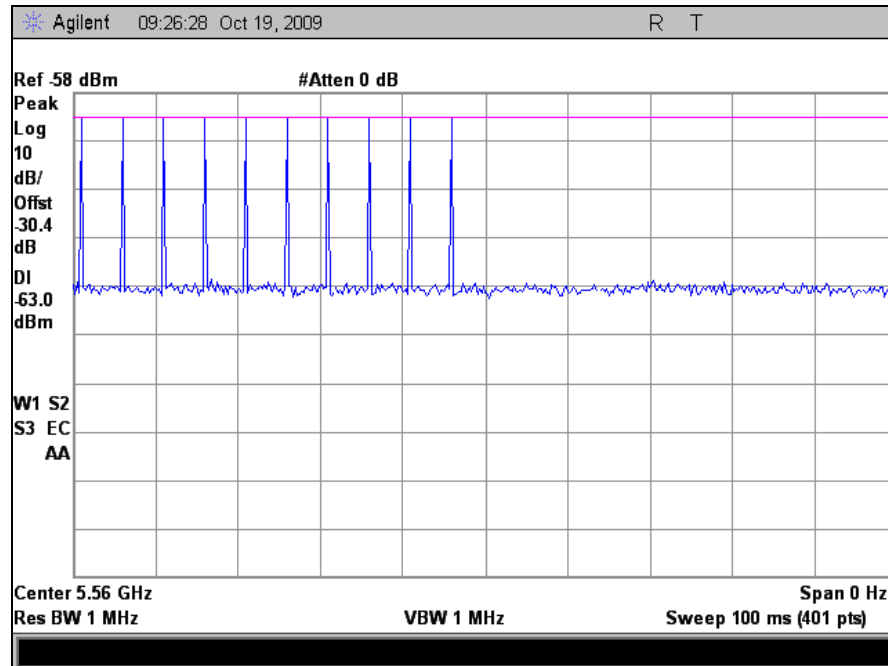

Plot 69. Bin 1 Radar Calibration

Test Setup for EUT

1. A spectrum analyzer is used as a monitor to verify that the UUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move. It is also used to monitor UUT transmissions during the Channel Availability Check Time.
2. Figure 10 shows the test setup used for injection of radar waveforms in to a slave device.

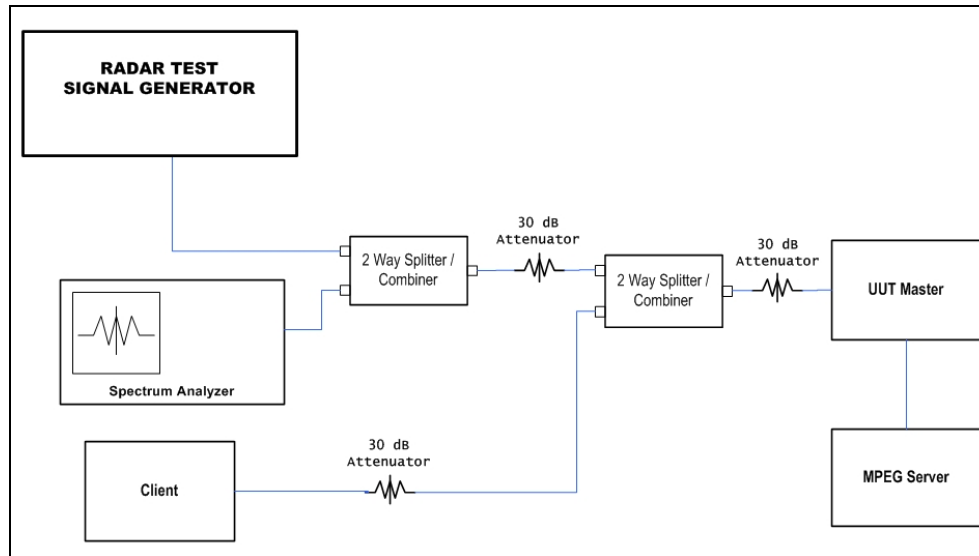


Figure 10. Test Setup for Slave Device

4.7.2.4 Channel Shutdown and 4.7.2.5 Non-Occupancy Period

Test Requirement(s): ETSI EN 301 893, Sections 4.7.2.4 & 4.7.2.5, Clause 5.3.8

Definition: 4.7.2.4.1

The *Channel Shutdown* is defined as the process initiated by the RLAN device immediately after a radar signal has been detected on an *Operating Channel*.

The master device shall instruct all associated slave devices to stop transmitting on this channel, which they shall do within the Channel Move Time.

Slave devices with a Radar Interference Detection function, shall stop their own transmissions within the Channel Move Time upon detecting a radar signal.

The aggregate duration of all transmissions of the RLAN device on this channel during the Channel Move Time shall be limited to the Channel Closing Transmission Time. The aggregate duration of all transmissions shall not include quiet periods in between transmissions.

4.7.2.5.1

The *Non-Occupancy Period* is defined as the time during which the RLAN device shall not make any transmissions on a channel after a radar signal was detected on that channel by either the *Channel Availability Check* or the *In-Service Monitoring*.

Limit(s): 4.7.2.4.2 & 4.7.2.5.2

Parameter	Limit
Channel Move Time	10 s
Channel Closing Transmission Time	1 s
Non-Occupancy Period	30 min


Test Procedure: The EUT was connected as in Figure #10. The channel selection mechanism for the Uniform Spreading requirement is disabled on the master .

The measurement was performed using normal operation of the equipment. The reference bin at a level above 10 dB above the level of the EUT, was injected into the EUT at time T_0 . The time $T_1 - T_0$ was recorded as the duration of the radar burst. At the end of time T_1 the EUT was monitored for a period ≥ 10 s and the aggregate duration of all transmissions from the EUT were recorded. The difference between T_2 , indicating the EUT had ceased all transmission, and T_1 was recorded. If the EUT was a Master then the selected channel was observed for a period of 30 min to insure no transmissions reoccurred on that channel.


Test Results: The master did detect the presence of the Radar Signal and the slave EUT was able to shut down and close the channel in the appropriate time allowed.

Test Engineer: Anderson Soungpanya


Test Date(s): 10/19/09

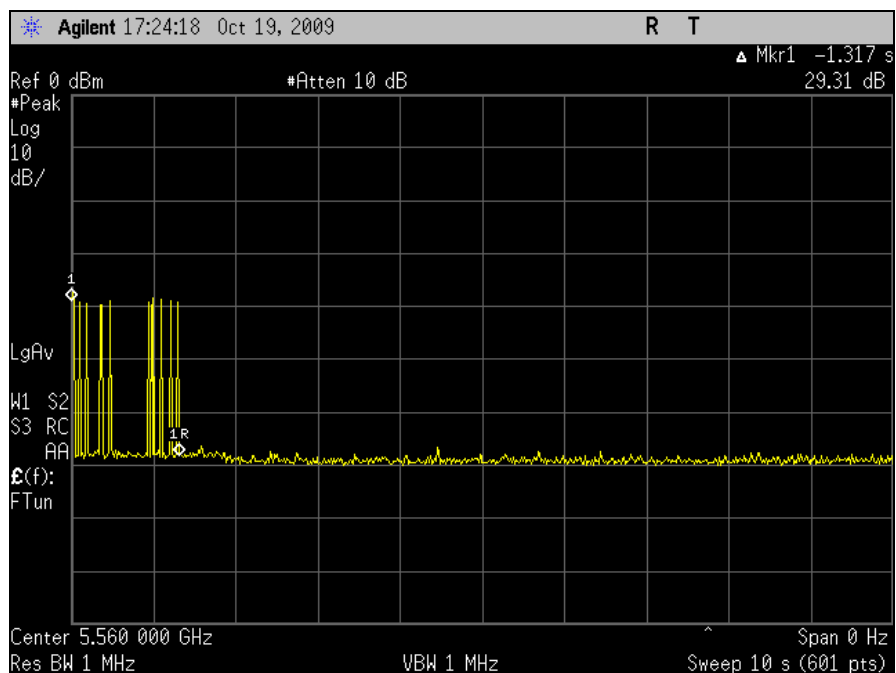

Plot 70. Move Time, 10 Second Span, 802.11n 40MHz Bandwidth

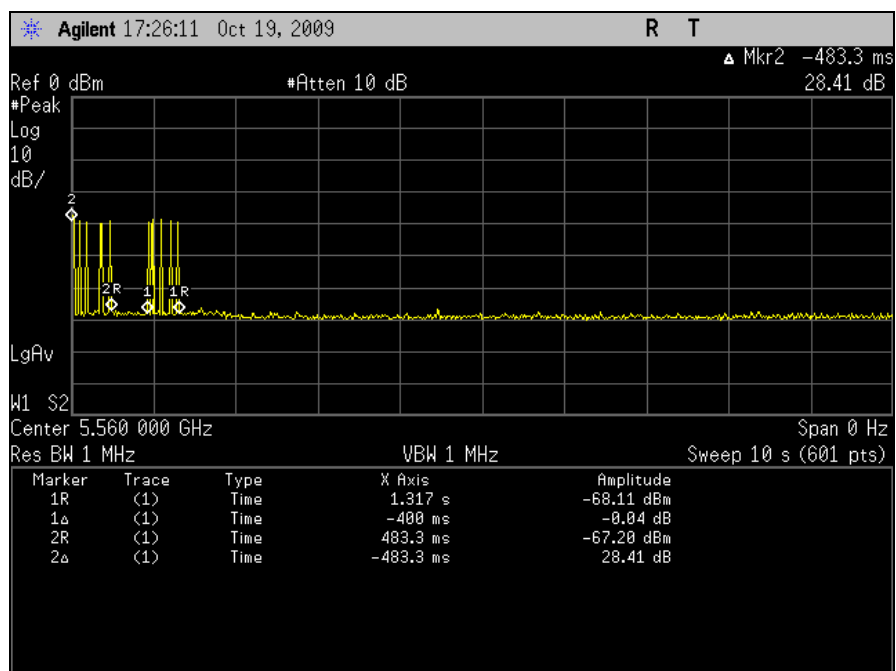

Plot 71. Close Time, 10 Second Span, 802.11n 40MHz Bandwidth

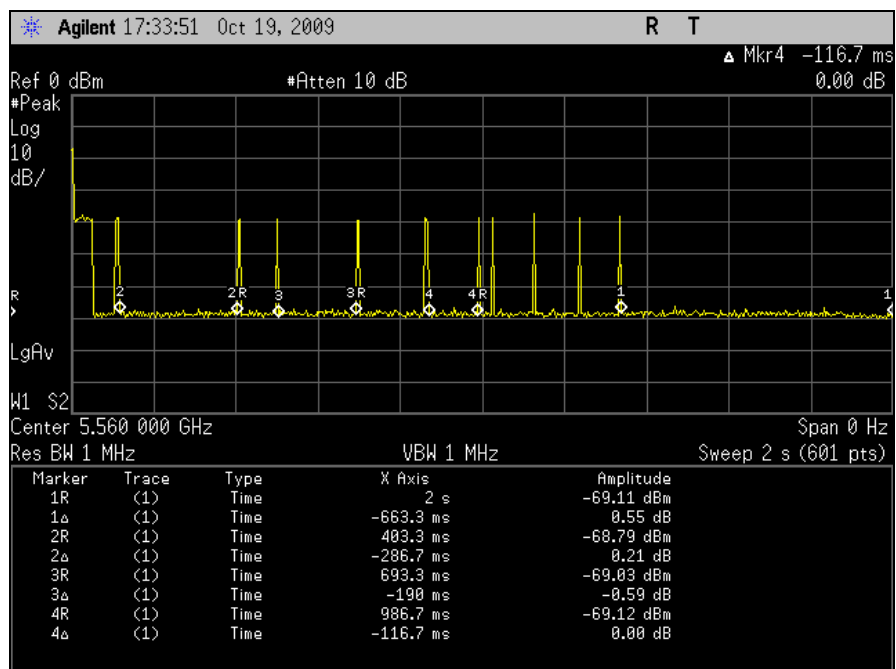

Plot 72. Close Time, 2 Second Span, 802.11n 40MHz Bandwidth

V. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	05/27/2009	05/27/2010
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	SEE NOTE	
1S2198	ANTENNA, HORN	EMCO	3115	09/03/2009	09/03/2010
1S2202	ANTENNA, HORN, 1 METER	EMCO	3116	04/10/2007	04/10/2010
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2460	ANALYZER, SPECTRUM 9 KHZ-40GHZ	AGILENT	E4407B	04/14/2009	04/14/2010
1S2034	COUPLER, DIRECTIONAL 1-20 GHZ	KRYTAR	101020020	SEE NOTE	
1S2512	TRANSIENT LIMITER	AGILENT	11947A	SEE NOTE	
1S2520	THERMO-HYGROMETER	FISHER SCIENTIFIC	11-661-7D	11/14/2007	11/13/2009
1S2482	CHAMBER, 5 METER	PANASHIELD	641431	11/22/2008	11/22/2009
1S2108	RECIEVER, EMI, RF FILTER SECTION	HEWLETT PACKARD	85460A	11/06/2008	11/06/2009
1S2399	TURNTABLE CONTROLLER	SUNOL SCIENCE	SC99V	SEE NOTE	
1S2485	BILOG ANTENNA	TESEQ	CBL6112D	03/20/2009	03/20/2010
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	

Note: Functionally verified test equipment is verified using calibrated instrumentation at the time of testing.

MET Asset	Equipment	Manufacturer	Last Cal Date	Cal Due Date
1S2243	NI PXI-1042 8-SLOT 3U CHASSIS	NATIONAL INSTRUMENTS	SEE NOTE	
1S2602	NI PXI-5421 16-BIT 100MS/S ARBITRARY WAVEFORM GENERATOR	NATIONAL INSTRUMENTS	SEE NOTE	
1S2278	NI PXI-5610 2.7GHZ RF UPCONVERTER	NATIONAL INSTRUMENTS	SEE NOTE	
1S2069	UPCONVERTER, 7206 PXI 4.9 TO 6GHZ	ASCOR	SEE NOTE	
N/A	SPLITTER/COMBINER, ZFSC-2-9G (QTY 2)	MINI-CIRCUITS	SEE NOTE	
N/A	30DB ATTENUATOR, BW-S30W2 (QTY 2)	PASTERNAK	SEE NOTE	
N/A	10DB ATTENUATOR, BW-S10W2 (QTY 2)	PASTERNAK	SEE NOTE	
1S2523	PRE-AMPLIFIER, 8449B	AGILENT	SEE NOTE	
1S2583	SPECTRUM ANALYZER, E447A	AGILENT	01/12/2009	01/12/2010
1S2460	SPECTRUM ANALYZER, E4407B	AGILENT	04/14/2009	04/14/2010

Table 19. DFS Equipment List

Note: Functionally verified test equipment is verified using calibrated instrumentation at the time of testing.

End of Report