



Test Certificate

A sample of the following product received on May 13, 2011 and tested on May 13, 2011 complied with the requirements of,

- Subpart B of Part 15 of FCC Rules for Class A digital devices
- Industry Canada Interference Causing Equipment Standard ICES 003, dated February 2004 (Class A)

given the measurement uncertainties detailed in Elliott report R83346.

Ubiquiti Networks

Model PicoStation M2-HP

Mark E. Hill
Staff Engineer

Ubiquiti Networks

Printed Name



Testing Cert #2016.01

Elliott Laboratories is accredited by the A2LA, certificate number 2016.01, to perform the test(s) listed in this certificate.
This certificate shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories

Elliott Laboratories
www.elliottlabs.com

41039 Boyce Road
Fremont, CA. 94538

510-578-3500 Phone
510-440-9525 Fax

EMC Test Report

*Information Technology Equipment
Class A Digital Device*

*FCC Part 15
Industry Canada ICES 003*

Model: PicoStation M2-HP


COMPANY: Ubiquiti Networks
91 E. Tasman Drive
San Jose, CA 95134

TEST SITE(S): Elliott Laboratories
41039 Boyce Road
Fremont, CA. 94538-2435

REPORT DATE: June 2, 2011

FINAL TEST DATES: May 13, 2011

AUTHORIZED SIGNATORY:

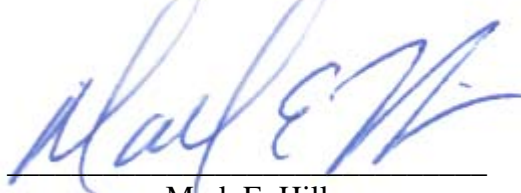

Mark E. Hill
Staff Engineer
Elliott Laboratories, An NTS Company



Testing Cert #2016.01

Elliott Laboratories is accredited by the A2LA, certificate number 2016.01, to perform the test(s) listed in this report, except where noted otherwise. This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	06-02-2011	First release	

TABLE OF CONTENTS

REVISION HISTORY	3
TABLE OF CONTENTS	4
SCOPE.....	5
OBJECTIVE	5
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS	6
CONDUCTED EMISSIONS (MAINS PORT)	6
RADIATED EMISSIONS	6
MEASUREMENT UNCERTAINTIES.....	7
EQUIPMENT UNDER TEST (EUT) DETAILS.....	8
GENERAL.....	8
ENCLOSURE.....	8
MODIFICATIONS.....	8
SUPPORT EQUIPMENT.....	8
EUT INTERFACE PORTS	8
EUT OPERATION	8
EMISSIONS TESTING	9
RADIATED AND CONDUCTED EMISSIONS.....	9
RADIATED EMISSIONS CONSIDERATIONS	9
CONDUCTED EMISSIONS CONSIDERATIONS	9
EMISSIONS MEASUREMENT INSTRUMENTATION.....	10
RECEIVER SYSTEM	10
INSTRUMENT CONTROL COMPUTER	10
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	10
IMPEDANCE STABILIZATION NETWORK (ISN)	10
FILTERS/ATTENUATORS	10
ANTENNAS.....	11
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	11
INSTRUMENT CALIBRATION.....	11
EMISSIONS TEST PROCEDURES	12
EUT AND CABLE PLACEMENT	12
CONDUCTED EMISSIONS (MAINS)	12
RADIATED EMISSIONS (SEMI-ANECHOIC AND/OR OATS TEST ENVIRONMENT)	13
Preliminary Scan.....	13
Final Maximization.....	13
SAMPLE CALCULATIONS	14
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	14
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	14
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	15
APPENDIX B TEST DATA	16
APPENDIX C PRODUCT LABELING REQUIREMENTS.....	31
APPENDIX D USER MANUAL REGULATORY STATEMENTS.....	32
APPENDIX E BASIC AND REFERENCE STANDARDS.....	33
SUBPART B OF PART 15 OF FCC RULES FOR DIGITAL DEVICES.	33
END OF REPORT	34

SCOPE

Governments and standards organizations around the world have published requirements regarding the electromagnetic compatibility (EMC) of electronic equipment. Testing has been performed on the Ubiquiti Networks model PicoStation M2-HP, pursuant to the following standards.

Standard	Title	Standard Date
FCC Part 15, Subpart B	Radio Frequency Devices	October 2009 as Amended
ICES-003, Issue 4	Digital apparatus	2004

All measurements and evaluations have been in accordance with these specifications, test procedures, and measurement guidelines as outlined in Elliott Laboratories test procedures, and in accordance with the standards referenced therein (refer to Appendix E).

OBJECTIVE

The objective of Ubiquiti Networks is to verify compliance with FCC requirements for digital devices and Canada's requirements for digital devices;

STATEMENT OF COMPLIANCE

The tested sample of Ubiquiti Networks model PicoStation M2-HP complied with the requirements of:

Standard/Regulation	Equipment Type/Class	Standard Date
Subpart B of Part 15 of the FCC Rules (CFR title 47)	Class A	2009 as amended
ICES-003, Issue 4	Class A	2004

The test results recorded herein are based on a single type test of the Ubiquiti Networks model PicoStation M2-HP and therefore apply only to the tested sample(s). The sample was selected and prepared by Jennifer Sanchez of Ubiquiti Networks.

Maintenance of compliance is the responsibility of the company. Any modification of the product that could result in increased emissions or susceptibility should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different enclosure, different line filter or power supply, harnessing and/or interface cable changes, etc.).

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS

The following emissions tests were performed on the Ubiquiti Networks model PicoStation M2-HP. The measurements were extracted from the data recorded during testing and represent the highest amplitude emissions relative to the specification limits. The complete test data is provided in the appendices of this report.

CONDUCTED EMISSIONS (MAINS PORT)

Frequency Range Operating Voltage	Standard/Section	Requirement	Measurement	Margin	Status
0.15-30 MHz, 120V, 60Hz	FCC § 15.107(b) (Class A)	0.15-0.5 MHz: 79 dB μ V QP 66 dB μ V Av 0.5-30 MHz: 73 dB μ V QP 60 dB μ V Av	43.0dB μ V @ 21.663MHz	-7.0dB	Complied

RADIATED EMISSIONS

Frequency Range	Standard/Section	Requirement	Measurement	Margin	Status
30-1000 MHz	FCC §15.109(g) Class A	30 – 230, 40 dB μ V/m 230 – 1000, 47 dB μ V/m (10m limit)	34.8dB μ V/m @101.88 MHz	-5.2dB	Complied
1000-2000 MHz Note 1	FCC §15.109(b) Class A	49.5 dB μ V/m Av 69.5 dB μ V/m Pk (10m limit)	44.8dB μ V/m @1170.0 MHz	-4.7dB	Complied
Note 1 As the highest frequency generated in the EUT was declared to be between 108 MHz and 500 MHz, the upper frequency for radiated measurements was 2 GHz.					

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below were calculated using the approach described in CISPR 16-4-2:2003 using a coverage factor of $k=2$, which gives a level of confidence of approximately 95%. The levels were found to be below levels of U_{cispr} and therefore no adjustment of the data for measurement uncertainty is required.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions	dBuV or dBuA	150kHz – 30MHz	± 2.2 dB
Radiated Electric Field	dBuV/m	30 – 1000 MHz	± 3.6 dB
		1000 – 40,000 MHz	± 6.0 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Ubiquiti Networks model PicoStation M2-HP is an Access Point that is designed for wireless networking. Since the EUT would be placed on a table top during operation, the EUT was treated as table-top equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 15 Volt , 800mAmps.

The sample was received on May 13, 2011 and tested on May 13, 2011. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Ubiquiti Networks	PicoStation M2-HP	2.4GHz Access Point	002722121C3F	SWX-M2
Ubiquiti Networks	UBI-POE-15-8	POE Injector	n/a	n/a

ENCLOSURE

The EUT enclosure is primarily constructed of fabricated plastic. It measures approximately 4 cm wide by 4 cm deep by 33.5 cm high.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

No local support equipment was used for testing:

The following equipment was used as remote support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Dell	Inspiron 2200	PC Laptop	Elliott EMC Laptop# 3	n/a

EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port		Description	Cable(s)	
From	To		Shielded/Unshielded	Length(m)
LAN(EUT)	POE	Cat. 5	Unshielded	1
POE Injector(POE)	Remote PC Laptop	Cat. 5	Unshielded	2

EUT OPERATION

During emissions testing the EUT was pinging to the remote laptop.

EMISSIONS TESTING**RADIATED AND CONDUCTED EMISSIONS**

Final test measurements were taken at the Elliott Laboratories Anechoic Chambers listed below. The test sites contain separate areas for radiated and conducted emissions testing. The sites conform to the requirements of ANSI C63.4: 2003 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are registered with the VCCI and are on file with the FCC and Industry Canada.

Site	Registration Numbers FCC	Location
Chamber 5	211948	41039 Boyce Road Fremont, CA 94538-2435

RADIATED EMISSIONS CONSIDERATIONS

Radiated emissions measurements were made with the EUT powered from a supply voltage within the expected tolerances of each nominal operating voltage/frequency for each geographical regions covered by the scope of the standards referenced in this report.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4 and CISPR 22.

Mains port measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

Telecommunication port measurements are made with the unshielded network cable connected through an impedance stabilization network (ISN) appropriate to the type of cable employed. Where no suitable ISN is available measurements are made using a capacitive voltage probe (CVP) and a current probe. If shielded cables are specified for the port under test the measurement is made of the noise voltage on the shield of the cable via a 100 ohm resistor.

EMISSIONS MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1:2006 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7 GHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000 MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

Measurements are converted to the field strength at an antenna or voltage developed at the LISN (or ISN) measurement port, which is then compared directly with the appropriate specification limit under software control of the test receivers and spectrum analyzers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted emission measurements utilize a fifty micro-Henry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250-uH CISPR adapter. This network provides for calibrated radio-frequency noise measurements by the design of the internal low-pass and high-pass filters on the EUT and measurement ports, respectively.

IMPEDANCE STABILIZATION NETWORK (ISN)

Telecommunication port conducted emission measurements utilize an Impedance Stabilization Network with a 150-ohm termination impedance and specific longitudinal conversion loss as the voltage monitoring point. This network provides for calibrated radio-frequency noise measurements by the design of the internal circuitry on the EUT and measurement ports, respectively. For current measurements, a current probe with a uniform frequency response and less than 1-ohm insertion impedance is used.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high-amplitude transient events.

ANTENNAS

A bilog antenna or combination of biconnical and log periodic antennas are used to cover the range from 30 MHz to 1000 MHz. Narrowband tuned dipole antennas may be used over the entire 30 to 1000 MHz frequency range for precision measurements of field strength. Above 1000 MHz, horn antennas are used. The antenna calibration factors are included in site factors that are programmed into the test receivers or data collection software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor drive to vary the antenna height.

ANSI C63.4, CISPR 22 and KN22 specify that the test height above ground for table-mounted devices shall be 80 centimeters. Floor-mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material up to 12-mm thick if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the company's specifications. An appendix of this report contains the list of test equipment used and calibration information.

EMISSIONS TEST PROCEDURES

EUT AND CABLE PLACEMENT

The standards require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, CISPR 22 and KN22, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS (MAINS)

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest-amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak-mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord. Emissions that have peak values close to the specification limit are also measured in the quasi-peak and average detection modes to determine compliance except when the amplitude of the emission when measured with the quasi-peak detector is more than 10 dB below the specification limit for average measurements. In this case only quasi-peak measurements are performed.

RADIATED EMISSIONS (SEMI-ANECHOIC and/or OATS TEST ENVIRONMENT)

Radiated emissions measurements in a semi-anechoic environment are performed in two phases (preliminary scan and final maximization). Final maximization may be performed on an OATS.

Preliminary Scan

A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulations specified on page 1. One or more of these are performed with the antenna polarized vertically and one or more of these are performed with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit. A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions if required. Other methods used during the preliminary scan for EUT emissions involve scanning with near-field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final Maximization

During final maximization, the highest-amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth that results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions that have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

For measurements above 1GHz every effort is made to ensure the EUT remains within the cone of radiation of the measurement antenna (i.e. 3dB beam-width of the antenna). This may include rotating the product and/or angling the measurement antenna.

When Testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5m. Maximum emissions are found within this restricted range because emission levels decrease over distance and as the antenna is raised above 2.5m, the distance from the EUT increases. As a result of the increased measurement distance, at antenna heights above 2.5m, lower emission levels are measured as compared to emissions levels measured at antenna heights at 2.5m and below.

SAMPLE CALCULATIONS**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

$$\begin{aligned} R_r &= \text{Receiver Reading in dBuV} \\ S &= \text{Specification Limit in dBuV} \\ M &= \text{Margin to Specification in +/- dB} \end{aligned}$$

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$\begin{aligned} F_d &= \text{Distance Factor in dB} \\ D_m &= \text{Measurement Distance in meters} \\ D_s &= \text{Specification Distance in meters} \end{aligned}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$\begin{aligned} R_r &= \text{Receiver Reading in dBuV/m} \\ F_d &= \text{Distance Factor in dB} \\ R_c &= \text{Corrected Reading in dBuV/m} \\ L_s &= \text{Specification Limit in dBuV/m} \\ M &= \text{Margin in dB Relative to Spec} \end{aligned}$$

Appendix A Test Equipment Calibration Data**Radiated Emissions, 30 - 2,000 MHz, 13-May-11**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1657	5/28/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	4/6/2012
Hewlett Packard	Preamplifier, 100 kHz - 1.3 GHz	8447D OPT 010	1826	5/27/2011

Conducted Emissions - AC Power Ports, 13-May-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	LISN, 10 kHz-100 MHz	3825/2	1293	3/1/2012
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1594	5/27/2011
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	4/6/2012

Appendix B Test Data

T83189 Pages 17 - 30



EMC Test Data

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
		Account Manager:	Susan Pelzl
Contact:	Jennifer Sanchez		
Emissions Standard(s):	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1,	Class:	A

EMC Test Data

For The

Ubiquiti Networks

Model

PicoStation M2 - HP

Date of Last Test: 5/19/2011

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
		Account Manager:	Susan Pelzl
Contact:	Jennifer Sanchez		
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	B

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 5/13/2011
 Test Engineer: Hong Stenerson
 Test Location: Fremont Chamber #5

Config. Used: 1
 Config Change: None
 EUT Voltage: Refer to individual run

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions:
 Temperature: 22 °C
 Rel. Humidity: 33 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 230V/50Hz	Class B	Pass	43.0dBµV @ 21.663MHz (-7.0dB)
2	CE, AC Power, 120V/60Hz	Class B	Pass	43.0dBµV @ 21.663MHz (-7.0dB)

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Ubiquiti Networks	Job Number: J82981
Model: PicoStation M2 - HP	T-Log Number: T83189
Contact: Jennifer Sanchez	Account Manager: Susan Pelzl
Standard: FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class: B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

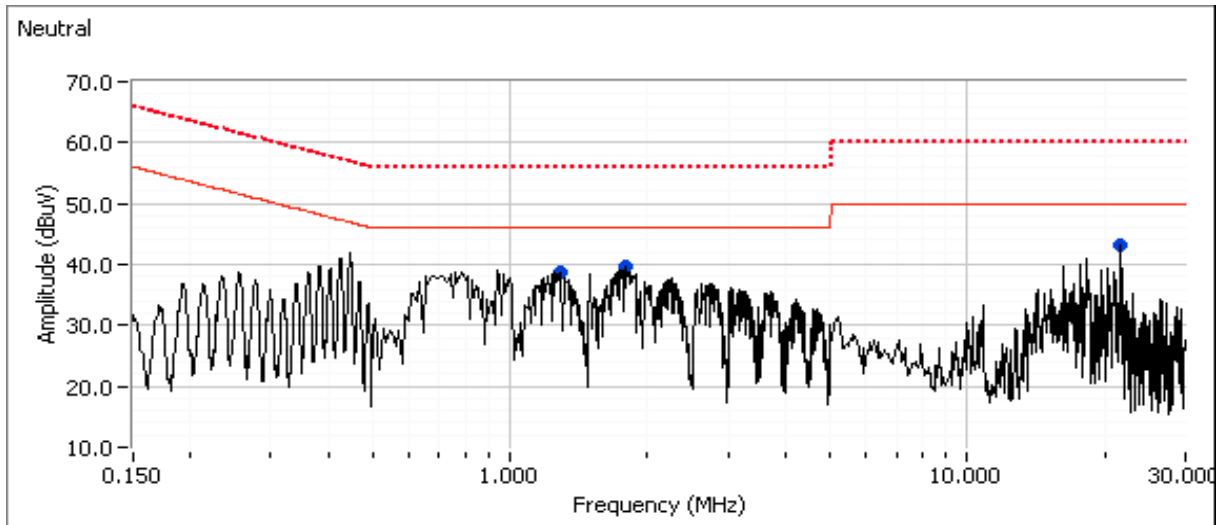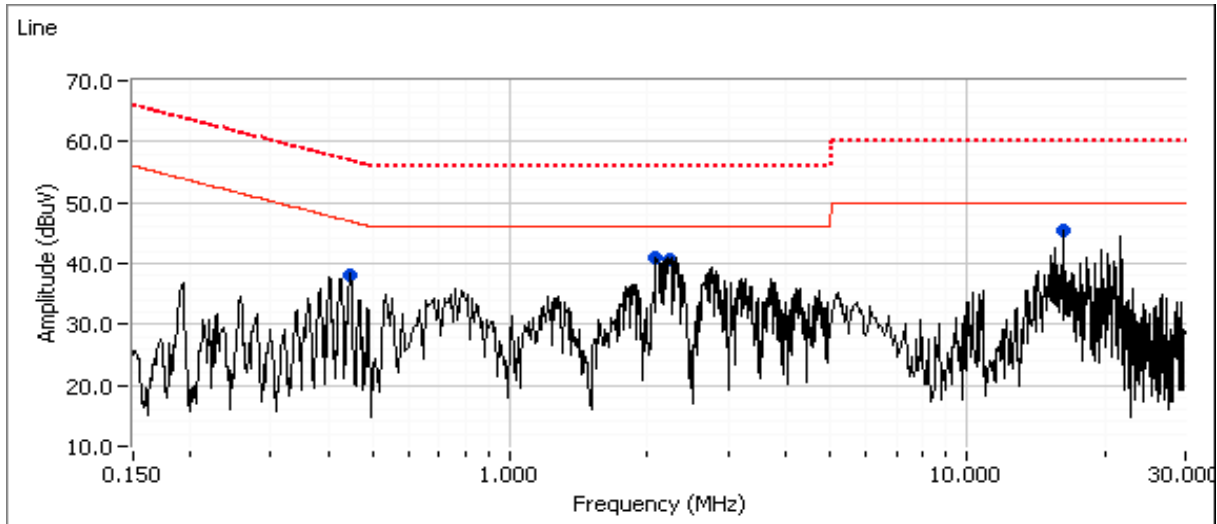

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
Contact:	Jennifer Sanchez	Account Manager:	Susan Pelzl
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	B

Run 1 (Continued)
Preliminary peak readings captured during pre-scan (peak readings vs. average limit)



Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.446	38.2	Line 1	46.9	-8.7	Peak	
2.226	40.7	Line 1	46.0	-5.3	Peak	
2.089	40.9	Line 1	46.0	-5.1	Peak	
16.229	45.4	Line 1	50.0	-4.6	Peak	
1.802	39.8	Neutral	46.0	-6.2	Peak	
1.292	38.6	Neutral	46.0	-7.4	Peak	
21.663	43.3	Neutral	50.0	-6.7	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
21.663	43.0	Neutral	50.0	-7.0	AVG	AVG (0.10s)
16.229	41.4	Line 1	50.0	-8.6	AVG	AVG (0.10s)
1.802	36.4	Neutral	46.0	-9.6	AVG	AVG (0.10s)
1.292	35.4	Neutral	46.0	-10.6	AVG	AVG (0.10s)
2.226	35.0	Line 1	46.0	-11.0	AVG	AVG (0.10s)
0.446	34.7	Line 1	46.9	-12.2	AVG	AVG (0.10s)
2.226	40.7	Line 1	56.0	-15.3	QP	QP (1.00s)
16.229	44.1	Line 1	60.0	-15.9	QP	QP (1.00s)
21.663	43.4	Neutral	60.0	-16.6	QP	QP (1.00s)
1.802	38.3	Neutral	56.0	-17.7	QP	QP (1.00s)
1.292	38.3	Neutral	56.0	-17.7	QP	QP (1.00s)
0.446	38.1	Line 1	56.9	-18.8	QP	QP (1.00s)
2.089	33.4	Line 1	56.0	-22.6	QP	QP (1.00s)
2.089	18.1	Line 1	46.0	-27.9	AVG	AVG (0.10s)

Client: Ubiquiti Networks	Job Number: J82981
Model: PicoStation M2 - HP	T-Log Number: T83189
Contact: Jennifer Sanchez	Account Manager: Susan Pelzl
Standard: FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class: B

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

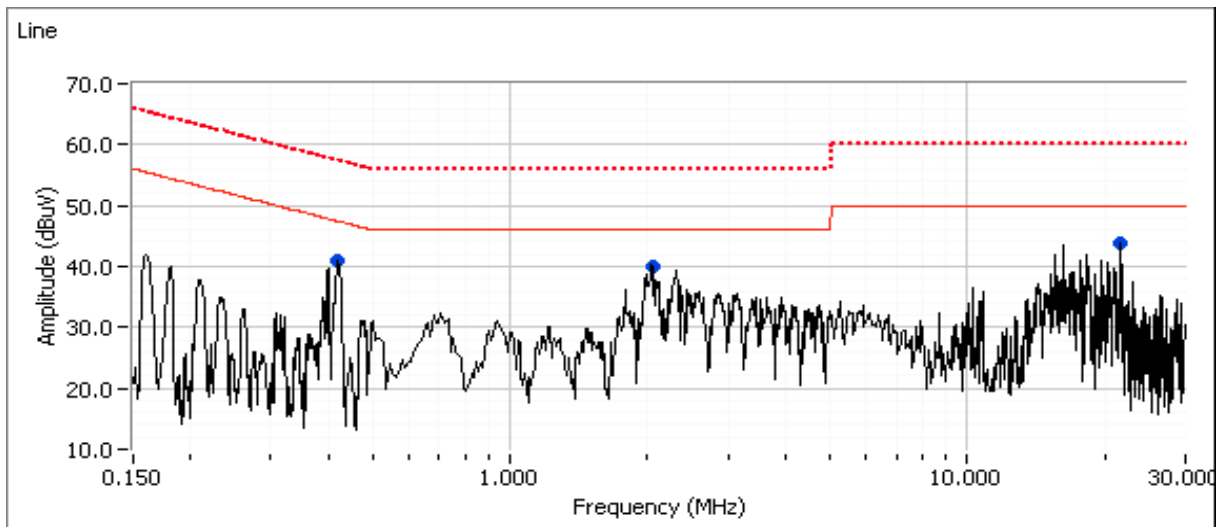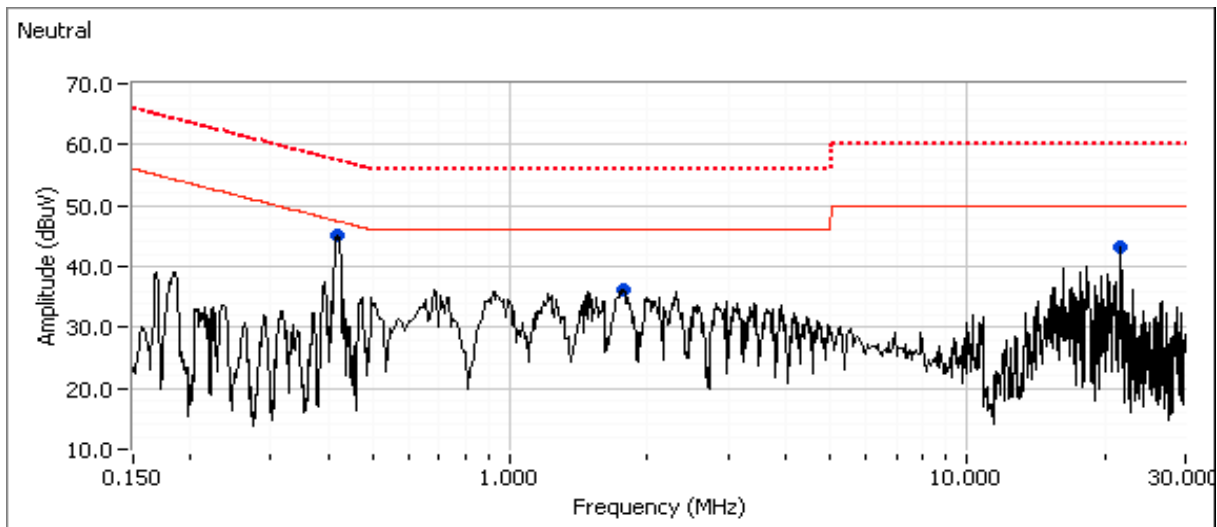

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
Contact:	Jennifer Sanchez	Account Manager:	Susan Pelzl
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	B


Run 2 (Continued)
Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.417	45.2	Neutral	47.5	-2.3	Peak	
1.758	36.3	Neutral	46.0	-9.7	Peak	
21.663	43.1	Neutral	50.0	-6.9	Peak	
0.419	40.8	Line 1	47.5	-6.7	Peak	
2.046	39.9	Line 1	46.0	-6.1	Peak	
21.663	43.8	Line 1	50.0	-6.2	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
21.663	43.0	Line 1	50.0	-7.0	AVG	AVG (0.10s)
21.663	42.8	Neutral	50.0	-7.2	AVG	AVG (0.10s)
0.417	39.4	Neutral	47.5	-8.1	AVG	AVG (0.10s)
0.417	45.9	Neutral	57.5	-11.6	QP	QP (1.00s)
0.419	34.8	Line 1	47.5	-12.7	AVG	AVG (0.10s)
21.663	44.4	Line 1	60.0	-15.6	QP	QP (1.00s)
21.663	43.2	Neutral	60.0	-16.8	QP	QP (1.00s)
0.419	40.4	Line 1	57.5	-17.1	QP	QP (1.00s)
2.046	38.2	Line 1	56.0	-17.8	QP	QP (1.00s)
2.046	27.8	Line 1	46.0	-18.2	AVG	AVG (0.10s)
1.758	27.5	Neutral	46.0	-18.5	AVG	AVG (0.10s)
1.758	35.5	Neutral	56.0	-20.5	QP	QP (1.00s)

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
Contact:	Jennifer Sanchez	Account Manager:	Susan Pelzl
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	B

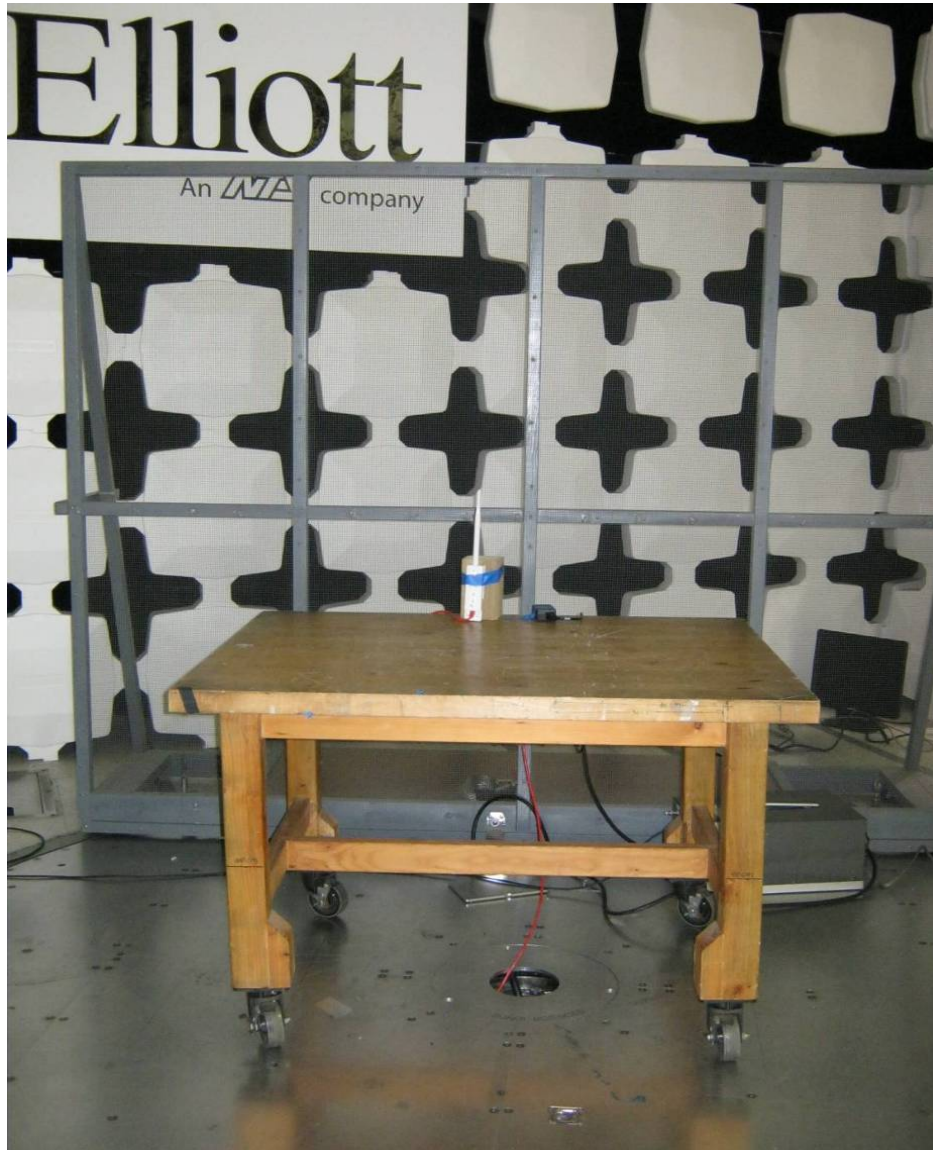

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
Contact:	Jennifer Sanchez	Account Manager:	Susan Pelzl
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	B



Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
		Account Manager:	Susan Pelzl
Contact:	Jennifer Sanchez		
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	A

Radiated Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 5/13/2011	Config. Used: 1
Test Engineer: Hong Stenerson	Config Change: None
Test Location: Fremont Chamber #5	EUT Voltage: 230V/50Hz

General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing. Any remote support equipment was located outside the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions:

Temperature:	22 °C
Rel. Humidity:	33 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	Radiated Emissions 30 - 1000 MHz, Preliminary	Class A	Pass	34.8dBµV/m @ 101.88MHz (-5.2dB)
2	Radiated Emissions 30 - 1000 MHz, Maximized	Class A	Pass	34.8dBµV/m @ 101.88MHz (-5.2dB)
3	Radiated Emissions 1 GHz - 2 GHz Maximized	FCC Class A	pass	44.8dBµV/m @ 1170.0MHz (-4.7dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard



No deviations were made from the requirements of the standard.

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
Contact:	Jennifer Sanchez	Account Manager:	Susan Pelzl
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	A

Run #1: Preliminary Radiated Emissions, 30 - 1000 MHz

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	5	10	-6.0

EUT and Test Configuration Details :

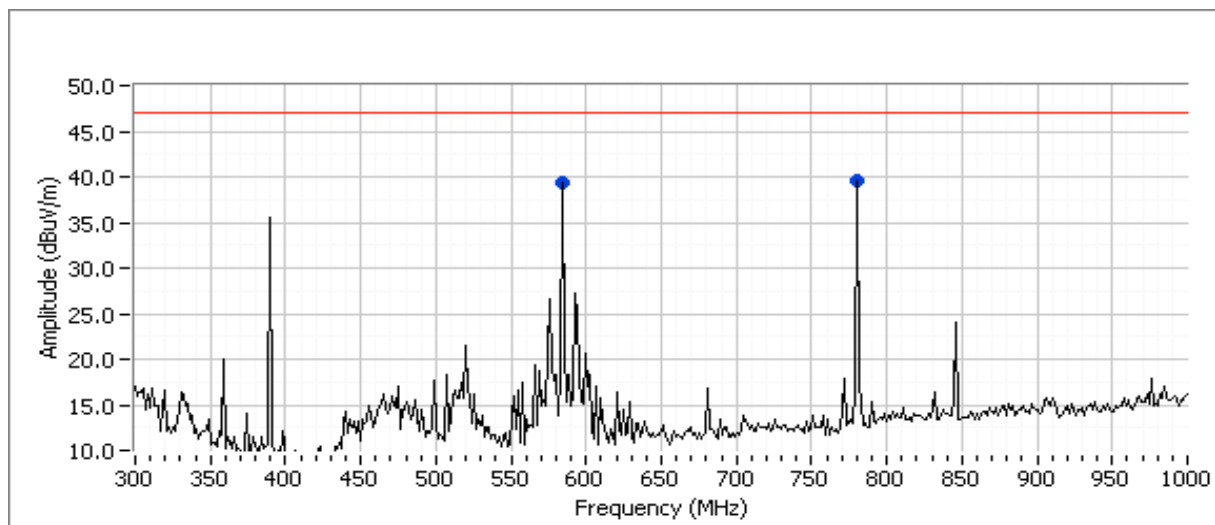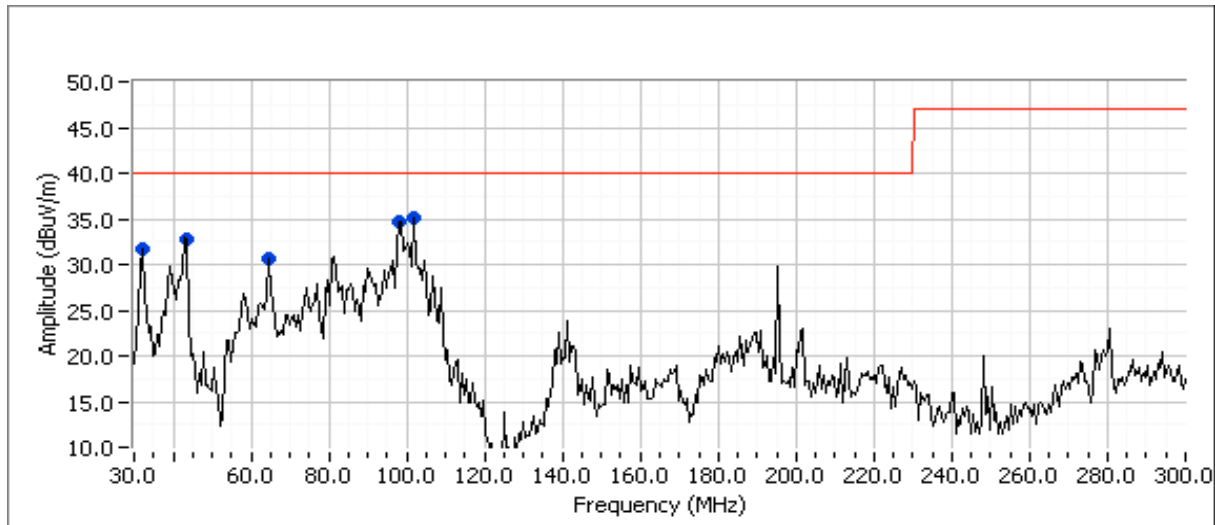

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
Contact:	Jennifer Sanchez	Account Manager:	Susan Pelzl
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	A

Run 1 (Continued)
Preliminary peak readings captured during pre-scan

Frequency MHz	Level dB μ V/m	Pol v/h	EN 55022 A		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
101.879	35.1	V	40.0	-4.9	Peak	252	1.0	
98.521	34.7	V	40.0	-5.3	Peak	232	1.5	
43.532	32.7	V	40.0	-7.3	Peak	8	1.0	
32.598	31.6	V	40.0	-8.4	Peak	72	1.0	
64.773	30.6	V	40.0	-9.4	Peak	267	1.0	
780.010	39.5	V	47.0	-7.5	Peak	144	1.5	
585.014	39.4	H	47.0	-7.6	Peak	146	1.0	

Preliminary quasi-peak readings (no manipulation of EUT interface cables)

Frequency MHz	Level dB μ V/m	Pol v/h	EN 55022 A		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
101.879	34.8	V	40.0	-5.2	QP	240	1.0	QP (1.00s)
98.521	33.2	V	40.0	-6.8	QP	219	1.1	QP (1.00s)
780.010	39.0	V	47.0	-8.0	QP	149	1.5	QP (1.00s)
43.532	31.0	V	40.0	-9.0	QP	3	1.0	QP (1.00s)
32.598	30.6	V	40.0	-9.4	QP	58	1.0	QP (1.00s)
64.773	29.9	V	40.0	-10.1	QP	242	1.2	QP (1.00s)
585.014	23.5	H	47.0	-23.5	QP	191	1.0	QP (1.00s)

Run #2: Maximized Readings From Run #1
Maximized quasi-peak readings (includes manipulation of EUT interface cables)


Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	5	10	-6.0

Frequency MHz	Level dB μ V/m	Pol v/h	EN 55022 A		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
101.879	34.8	V	40.0	-5.2	QP	240	1.0	Got lower reading after Max.
98.521	33.2	V	40.0	-6.8	QP	219	1.1	Got lower reading after Max.
780.010	39.4	V	47.0	-7.6	QP	147	1.6	QP (1.00s)
43.532	31.2	V	40.0	-8.8	QP	0	1.0	QP (1.00s)
32.598	30.7	V	40.0	-9.3	QP	49	1.0	QP (1.00s)
64.773	30.0	V	40.0	-10.0	QP	239	1.0	QP (1.00s)
585.014	29.7	H	47.0	-17.3	QP	147	1.0	QP (1.00s)

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
Contact:	Jennifer Sanchez	Account Manager:	Susan Pelzl
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	A

Run #3: Maximized Readings, 1000 - 2000 MHz

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1000 - 2000 MHz	5	10	-6.0

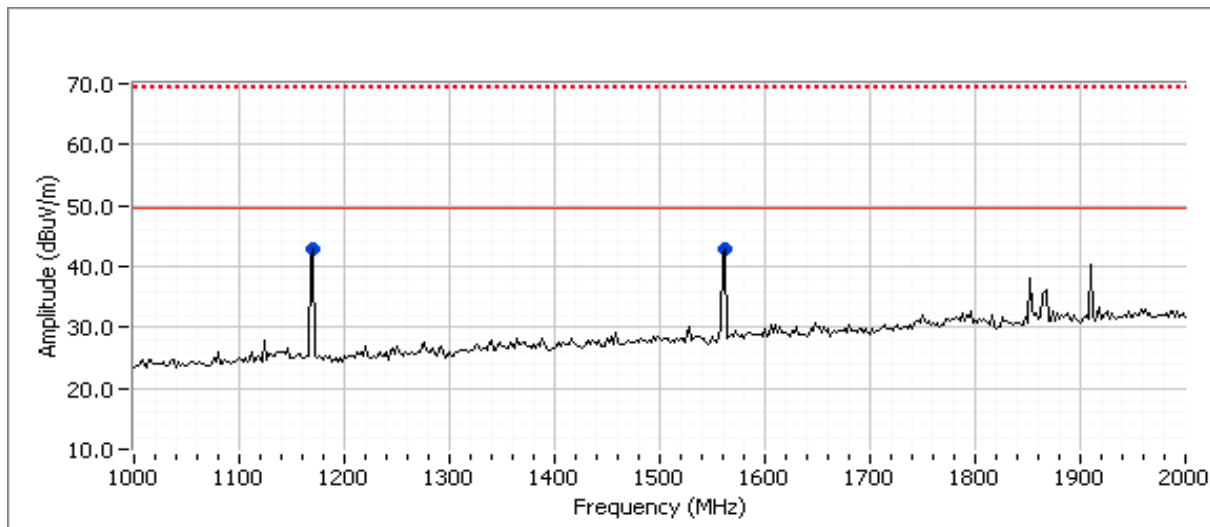

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)


Frequency MHz	Level dB μ V/m	Pol v/h	FCC A		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1560.020	43.0	V	49.5	-6.5	Peak	182	1.0	
1170.000	42.9	V	49.5	-6.6	Peak	163	1.5	

Final peak and average readings

Frequency MHz	Level dB μ V/m	Pol v/h	FCC A		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1170.000	44.8	V	49.5	-4.7	AVG	170	1.3	AVG (0.10s)
1560.010	42.9	V	49.5	-6.6	AVG	175	1.0	AVG (0.10s)
1560.010	50.0	V	69.5	-19.5	PK	175	1.0	PK (0.10s)
1170.000	49.6	V	69.5	-19.9	PK	170	1.3	PK (0.10s)

Note 1: Above 1 GHz, the limit is based on an average measurement. In addition, the peak reading of any emission above 1 GHz can not exceed the average limit by more than 20 dB.

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
Contact:	Jennifer Sanchez	Account Manager:	Susan Pelzl
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	A

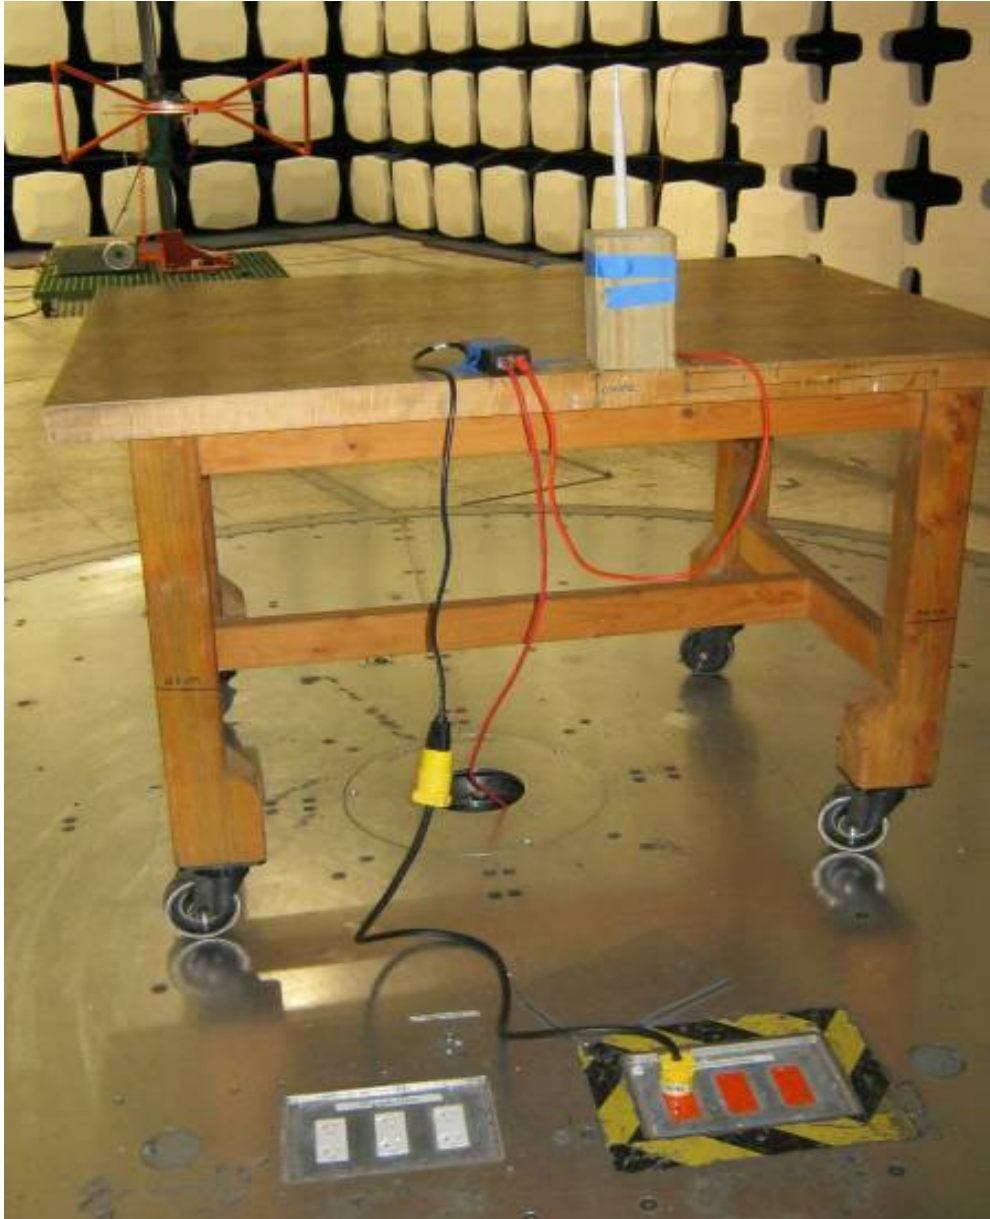

Client:	Ubiquiti Networks	Job Number:	J82981
Model:	PicoStation M2 - HP	T-Log Number:	T83189
Contact:	Jennifer Sanchez	Account Manager:	Susan Pelzl
Standard:	FCC, EN 301-489-1 v1.8.1, EN 301-489-17 V2.1.1, FCC Part 15.247	Class:	A



Appendix C Product Labeling Requirements

The following information has been provided to clarify notification, equipment labeling requirements and information that must be included in the operator's manual. These requirements may be found in the standards/regulations listed in the scope of this report.

Label Location

The required label(s) must be in a *conspicuous location* on the product, which is defined as any location readily visible to the user of the device without the use of tools.

Label Attachment

The label(s) must be *permanently attached* to the product, which is defined as attached such that it can normally be expected to remain fastened to the equipment during the equipment's expected useful life. A paper gum label will generally not meet this condition.

United States Class A Label

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Industry Canada

For ICES-003 (digital apparatus), the product must be labeled with a notice indicating compliance e.g.

This Class A digital apparatus complies with Canadian ICES-003
Cet appareil numérique de la classe A est conforme à la norme NMB-003
du Canada

If there is limited space on the product then the text may be placed in the manual:

Appendix D User Manual Regulatory Statements

Where special accessories, such as shielded cables, are required in order to meet the emission limits, appropriate instructions regarding the need to use such accessories must be contained on the first page of text concerned with the installation of the device in the operator's manual.

A requirement by FCC regulations, and recommended for all regulatory markets, is a cautionary statement to the end user that changes or modifications to the device not expressly approved by you, the manufacturer, could void their right to operate the equipment.

United States Class A Manual Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Note: Additional information about corrective measures may also be provided to the user at the company's option.

The FCC has indicated that the radio interference statement be bound in the same manner as the operator's manual. Thus, a loose-leaf insert page in a bound or center-spine and stapled manual would not meet this condition.

Appendix E Basic and Reference Standards

Subpart B of Part 15 of FCC Rules for digital devices.

FCC Part 15 Subpart B references the use of ANSI C63.4–2003: “*Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz*” for the purposes of evaluating the radiated and conducted emissions from digital devices.

End of Report

This page is intentionally blank and marks the last page of this test report.