



MET Laboratories, Inc.

Safety Certification - EMI - Telecom Environmental Simulation

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (510) 489-6300 • FAX (510) 489-6372

June 26, 2009

Ubiquiti Networks
495-499 Montague Expressway
Milpitas, CA 95035

Dear Robert Pera,

Enclosed is the EMC Wireless test report for compliance testing of the Ubiquiti Networks, M2 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B, ICES-003, Issue 4 February 2004 for a Class A Digital Device and FCC Part 15 Subpart C, RSS-210, Issue 7, June 2007 for Intentional Radiators

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Sanchez
Documentation Department

Reference: (\Ubiquiti Networks\EMCS81509-FCC247_Rev3)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



Ubiquiti Networks
M2

Electromagnetic Compatibility
Cover Page
CFR Title 47, Part 15, Subpart B and C, RSS-210 & ICES-003

Electromagnetic Compatibility Criteria Test Report

for the

**Ubiquiti Networks
Model M2**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators

MET Report: EMCS81509-FCC247_Rev3

June 26, 2009

Prepared For:

**Ubiquiti Networks
495-499 Montague Expressway
Milpitas, CA 95035**

Prepared By:
MET Laboratories, Inc.
3162 Belick St.
Santa Clara, CA 95054



Ubiquiti Networks
M2

Electromagnetic Compatibility
Cover Page
CFR Title 47, Part 15, Subpart B and C, RSS-210 & ICES-003

Electromagnetic Compatibility Criteria Test Report

for the

**Ubiquiti Networks
Model M2**

Tested Under

the FCC Certification Rules
contained in
Title 47 of the CFR, Part 15.247, Subpart C
for Intentional Radiators

A handwritten signature in black ink, appearing to read "AS/P".

Anderson Soungpanya, Project Engineer
Electromagnetic Compatibility Lab

A handwritten signature in blue ink, appearing to read "Jennifer Sanchez".

Jennifer Sanchez
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210, Issue 7, June 2007 under normal use and maintenance.

A handwritten signature in black ink, appearing to read "Shawn McMillen".

Shawn McMillen, Wireless Manager
Electromagnetic Compatibility Lab



Ubiquiti Networks
M2

Electromagnetic Compatibility
Report Status
CFR Title 47, Part 15, Subpart B and C, RSS-210 & ICES-003

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	May 22, 2009	Initial Issue.
1	June 23, 2009	Editorial corrections.
2	June 25, 2009	Rev 2
3	June 26, 2009	Rev 3



Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	6
	D. Description of Test Sample.....	6
	E. Equipment Configuration.....	8
	F. Support Equipment	8
	G. Ports and Cabling Information.....	8
	H. Mode of Operation.....	9
	I. Method of Monitoring EUT Operation.....	9
	J. Modifications	9
	a) Modifications to EUT.....	9
	b) Modifications to Test Standard.....	9
	K. Disposition of EUT	9
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	10
	§ 15.107(a) Conducted Emissions Limits.....	11
	Radiated Emission Limits.....	15
	Radiated Emissions Limits	15
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	21
	§ 15.203 Antenna Requirement.....	22
	§ 15.207(a) Conducted Emissions Limits.....	23
	§ 15.247(a) 6 dB and 99% Bandwidth.....	27
	§ 15.247(b) Peak Power Output and RF Exposure.....	37
	§ 15.247(d) Spurious Emissions Requirements – Radiated and RF Conducted	61
	§ 15.247(d) Peak Power Spectral Density	158
V.	Test Equipment	179
VI.	Certification & User's Manual Information.....	181
	A. Certification Information	182
	B. Label and User's Manual Information	186
VII.	ICES-003 Procedural & Labeling Requirements.....	188



List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing	2
Table 2. EUT Summary Table.....	4
Table 3. References	5
Table 4. Equipment Configuration	8
Table 5. Support Equipment.....	8
Table 6. Ports and Cabling Information	8
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)	11
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz).....	12
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz).....	13
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	15
Table 11. Radiated Emissions Limits calculated from ICES-003 Issue 4 February 2004.....	15
Table 12. FCC 15B Radiated Emissions Limits Test Results, 30 MHz – 1GHz.....	16
Table 13. ICES-003 Radiated Emissions Limits Test Results, 30MHz – 1GHz	17
Table 14. FCC 15B Radiated Emissions Limits Test Results, 1GHz – 6GHz	18
Table 15. ICES-003 Radiated Emissions Limits Test Results, 1GHz – 6GHz.....	19
Table 16. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	23
Table 17. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz).....	24
Table 18. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz).....	25
Table 19. Occupied Bandwidth Summary Results for 802.11b mode (Port 1)	28
Table 20. Occupied Bandwidth Summary Results for 802.11g mode (Port 1)	28
Table 21. Occupied Bandwidth Summary Results for 802.11n mode 20MHz (Port 1)	28
Table 22. Occupied Bandwidth Summary Results for 802.11n mode 40MHz (Port 1)	28
Table 23. Occupied Bandwidth Summary Results for 802.11n mode 20MHz (Port 2)	29
Table 24. Occupied Bandwidth Summary Results for 802.11n mode 40MHz (Port 2)	29
Table 25. Output Power Requirements from §15.247	37
Table 26. Output Power Test Results, 802.11b Mode, Port 1 – Omni Antenna.....	38
Table 27. Output Power Test Results, 802.11b Mode, Port 1 – Sector Antenna.....	38
Table 28. Output Power Test Results, 802.11b Mode, Port 1 – Panel Antenna	38
Table 29. Output Power Test Results, 802.11b Mode, Port 1 – Grid Antenna.....	38
Table 30. Output Power Test Results, 802.11g Mode, Port 1 – Omni Antenna	45
Table 31. Output Power Test Results, 802.11g Mode, Port 1 – Sector Antenna	45
Table 32. Output Power Test Results, 802.11g Mode, Port 1 – Panel Antenna	45
Table 33. Output Power Test Results, 802.11g Mode, Port 1 – Grid Antenna.....	45
Table 34. Output Power Test Results, 802.11n Mode, 20MHz, Port 1	52
Table 35. Output Power Test Results, 802.11n Mode, 40MHz, Port 1	52
Table 36. Output Power Test Results, 802.11n Mode, 20MHz, Port 2	55
Table 37. Output Power Test Results, 802.11n Mode, 40MHz, Port 2	55
Table 38. RF Output Power Results – All Ports, 802.11n mode (20MHz)	58
Table 39. Restricted Bands of Operation.....	61
Table 40. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)	62
Table 41. Radiated Harmonic Emissions Test Results, 802.11b Mode (6dBi Omni Antenna)	63
Table 42. Radiated Harmonic Emissions Test Results, 802.11b Mode (16dBi Sector Antenna).....	68
Table 43. Radiated Harmonic Emissions Test Results, 802.11b Mode (18dBi Panel Antenna)	75
Table 44. Radiated Harmonic Emissions Test Results, 802.11b Mode (25dBi Grid Antenna).....	82
Table 45. Radiated Harmonic Emissions Test Results, 802.11g Mode (6dBi Omni Antenna)	90
Table 46. Radiated Harmonic Emissions Test Results, 802.11g Mode (16dBi Sector Antenna).....	95
Table 47. Radiated Harmonic Emissions Test Results, 802.11g Mode (18dBi Panel Antenna)	102
Table 48. Radiated Harmonic Emissions Test Results, 802.11g Mode (25dBi Grid Antenna).....	110
Table 49. Radiated Harmonic Emissions Test Results, 802.11n 20MHz, All Ports (6dBi Omni Antenna)	118
Table 50. Radiated Harmonic Emissions Test Results, 802.11n 40MHz, All Ports (6dBi Omni Antenna).....	123
Table 51. Peak Power Spectral Density Test Results – 802.11b Mode Port 1	159
Table 52. Peak Power Spectral Density Test Results – 802.11g Mode Port 1	159



Table 53. Peak Power Spectral Density Test Results – 802.11n Mode Port 1 (20MHz).....	159
Table 54. Peak Power Spectral Density Test Results – 802.11n Mode Port 1 (40MHz).....	159
Table 55. Peak Power Spectral Density Test Results – 802.11n Mode Port 2 (20MHz).....	159
Table 56. Peak Power Spectral Density Test Results – 802.11n Mode Port 2 (40MHz).....	160
Table 57. Peak Power Spectral Density Test Results – 802.11n Mode All Ports (20MHz).....	160
Table 58. Peak Power Spectral Density Test Results – 802.11n Mode All Ports (40MHz).....	160

List of Plots

Plot 1. Conducted Emission, Phase Line Plot	12
Plot 2. Conducted Emission, Neutral Line Plot.....	13
Plot 3. FCC 15B Radiated Emissions Limits Test Results, 30 MHz – 1 GHz, Class A	16
Plot 4. ICES-003 Radiated Emissions Limits Test Results, 30MHz – 1GHz, Class A	17
Plot 5. FCC 15B Radiated Emissions Limits Test Results, 1GHz – 6 GHz, Class A.....	18
Plot 6. ICES-003 Radiated Emissions Limits Test Results, 1GHz – 6GHz, Class A.....	19
Plot 7. Conducted Emission, Phase Line Plot	24
Plot 8. Conducted Emission, Neutral Line Plot.....	25
Plot 9. 802.11/b Low Ch Occupied Band Width.....	30
Plot 10. 802.11/b Mid Ch Occupied Band Width.....	30
Plot 11. 802.11/b High Ch Occupied Band Width	31
Plot 12. 802.11/g Low Ch Occupied Band Width.....	31
Plot 13. 802.11/g Mid Ch Occupied Band Width.....	32
Plot 14. 802.11/g High Ch Occupied Band Width	32
Plot 15. 802.11/n 20MHz - Low Ch Occupied Band Width (Port 1)	33
Plot 16. 802.11/n 20MHz - Mid Ch Occupied Band Width (Port 1).....	33
Plot 17. 802.11/n 20MHz - High Ch Occupied Band Width (Port 1).....	34
Plot 18. 802.11/n 40MHz - Mid Ch Occupied Band Width (Port 1).....	34
Plot 19. 802.11/n 20MHz - Low Ch Occupied Band Width (Port 2)	35
Plot 20. 802.11/n 20MHz - Mid Ch Occupied Band Width (Port 2).....	35
Plot 21. 802.11/n 20MHz - High Ch Occupied Band Width (Port 2).....	36
Plot 22. 802.11/n 40MHz - Mid Ch Occupied Band Width (Port 2).....	36
Plot 23. Output Power – Low Channel 802.11b Mode, Port 1 (6dBi Omni Antenna)	39
Plot 24. Output Power – Mid Channel 802.11b Mode, Port 1 (6dBi Omni Antenna).....	39
Plot 25. Output Power – High Channel 802.11b Mode, Port 1 (6dBi Omni Antenna)	40
Plot 26. Output Power – Low Channel 802.11b Mode, Port 1 (16dBi Sector Antenna)	40
Plot 27. Output Power – Mid Channel 802.11b Mode, Port 1 (16dBi Sector Antenna).....	41
Plot 28. Output Power – High Channel 802.11b Mode, Port 1 (16dBi Sector Antenna)	41
Plot 29. Output Power – Low Channel 802.11b Mode, Port 1 (18dBi Panel Antenna)	42
Plot 30. Output Power – Mid Channel 802.11b Mode, Port 1 (18dBi Panel Antenna).....	42
Plot 31. Output Power – High Channel 802.11b Mode, Port 1 (18dBi Panel Antenna).....	43
Plot 32. Output Power – Low Channel 802.11b Mode, Port 1 (25dBi Grid Antenna).....	43
Plot 33. Output Power – Mid Channel 802.11b Mode, Port 1 (25dBi Grid Antenna).....	44
Plot 34. Output Power – High Channel 802.11b Mode, Port 1 (25dBi Grid Antenna)	44
Plot 35. Output Power – Low Channel 802.11g Mode, Port 1 (6dBi Omni Antenna)	46
Plot 36. Output Power – Mid Channel 802.11g Mode, Port 1 (6dBi Omni Antenna).....	46
Plot 37. Output Power – High Channel 802.11g Mode, Port 1 (6dBi Omni Antenna)	47
Plot 38. Output Power – Low Channel 802.11g Mode, Port 1 (16dBi Sector Antenna)	47
Plot 39. Output Power – Mid Channel 802.11g Mode, Port 1 (16dBi Sector Antenna).....	48
Plot 40. Output Power – High Channel 802.11g Mode, Port 1 (16dBi Sector Antenna)	48
Plot 41. Output Power – Low Channel 802.11g Mode, Port 1 (18dBi Panel Antenna)	49
Plot 42. Output Power – Mid Channel 802.11g Mode, Port 1 (18dBi Panel Antenna).....	49
Plot 43. Output Power – High Channel 802.11g Mode, Port 1 (18dBi Panel Antenna).....	50
Plot 44. Output Power – Low Channel 802.11g Mode, Port 1 (25dBi Grid Antenna)	50
Plot 45. Output Power – Mid Channel 802.11g Mode, Port 1 (25dBi Grid Antenna).....	51
Plot 46. Output Power – High Channel 802.11g Mode, Port 1 (25dBi Grid Antenna)	51



Plot 47. Output Power – Low Channel 802.11n Mode, Port 1 (20MHz)	53
Plot 48. Output Power – Mid Channel 802.11n Mode, Port 1 (20MHz)	53
Plot 49. Output Power – High Channel 802.11n Mode, Port 1 (20MHz)	54
Plot 50. Output Power – Mid Channel 802.11n Mode, Port 1 (40MHz)	54
Plot 51. Output Power – Low Channel 802.11n Mode, Port 2 (20MHz)	56
Plot 52. Output Power – Mid Channel 802.11n Mode, Port 2 (20MHz)	56
Plot 53. Output Power – High Channel 802.11n Mode, Port 2 (20MHz)	57
Plot 54. Output Power – Mid Channel 802.11n Mode, Port 2 (40MHz)	57
Plot 55. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11b 6dBi Omni Antenna	64
Plot 56. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11b 6dBi Omni Antenna	64
Plot 57. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11b 6dBi Omni Antenna	65
Plot 58. Radiated Restricted Band Edge, Low Channel Peak– 802.11b 6dBi Omni Antenna	66
Plot 59. Radiated Restricted Band Edge, Low Channel Avg– 802.11b 6dBi Omni Antenna	66
Plot 60. Radiated Restricted Band Edge, High Channel Peak– 802.11b 6dBi Omni Antenna	67
Plot 61. Radiated Restricted Band Edge, High Channel Avg– 802.11b 6dBi Omni Antenna	67
Plot 62. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11b 16dBi Sector Antenna	69
Plot 63. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11b 16dBi Sector Antenna	69
Plot 64. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11b 16dBi Sector Antenna	70
Plot 65. Radiated Restricted Band Edge, Channel 1 Peak– 802.11b 16dBi Sector Antenna (Lower Power)	71
Plot 66. Radiated Restricted Band Edge, Channel 1 Avg.– 802.11b 16dBi Sector Antenna (Lower Power)	71
Plot 67. Radiated Restricted Band Edge, Channel 12 Peak– 802.11b 16dBi Sector Antenna (Lower Power)	72
Plot 68. Radiated Restricted Band Edge, Channel 12 Avg.– 802.11b 16dBi Sector Antenna (Lower Power)	72
Plot 69. Radiated Restricted Band Edge, Channel 2 Peak– 802.11b 16dBi Sector Antenna (Higher Power)	73
Plot 70. Radiated Restricted Band Edge, Channel 2 Avg.– 802.11b 16dBi Sector Antenna (Higher Power)	73
Plot 71. Radiated Restricted Band Edge, Channel 11 Peak– 802.11b 16dBi Sector Antenna (Higher Power)	74
Plot 72. Radiated Restricted Band Edge, Channel 11 Avg.– 802.11b 16dBi Sector Antenna (Higher Power)	74
Plot 73. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11b 18dBi Panel Antenna	76
Plot 74. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11b 18dBi Panel Antenna	76
Plot 75. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11b 18dBi Panel Antenna	77
Plot 76. Radiated Restricted Band Edge, Channel 1 Peak– 802.11b 18dBi Panel Antenna (Lower Power)	78
Plot 77. Radiated Restricted Band Edge, Channel 1 Avg.– 802.11b 18dBi Panel Antenna (Lower Power)	78
Plot 78. Radiated Restricted Band Edge, Channel 12 Peak– 802.11b 18dBi Panel Antenna (Lower Power)	79
Plot 79. Radiated Restricted Band Edge, Channel 12 Avg.– 802.11b 18dBi Panel Antenna (Lower Power)	79
Plot 80. Radiated Restricted Band Edge, Channel 2 Peak– 802.11b 18dBi Panel Antenna (Higher Power)	80
Plot 81. Radiated Restricted Band Edge, Channel 2 Avg.– 802.11b 18dBi Panel Antenna (Higher Power)	80
Plot 82. Radiated Restricted Band Edge, Channel 11 Peak– 802.11b 18dBi Panel Antenna (Higher Power)	81
Plot 83. Radiated Restricted Band Edge, Channel 11 Avg.– 802.11b 18dBi Panel Antenna (Higher Power)	81
Plot 84. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11b 25dBi Grid Antenna	83
Plot 85. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11b 25dBi Grid Antenna	83
Plot 86. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11b 25dBi Grid Antenna	84
Plot 87. Radiated Restricted Band Edge, Channel 1 Peak– 802.11b 25dBi Grid Antenna (Lower Power)	85
Plot 88. Radiated Restricted Band Edge, Channel 1 Avg.– 802.11b 25dBi Grid Antenna (Lower Power)	85
Plot 89. Radiated Restricted Band Edge, Channel 12 Peak– 802.11b 25dBi Grid Antenna (Lower Power)	86
Plot 90. Radiated Restricted Band Edge, Channel 12 Avg.– 802.11b 25dBi Grid Antenna (Lower Power)	86
Plot 91. Radiated Restricted Band Edge, Channel 2 Peak– 802.11b 25dBi Grid Antenna (Higher Power)	87
Plot 92. Radiated Restricted Band Edge, Channel 2 Avg.– 802.11b 25dBi Grid Antenna (Higher Power)	87
Plot 93. Radiated Restricted Band Edge, Channel 11 Peak– 802.11b 25dBi Grid Antenna (Higher Power)	88
Plot 94. Radiated Restricted Band Edge, Channel 11 Avg.– 802.11b 25dBi Grid Antenna (Higher Power)	88
Plot 95. Radiated Restricted Band Edge, Mid Channel Peak– 802.11b 25dBi Grid Antenna	89
Plot 96. Radiated Restricted Band Edge, Mid Channel Avg– 802.11b 25dBi Grid Antenna	89
Plot 97. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11g 6dBi Omni Antenna	91
Plot 98. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11g 6dBi Omni Antenna	91
Plot 99. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11g 6dBi Omni Antenna	92
Plot 100. Radiated Restricted Band Edge, Low Channel Peak– 802.11g 6dBi Omni Antenna	93
Plot 101. Radiated Restricted Band Edge, Low Channel Avg– 802.11g 6dBi Omni Antenna	93
Plot 102. Radiated Restricted Band Edge, High Channel Peak– 802.11g 6dBi Omni Antenna	94



Plot 103. Radiated Restricted Band Edge, High Channel Avg– 802.11g 6dBi Omni Antenna.....	94
Plot 104. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11g 16dBi Sector Antenna	96
Plot 105. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11g 16dBi Sector Antenna	96
Plot 106. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11g 16dBi Sector Antenna.....	97
Plot 107. Radiated Restricted Band Edge, Low Channel Peak– 802.11g 16dBi Sector Antenna	98
Plot 108. Radiated Restricted Band Edge, Low Channel Avg– 802.11g 16dBi Sector Antenna	98
Plot 109. Radiated Restricted Band Edge, High Channel Peak– 802.11g 16dBi Sector Antenna.....	99
Plot 110. Radiated Restricted Band Edge, High Channel Avg– 802.11g 16dBi Sector Antenna.....	99
Plot 111. Radiated Restricted Band Edge, Channel 2, (2417MHz) Peak– 802.11g 16dBi Sector Antenna	100
Plot 112. Radiated Restricted Band Edge, Channel 2 (2417MHz) Avg– 802.11g 16dBi Sector Antenna.....	100
Plot 113. Radiated Restricted Band Edge, Channel 10 (2457MHz) Peak– 802.11g 16dBi Sector Antenna.....	101
Plot 114. Radiated Restricted Band Edge, Channel 10 (2457MHz) Avg– 802.11g 16dBi Sector Antenna.....	101
Plot 115. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11g 18dBi Panel Antenna.....	103
Plot 116. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11g 18dBi Panel Antenna	103
Plot 117. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11g 18dBi Panel Antenna	104
Plot 118. Radiated Restricted Band Edge, Channel 1 Peak– 802.11g 18dBi Panel Antenna (Lower Power).....	105
Plot 119. Radiated Restricted Band Edge, Channel 1 Avg.– 802.11g 18dBi Panel Antenna (Lower Power).....	105
Plot 120. Radiated Restricted Band Edge, Channel 12 Peak– 802.11g 18dBi Panel Antenna (Lower Power).....	106
Plot 121. Radiated Restricted Band Edge, Channel 12 Avg.– 802.11g 18dBi Panel Antenna (Lower Power).....	106
Plot 122. Radiated Restricted Band Edge, Channel 2 Peak– 802.11g 18dBi Panel Antenna (Higher Power)	107
Plot 123. Radiated Restricted Band Edge, Channel 2 Avg.– 802.11g 18dBi Panel Antenna (Higher Power)	107
Plot 124. Radiated Restricted Band Edge, Channel 11 Peak– 802.11g 18dBi Panel Antenna (Higher Power)	108
Plot 125. Radiated Restricted Band Edge, Channel 11 Avg.– 802.11g 18dBi Panel Antenna (Higher Power)	108
Plot 126. Radiated Restricted Band Edge, Mid Channel Peak– 802.11g 18dBi Panel Antenna	109
Plot 127. Radiated Restricted Band Edge, Mid Channel Avg– 802.11g 18dBi Panel Antenna	109
Plot 128. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11g 25dBi Grid Antenna	111
Plot 129. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11g 25dBi Grid Antenna	111
Plot 130. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11g 25dBi Grid Antenna.....	112
Plot 131. Radiated Restricted Band Edge, Channel 1 Peak– 802.11g 25dBi Grid Antenna (Lower Power)	113
Plot 132. Radiated Restricted Band Edge, Channel 1 Avg.– 802.11g 25dBi Grid Antenna (Lower Power)	113
Plot 133. Radiated Restricted Band Edge, Channel 12 Peak– 802.11g 25dBi Grid Antenna (Lower Power)	114
Plot 134. Radiated Restricted Band Edge, Channel 12 Avg.– 802.11g 25dBi Grid Antenna (Lower Power)	114
Plot 135. Radiated Restricted Band Edge, Channel 2 Peak– 802.11g 25dBi Grid Antenna (Higher Power)	115
Plot 136. Radiated Restricted Band Edge, Channel 2 Avg.– 802.11g 25dBi Grid Antenna (Higher Power)	115
Plot 137. Radiated Restricted Band Edge, Channel 11 Peak– 802.11g 25dBi Grid Antenna (Higher Power)	116
Plot 138. Radiated Restricted Band Edge, Channel 11 Avg.– 802.11g 25dBi Grid Antenna (Higher Power)	116
Plot 139. Radiated Restricted Band Edge, Mid Channel Peak– 802.11g 25dBi Grid Antenna	117
Plot 140. Radiated Restricted Band Edge, Mid Channel Avg– 802.11g 25dBi Grid Antenna	117
Plot 141. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11n 20MHz, All Ports (6dBi Omni Antenna)....	119
Plot 142. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11n 20MHz, All Ports (6dBi Omni Antenna)	119
Plot 143. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11n 20MHz, All Ports (6dBi Omni Antenna)....	120
Plot 144. Radiated Restricted Band Edge, Low Channel Peak– 802.11n 20MHz, All Ports, 6dBi Omni Antenna	121
Plot 145. Radiated Restricted Band Edge, Low Channel Avg– 802.11n 20MHz, All Ports, 6dBi Omni Antenna	121
Plot 146. Radiated Restricted Band Edge, High Channel Peak– 802.11n 20MHz, All Ports, 6dBi Omni Antenna	122
Plot 147. Radiated Restricted Band Edge, High Channel Avg– 802.11n 20MHz, All Ports, 6dBi Omni Antenna	122
Plot 148. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11n 40MHz, All Ports (6dBi Omni Antenna)	123
Plot 149. Radiated Restricted Band Edge, Mid Channel Peak– 802.11n 40MHz, All Ports, 6dBi Omni Antenna.....	124
Plot 150. Radiated Restricted Band Edge, Mid Channel Avg– 802.11n 40MHz, All Ports, 6dBi Omni Antenna.....	124
Plot 151. Radiated Restricted Band Edge, Mid Channel Peak– 802.11n 40MHz, All Ports, 6dBi Omni Antenna (2300MHz).....	125
Plot 152. Radiated Restricted Band Edge, Mid Channel Avg– 802.11n 40MHz, All Ports, 6dBi Omni Antenna (2300MHz)	125
Plot 153. Radiated Restricted Band Edge, Mid Channel Peak– 802.11n 40MHz, All Ports, 6dBi Omni Antenna (2600MHz).....	126
Plot 154. Radiated Restricted Band Edge, Mid Channel Avg– 802.11n 40MHz, All Ports, 6dBi Omni Antenna (2600MHz)	126



Plot 155. 802.11/b – Low Channel Conducted Emissions 30MHz - 1GHz	131
Plot 156. 802.11/b – Low Channel Conducted Emissions 1-18GHz.....	131
Plot 157. 802.11/b – Low Channel Conducted Emissions 18-26GHz.....	132
Plot 158. 802.11/b – Mid Channel Conducted Emissions 30MHz - 1GHz	132
Plot 159. 802.11/b – Mid Channel Conducted Emissions 1-18GHz	133
Plot 160. 802.11/b – Mid Channel Conducted Emissions 18-26GHz	133
Plot 161. 802.11/b – High Channel Conducted Emissions 30MHz - 1GHz.....	134
Plot 162. 802.11/b – High Channel Conducted Emissions 1-18GHz.....	134
Plot 163. 802.11/b – High Channel Conducted Emissions 18-26GHz.....	135
Plot 164. 802.11/g – Low Channel Conducted Emissions 30MHz - 1GHz	136
Plot 165. 802.11/g – Low Channel Conducted Emissions 1-18GHz.....	136
Plot 166. 802.11/g – Low Channel Conducted Emissions 18-26GHz.....	137
Plot 167. 802.11/g – Mid Channel Conducted Emissions 30MHz - 1GHz	137
Plot 168. 802.11/g – Mid Channel Conducted Emissions 1-18GHz	138
Plot 169. 802.11/g – Mid Channel Conducted Emissions 18-26GHz	138
Plot 170. 802.11/g – High Channel Conducted Emissions 30MHz - 1GHz.....	139
Plot 171. 802.11/g – High Channel Conducted Emissions 1-18GHz	139
Plot 172. 802.11/g – High Channel Conducted Emissions 18-26GHz	140
Plot 173. 802.11/n 20MHz – Low Channel Conducted Emissions 30MHz - 1GHz (Port 1)	141
Plot 174. 802.11/n 20MHz – Low Channel Conducted Emissions 1-18GHz (Port 1)	141
Plot 175. 802.11/n 20MHz – Low Channel Conducted Emissions 18-26GHz (Port 1)	142
Plot 176. 802.11/n 20MHz – Mid Channel Conducted Emissions 30MHz - 1GHz (Port 1).....	142
Plot 177. 802.11/n 20MHz – Mid Channel Conducted Emissions 1-18GHz (Port 1)	143
Plot 178. 802.11/n 20MHz – Mid Channel Conducted Emissions 18-26GHz (Port 1).....	143
Plot 179. 802.11/n 20MHz – High Channel Conducted Emissions 30MHz - 1GHz (Port 1)	144
Plot 180. 802.11/n 20MHz – High Channel Conducted Emissions 1-18GHz (Port 1).....	144
Plot 181. 802.11/n 20MHz – High Channel Conducted Emissions 18-26GHz (Port 1).....	145
Plot 182. 802.11/n 40MHz – Mid Channel Conducted Emissions 30MHz - 1GHz (Port 1).....	146
Plot 183. 802.11/n 40MHz – Mid Channel Conducted Emissions 1-18GHz (Port 1)	146
Plot 184. 802.11/n 40MHz – Mid Channel Conducted Emissions 18-26GHz (Port 1)	147
Plot 185. 802.11/n 20MHz – Low Channel Conducted Emissions 30MHz - 1GHz (Port 2)	148
Plot 186. 802.11/n 20MHz – Low Channel Conducted Emissions 1-18GHz (Port 2)	148
Plot 187. 802.11/n 20MHz – Low Channel Conducted Emissions 18-26GHz (Port 2)	149
Plot 188. 802.11/n 40MHz – Mid Channel Conducted Emissions 30MHz - 1GHz (Port 2)	150
Plot 189. 802.11/n 40MHz – Mid Channel Conducted Emissions 1-18GHz (Port 2)	150
Plot 190. 802.11/n 40MHz – Mid Channel Conducted Emissions 18-26GHz (Port 2)	151
Plot 191. 802.11/b – Lower Band Edge	152
Plot 192. 802.11/b –Upper Band Edge	152
Plot 193. 802.11/g – Lower Band Edge	153
Plot 194. 802.11/g – Lower Band Edge	153
Plot 195. 802.11/n 20MHz – Lower Band Edge (Port 1)	154
Plot 196. 802.11/n 20MHz –Upper Band Edge (Port 1)	154
Plot 197. 802.11/n 40MHz – Mid Channel Lower Band Edge (Port 1)	155
Plot 198. 802.11/n 40MHz – Mid Channel Upper Band Edge (Port 1)	155
Plot 199. 802.11/n 20MHz – Lower Band Edge (Port 2)	156
Plot 200. 802.11/n 20MHz –Upper Band Edge (Port 2)	156
Plot 201. 802.11/n 40MHz – Lower Band Edge (Port 2)	157
Plot 202. 802.11/n 40MHz –Upper Band Edge (Port 2)	157
Plot 203. 802.11/b – Low Ch Peak Power Spectral Density	161
Plot 204. 802.11/b – Low Ch Peak Power Spectral Density Determination	161
Plot 205. 802.11/b – Mid Ch Peak Power Spectral Density	162
Plot 206. 802.11/b – Mid Ch Peak Power Spectral Density Determination	162
Plot 207. 802.11/b – High Ch Peak Power Spectral Density	163
Plot 208. 802.11/b – High Ch Peak Power Spectral Density Determination	163
Plot 209. 802.11/g – Low Ch Peak Power Spectral Density	164
Plot 210. 802.11/g – Low Ch Peak Power Spectral Density Determination	164



Plot 211. 802.11/g – Mid Ch Peak Power Spectral Density	165
Plot 212. 802.11/g – Mid Ch Peak Power Spectral Density Determination	165
Plot 213. 802.11/g – High Ch Peak Power Spectral Density.....	166
Plot 214. 802.11/g – High Ch Peak Power Spectral Density Determination.....	166
Plot 215. 802.11/n 20MHz– Low Ch Peak Power Spectral Density (Port 1).....	167
Plot 216. 802.11/n 20MHz– Low Ch Peak Power Spectral Density Determination (Port 1).....	167
Plot 217. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density (Port 1).....	168
Plot 218. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density Determination (Port 1).....	168
Plot 219. 802.11/n 20MHz– High Ch Peak Power Spectral Density (Port 1)	169
Plot 220. 802.11/n 20MHz– High Ch Peak Power Spectral Density Determination (Port 1)	169
Plot 221. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density (Port 1).....	170
Plot 222. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density Determination (Port 1).....	170
Plot 223. 802.11/n 20MHz– Low Ch Peak Power Spectral Density (Port 2).....	171
Plot 224. 802.11/n 20MHz– Low Ch Peak Power Spectral Density Determination (Port 2)	171
Plot 225. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density (Port 2).....	172
Plot 226. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density Determination (Port 2).....	172
Plot 227. 802.11/n 20MHz– High Ch Peak Power Spectral Density (Port 2)	173
Plot 228. 802.11/n 20MHz– High Ch Peak Power Spectral Density Determination (Port 2)	173
Plot 229. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density (Port 2).....	174
Plot 230. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density Determination (Port 2)	174
Plot 231. 802.11/n 20MHz– Low Ch Peak Power Spectral Density (All Ports)	175
Plot 232. 802.11/n 20MHz– Low Ch Peak Power Spectral Density Determination (All Ports)	175
Plot 233. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density (All Ports).....	176
Plot 234. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density Determination (All Ports)	176
Plot 235. 802.11/n 20MHz– High Ch Peak Power Spectral Density (All Ports).....	177
Plot 236. 802.11/n 20MHz– High Ch Peak Power Spectral Density Determination (All Ports).....	177
Plot 237. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density (All Ports)	178
Plot 238. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density Determination (All Ports)	178

List of Figures

Figure 1. Block Diagram of Test Configuration.....	7
--	---

List of Photographs

Photograph 1. Ubiquiti Networks M2	6
Photograph 2. Conducted Emissions Test Setup	14
Photograph 3. Radiated Emission Test Setup 30 MHz - 1 GHz.....	20
Photograph 4. Radiated Emission Test Setup 1GHz - 6 GHz	20
Photograph 5. Conducted Emissions Test Setup	26
Photograph 6. Test Equipment and setup for various Radiated Measurements – 6dBi Omni Antenna	127
Photograph 7. Test Equipment and setup for various Radiated Measurements – 16dBi Sector Antenna	128
Photograph 8. Test Equipment and setup for Various Radiated Measurements – 18dBi Panel Antenna.....	128
Photograph 9. Test Equipment and setup for various Radiated Measurements – 25dBi Grid Antenna	129
Photograph 10. Test Equipment and setup for various Radiated Measurements – Combined Omni Antennas	129



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
d	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current μ
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
f	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μs	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Ubiquiti Networks M2, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the M2. Ubiquiti Networks should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the M2, has been **permanently** discontinued

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Ubiquiti Networks, purchase order number 904016. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	IC Reference	Description	Compliance
47 CFR Part 15.247:2005	RSS-210 Issue 6: 2005	Applicable Standard	Compliant
Title 47 of the CFR, Part 15 §15.203	N/A	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.205	RSS-210(A8.5)	Emissions at Restricted Band	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-210(7.2.2)	Conducted Emission Voltage	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RSS-210(A8.1)	Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-210(A8.4)	RF Output Power	Compliant
Title 47 of the CFR, Part 15 §15.247(c)	RSS-210(A8.4)	Antenna Gain >6dBi	Compliant
Title 47 of the CFR, Part 15 §15.209, §15.247(d)	RSS-210(A8.5)	Radiated and Conducted Spurious Emissions	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	RSS-210(A8.3)	Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(f)	RSS-210(A8.3)	Hybrid System Requirements	N/A
Title 47 of the CFR, Part 15 §15.247(g)	RSS-210(A8.1)	Hopping Capability	N/A
Title 47 of the CFR, Part 15 §15.247(h)	RSS-210(A8.1)	Hopping Coordination Requirement	N/A
Title 47 of the CFR, Part 15 §15.247(i)	RSS-Gen(5.5)	Maximum Permissible Exposure	Compliant
N/A	RSS-Gen(4.8)	Receiver Spurious Emissions	Compliant

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by Ubiquiti Networks to perform testing on the M2, under Ubiquiti Networks's purchase order number 904016.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Ubiquiti Networks, M2.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	M2				
Model(s) Covered:	M2				
EUT Specifications:	Primary Power: 120 VAC, 60 Hz				
	FCC ID: SWX-M2 IC: 6545A-M2				
	Type of Modulations:	DSSS (Direct Sequence Spread Spectrum) OFDM (Orthogonal Frequency Division multiplexing)			
	Emission Designators:			6dB	99%
		802.11b:	12M0D7D		15M7D7D
		802.11g:	16M3D7D		16M7D7D
		802.11n 20MHz:	17M4D7D		17M7D7D
		802.11n 40MHz:	36M1D7D		36M2D7D
	Equipment Code:	DTS			
	Peak RF Output Power:		802.11b (dBm)	802.11g (dBm)	802.11n 20MHz
		Omni:	25.67	29.71	26.86dBm
		Sector:	15.39	19.81	
		Panel:	15.12	20.59	26.42dBm
		Grid:	11.17	16.83	
EUT Frequency Ranges: 2412-2462MHz					
Analysis:	The results obtained relate only to the item(s) tested.				
Environmental Test Conditions:	Temperature: 15-35° C				
	Relative Humidity: 30-60%				
	Barometric Pressure: 860-1060 mbar				
Evaluated by:	Anderson Soungpanya				
Date(s):	April 20, 21, 23, 2009 & May 7, 2009 & June 25, 2009				

Table 2. EUT Summary Table

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
RSS-210, Issue 7, June 2007	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ICES-003, Issue 4 February 2004	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick Street, Santa Clara, California 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Ubiquiti Networks M2, is a 2GHz, 802.11b/gn MIMO 2X2 Outdoor radio.



Photograph 1. Ubiquiti Networks M2

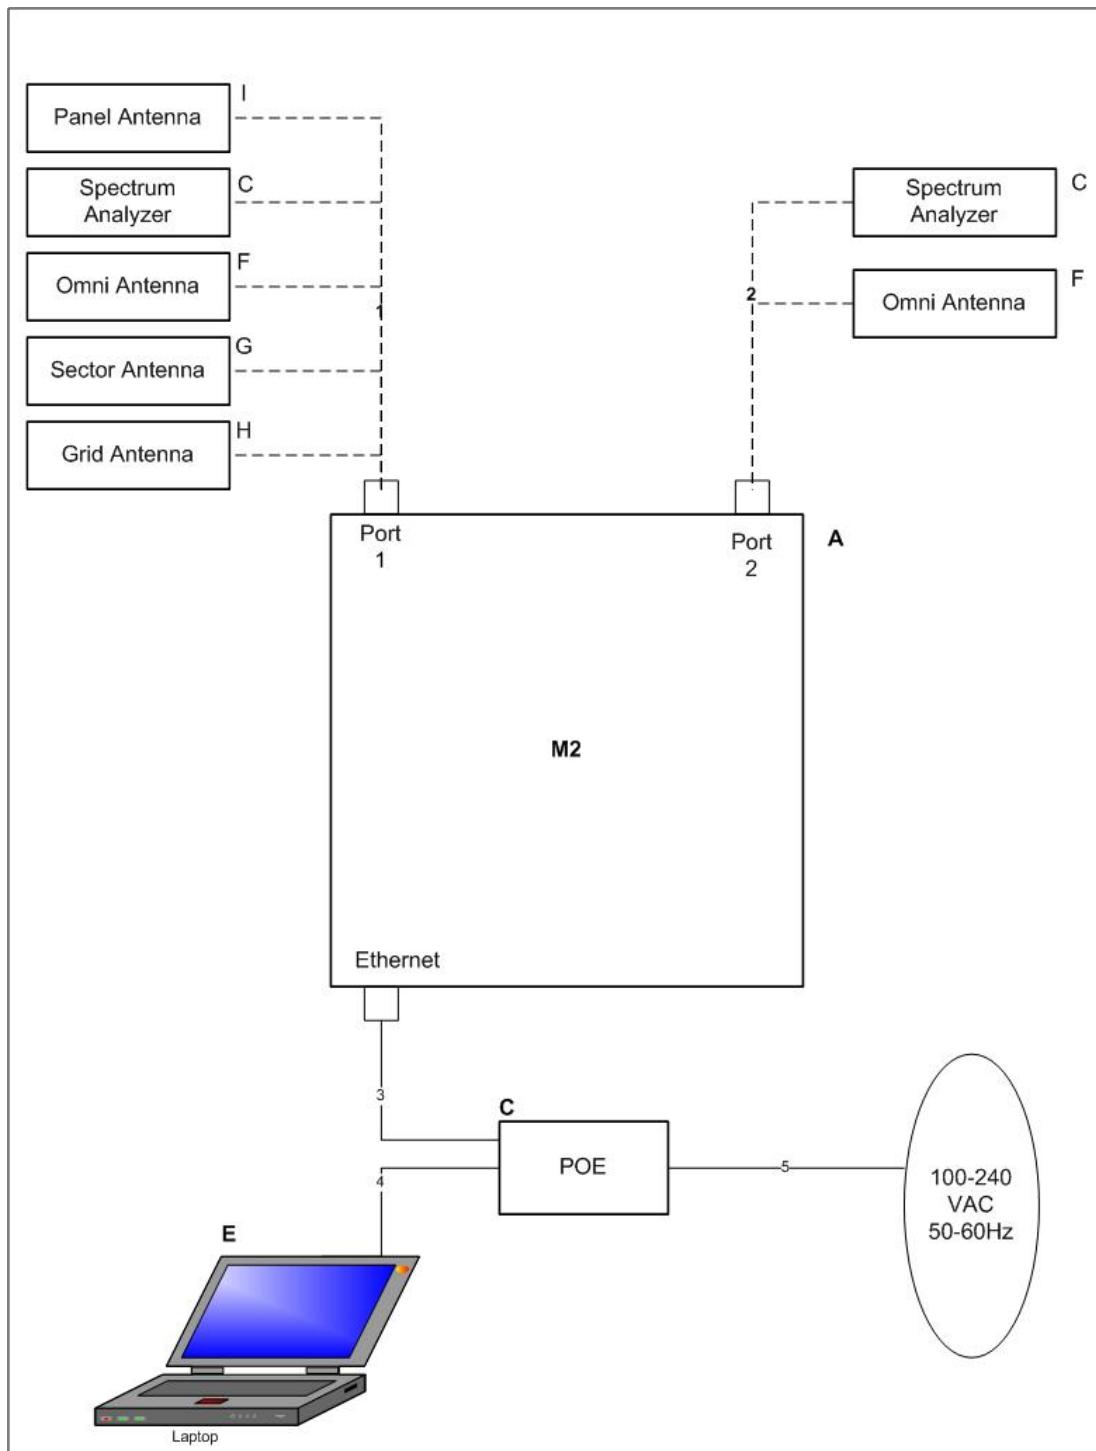


Figure 1. Block Diagram of Test Configuration

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number
A	M2	M2	M2	4-16-09
C	POE	UB1-POE-15-8	NA	0901-0004848

Table 4. Equipment Configuration

F. Support Equipment

Ubiquiti Networks supplied support equipment necessary for the operation and testing of the M2. All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
M2				
N	SPECTRUM ANALYZER	AGILENT	E4447A	NA
E	LAPTOP	DELL	VOSTRO 1000	NA
F	OMNI ANTENNAS	UBIQUITI NETWORKS	O-2G-6	NA
G	SECTOR ANTENNA	UBIQUITI NETWORKS	AMS-2G-16	NA
H	GRID ANTENNA	UBIQUITI NETWORKS	AG-2G-25	NA
I	PANEL ANTENNA	UBIQUITI NETWORKS	RP-2G-18	NA

Table 5. Support Equipment

* The ‘Customer Supplied Calibration Data’ column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

** The AC/DC Adapter was use to power the EUT for testing purpose only, will not be sold with radio.

G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port Name
M2						
1	A, ANTENNA PORT1	COAXIAL CABLE	1	.1	Y	F OR G OR H OR I
2	A, ANTENNA PORT2	COAXIAL CABLE	1	.1	Y	F OR G OR H OR I
3	A, ETHERNET	CAT 5	1	.5	Y	C
4	C, DATA	CAT 5	1	.5	N	E, LAPTOP
5	C, POE	POWER CORD	1	.5	N	100-240V AC POWER

Table 6. Ports and Cabling Information

H. Mode of Operation

The M2 uses Atheros Radio Test Software.

I. Method of Monitoring EUT Operation

A Spectrum Analyzer and a Power Meter was used to monitor the EUT's transmitter channel and power output.

J. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Ubiquiti Networks upon completion of testing.

III. Electromagnetic Compatibility Criteria for Unintentional Radiators

Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

15.207(a). Except as shown in paragraphs (b) and (c) of this section*, charging, AC adapters or battery eliminators the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the Table 7, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency range (MHz)	Class A Conducted Limits (dB μ V)		*Class B Conducted Limits (dB μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.
 Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.
 * -- Limits per Subsection 15.207(a).

Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)


Test Results: The EUT was found compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s): Anderson Soungpanya

Test Date(s): 04/23/09

Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Results QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG	Results AVG
.413	47.4	79	-31.6	Pass	37.94	66	-28.06	Pass
26.60	38.44	73	-34.56	Pass	36.34	60	-23.66	Pass
.423	44.45	79	-34.55	Pass	26.64	66	-39.36	Pass

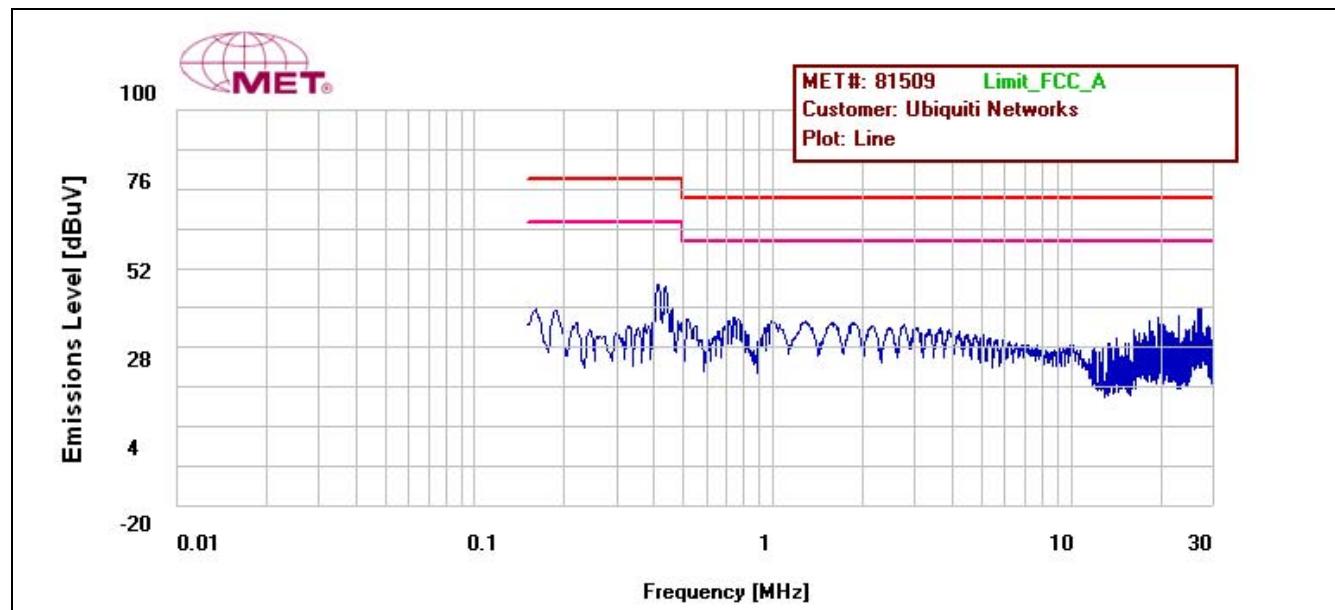Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

Plot 1. Conducted Emission, Phase Line Plot

Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Results QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG	Results AVG
.168	35.55	79	-43.45	Pass	22.23	66	-43.77	Pass
.414	48.14	79	-30.86	Pass	37.89	66	-28.11	Pass
.421	45.21	79	-33.79	Pass	27.89	66	-38.11	Pass

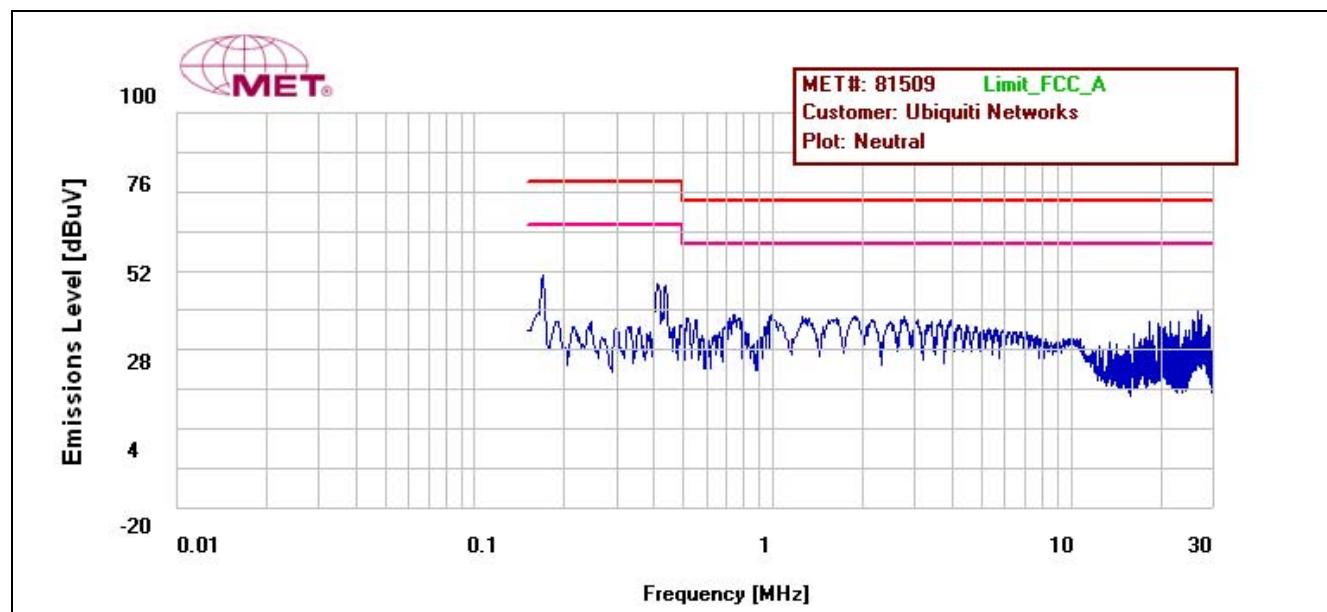Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)



Plot 2. Conducted Emission, Neutral Line Plot

Conducted Emission Limits Test Setup

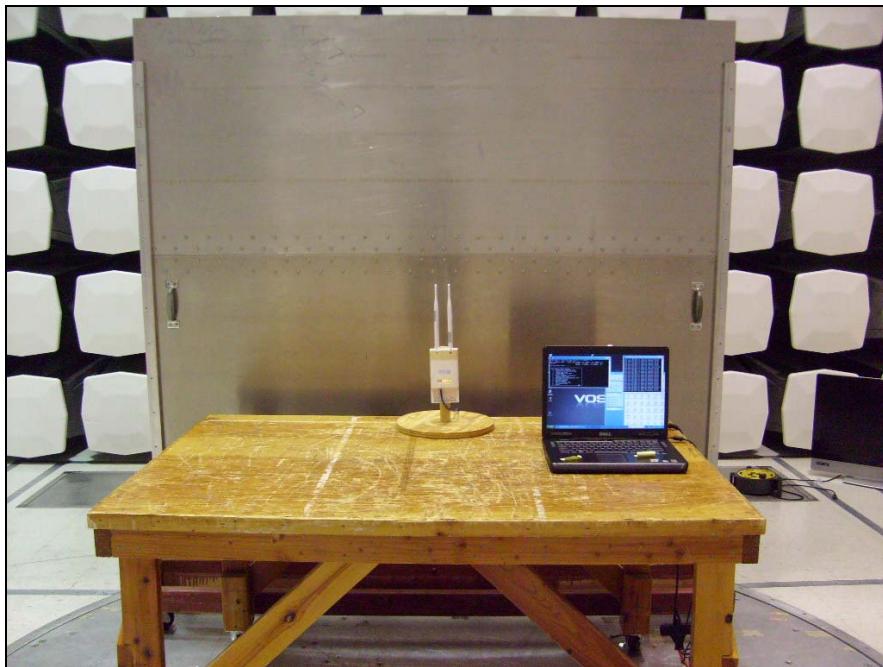

Photograph 2. Conducted Emissions Test Setup

Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s):

15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 10.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Frequency Band (MHz)	Class A Quasi-Peak limits 10 m measurement distance (dB μ V/m)	Class B Quasi-Peak limits 10 m measurement distance (dB μ V/m)
30 to 230	40	30
230 to 1000	47	37

Table 11. Radiated Emissions Limits calculated from ICES-003 Issue 4 February 2004

Test Procedures:

The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 10 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results:

The EUT was found to comply with the Class A requirement(s) of this section. Measured emissions were below applicable limits

Test Engineer(s):


Anderson Soungpanya

Test Date(s):

04/23/09

FCC 15B Radiated Emissions Limits Test Results, Class A


Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
43.76	V	128	100	66.26	9.52	40	1.026	36.806	39	-2.194
88.84	V	210	100	62.43	9.538	40	1.502	33.47	43.5	-10.03
137.17	V	95	100	53.44	11.283	40	1.877	26.6	43.5	-16.9
343.63	V	170	100	48.26	14.573	40	3.016	25.849	46.4	-20.551
599.66	H	337	156	46.87	18.427	40	4.059	29.356	46.4	-17.044
799.97	H	220	100	45.5	19.501	40	4.755	29.756	46.4	-16.644

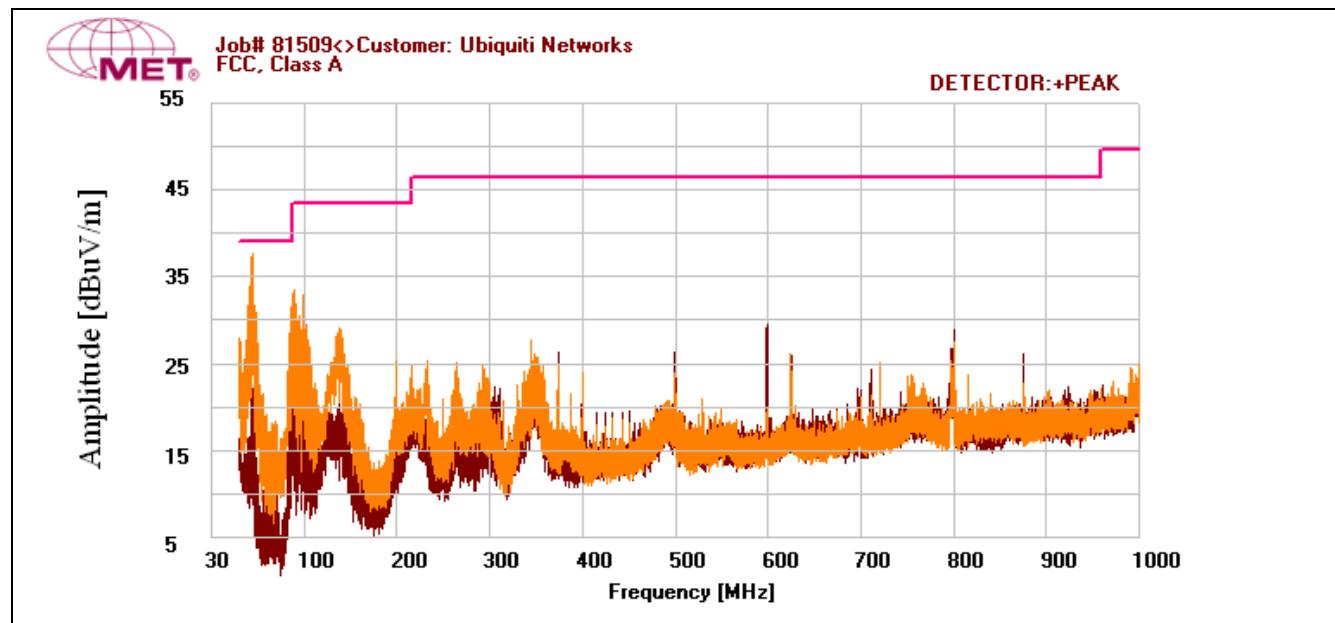Table 12. FCC 15B Radiated Emissions Limits Test Results, 30 MHz – 1GHz

Plot 3. FCC 15B Radiated Emissions Limits Test Results, 30 MHz – 1 GHz, Class A

Industry Canada ICES-003 Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
43.76	V	128	100	66.26	9.52	40	1.026	36.806	40	-3.194
88.84	V	210	100	62.43	9.538	40	1.502	33.47	40	-6.53
137.17	V	95	100	53.44	11.283	40	1.877	26.6	40	-13.4
343.63	V	170	100	48.26	14.573	40	3.016	25.849	47	-21.151
599.66	H	337	156	46.87	18.427	40	4.059	29.356	47	-17.644
799.97	H	220	100	45.5	19.501	40	4.755	29.756	47	-17.244

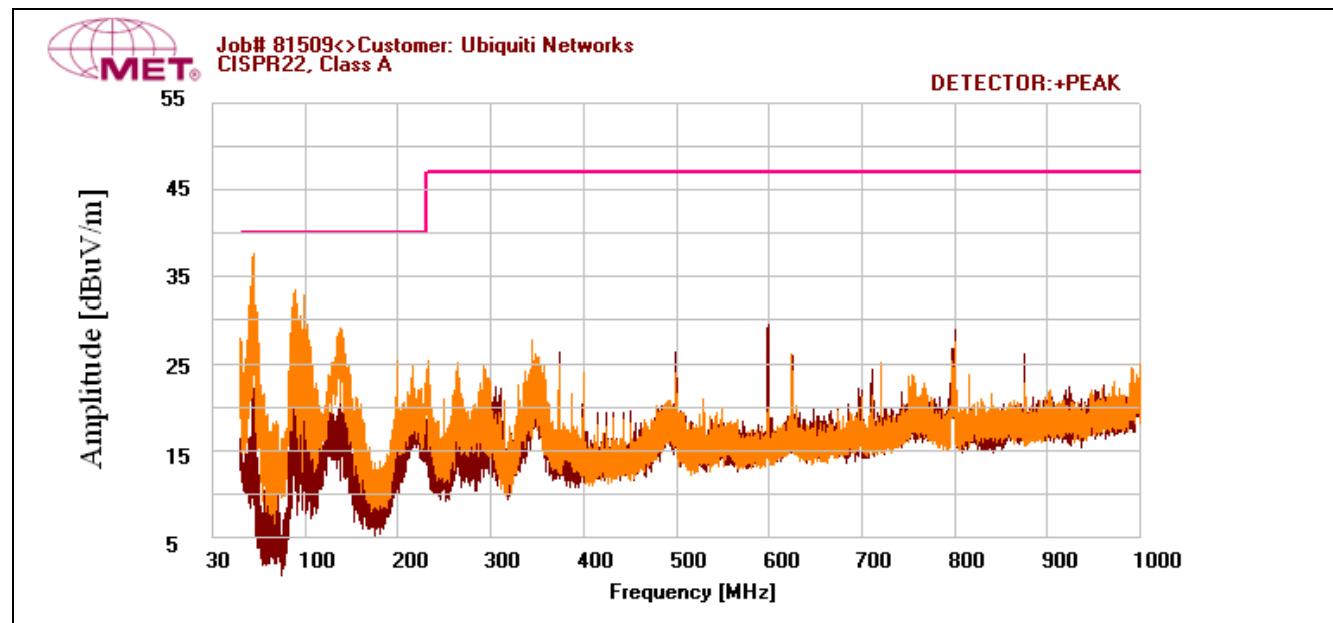Table 13. ICES-003 Radiated Emissions Limits Test Results, 30MHz – 1GHz




Plot 4. ICES-003 Radiated Emissions Limits Test Results, 30MHz – 1GHz, Class A

FCC 15B Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
2494	V	0	100	37.92	1.908	20	2.931	-10.46	12.299	49.5	-37.201
1270	H	16	100	46.65	-2.401	20	1.638	-10.46	15.427	49.5	-34.073

Table 14. FCC 15B Radiated Emissions Limits Test Results, 1GHz – 6GHz

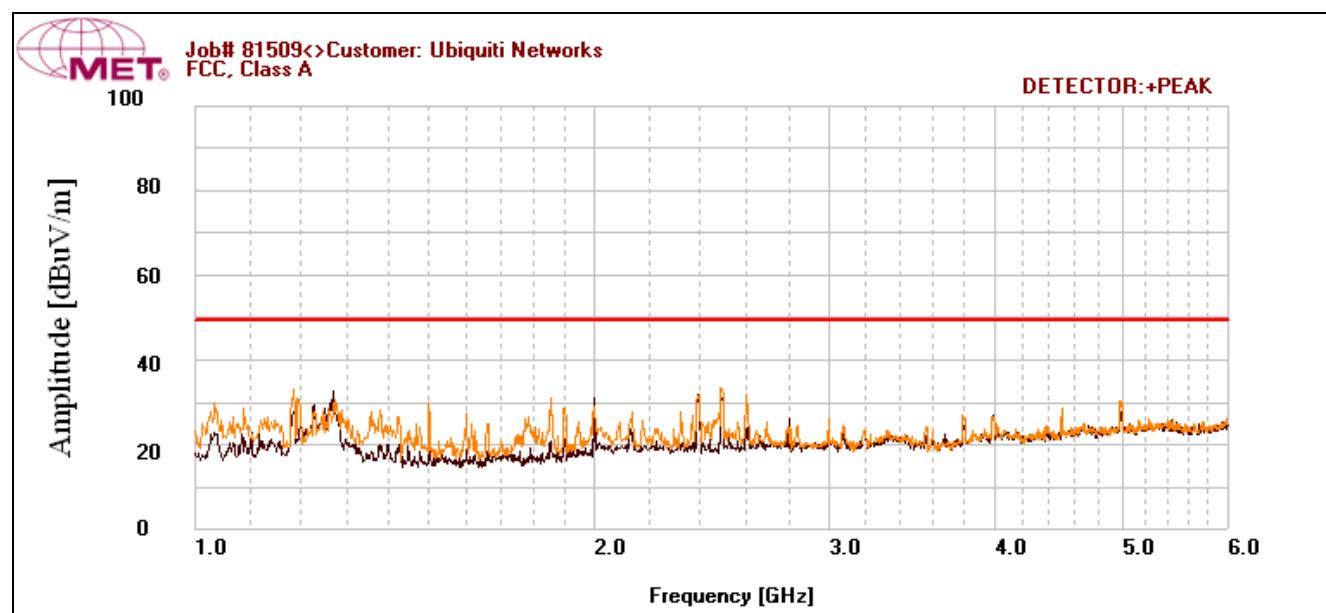


Plot 5. FCC 15B Radiated Emissions Limits Test Results, 1GHz – 6 GHz, Class A


Industry Canada ICES-003 Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
2494	V	0	100	37.92	1.908	20	2.931	22.759	56	-33.241
1270	H	16	100	46.65	-2.401	20	1.638	25.887	56	-30.113


Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
1270	H	16	100	66.46	-2.401	20	1.638	45.697	76	-30.303
2494	V	0	100	60.55	1.908	20	2.931	45.389	76	-30.611

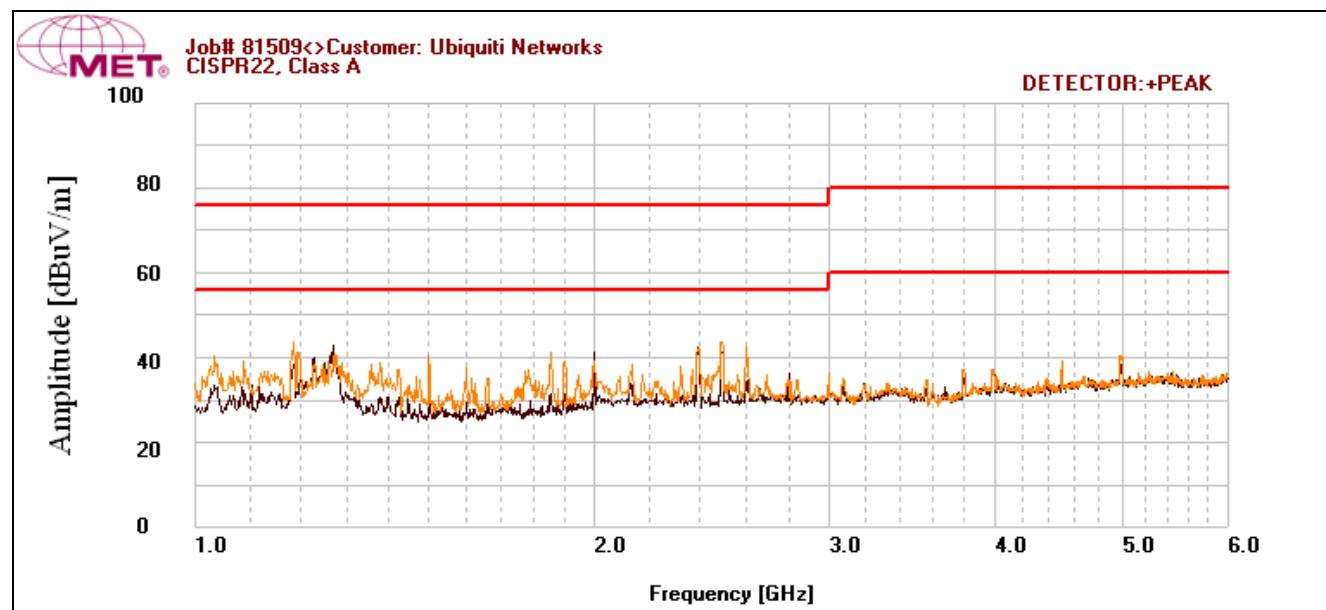Table 15. ICES-003 Radiated Emissions Limits Test Results, 1GHz – 6GHz

Plot 6. ICES-003 Radiated Emissions Limits Test Results, 1GHz – 6GHz, Class A

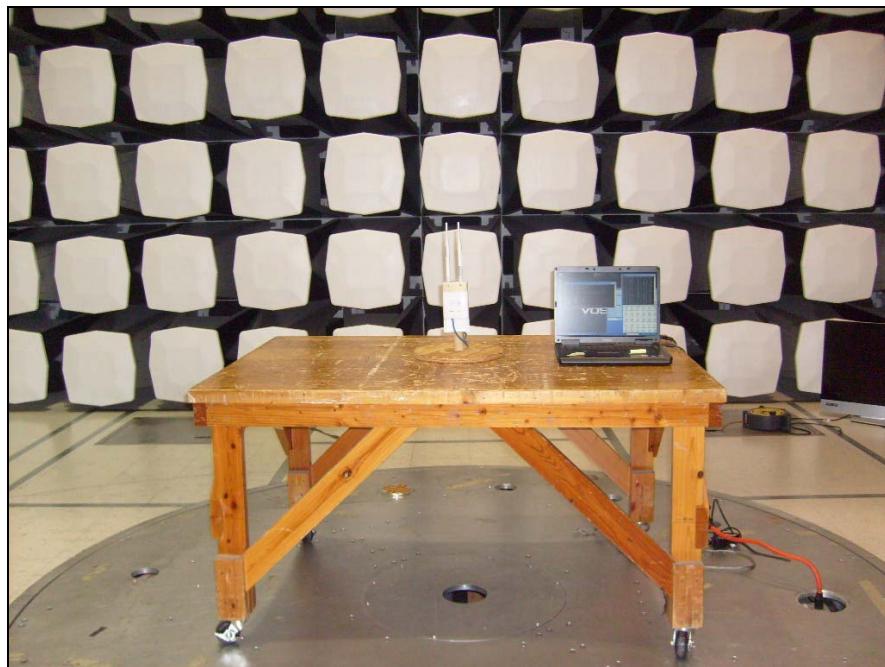Radiated Emission Limits Test Setup

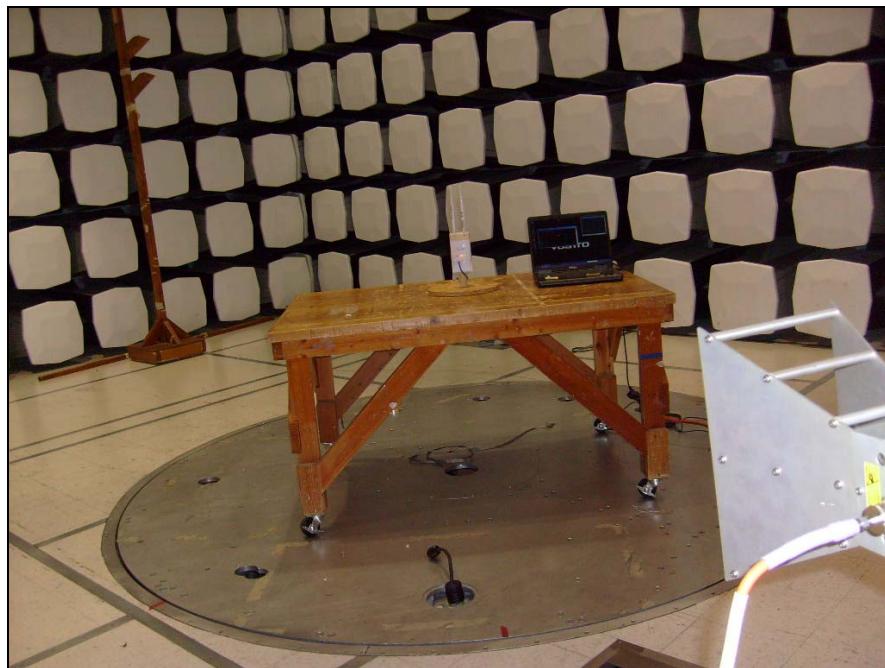

Photograph 3. Radiated Emission Test Setup 30 MHz - 1 GHz



Photograph 4. Radiated Emission Test Setup 1GHz - 6 GHz

IV. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested meets the criteria of this rule by virtue of having professionally installed. The EUT is therefore compliant with §15.203.

Gain/Type	Model	Manufacturer
6dBi Omni	O-2G-6	Ubiquiti Networks
16dBi Sector	AMS-2G-16	Ubiquiti Networks
18dBi Panel	RP-2G-18	Ubiquiti Networks
25dBi Grid	AG-2G-25	Ubiquiti Networks

Test Engineer(s): Anderson Soungpanya

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s): **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 16. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a semi-anechoic chamber. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz". The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. The tests were conducted in a RF-shielded enclosure.


Test Results: The EUT was found to comply with the requirement(s) of this section. Measured emissions were below applicable limits

Test Engineer(s): Anderson Soungpanya

Test Date(s): 04/23/09

Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Results QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG	Results AVG
4.99	46.72	73	-26.28	Pass	37.91	60	-22.09	Pass
.399	49.26	79	-29.74	Pass	38.53	66	-27.47	Pass
.862	40.84	73	-32.16	Pass	28.46	60	-31.54	Pass

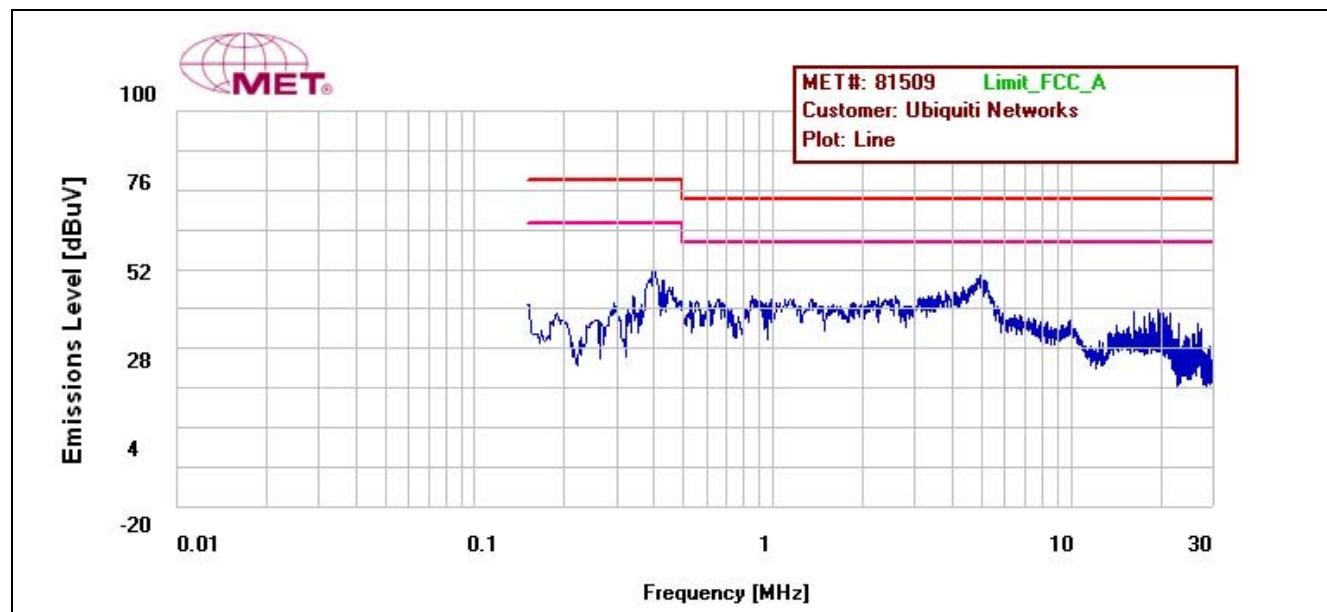Table 17. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

Plot 7. Conducted Emission, Phase Line Plot

Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Results QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG	Results AVG
4.94	46.87	73	-26.13	Pass	37.57	60	-22.43	Pass
.401	53.26	79	-25.74	Pass	41.35	66	-24.65	Pass
.456	48.12	79	-30.88	Pass	33.73	66	-32.27	Pass

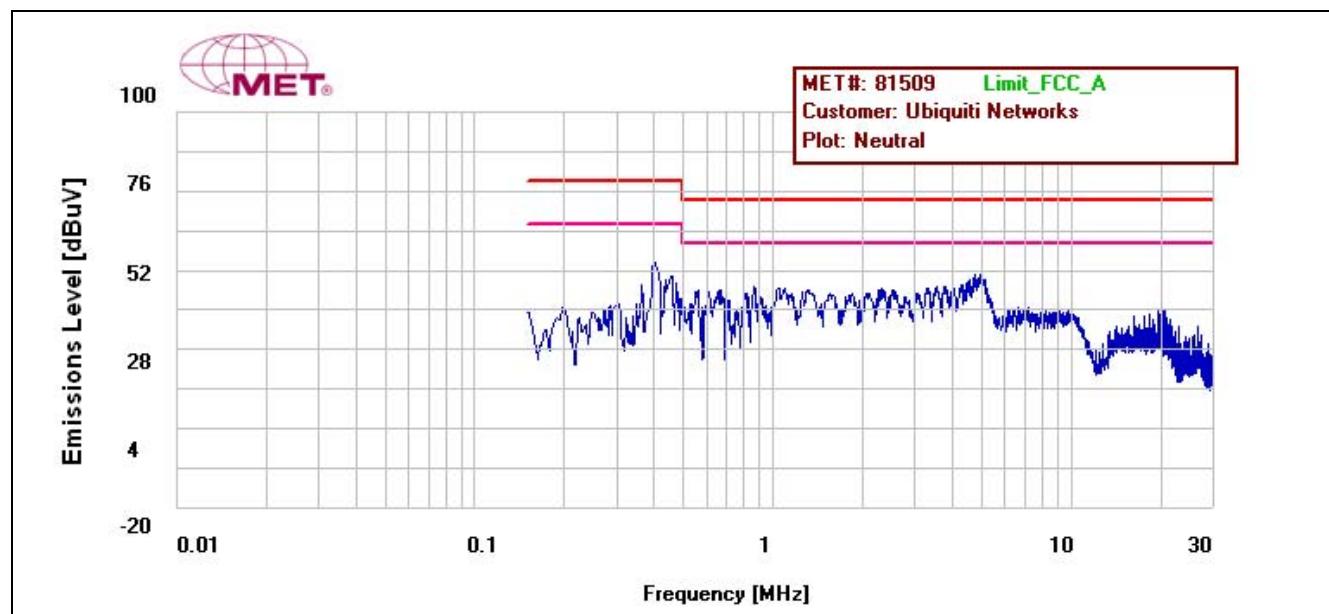Table 18. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)



Plot 8. Conducted Emission, Neutral Line Plot

Conducted Emission Limits Test Setup



Photograph 5. Conducted Emissions Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a) 6 dB and 99% Bandwidth

Test Requirements: § 15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:


For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was set to the mid channel at the highest output power and connected to the spectrum analyzer through an attenuator and a directional coupler. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, $VBW > RBW$. The 6 dB Bandwidth was measured and recorded. The measurements were repeated at the low and high channels.

Test Results Equipment complies with § 15.247 (a). The 6 dB and 99% Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Anderson Soungpanya

Test Date(s): 04/16/09, 04/17/09 & 04/21/09

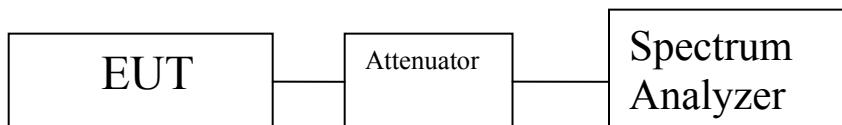

Block Diagram 1. Occupied Bandwidth Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

802.11b mode			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	2412	12.078	15.0930
Mid	2437	12.192	15.5038
High	2462	11.177	16.0177

Table 19. Occupied Bandwidth Summary Results for 802.11b mode (Port 1)

802.11g mode			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	2412	16.448	16.5690
Mid	2437	16.175	16.4802
High	2462	16.052	16.4808

Table 20. Occupied Bandwidth Summary Results for 802.11g mode (Port 1)

802.11n mode (20MHz)			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	2412	17.429	17.6735
Mid	2437	17.201	17.7422
High	2462	17.124	17.7270

Table 21. Occupied Bandwidth Summary Results for 802.11n mode 20MHz (Port 1)

802.11n mode (40MHz)			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Mid	2437	35.904	36.1716

Table 22. Occupied Bandwidth Summary Results for 802.11n mode 40MHz (Port 1)

Electromagnetic Compatibility Criteria for Intentional Radiators


802.11n mode (20MHz)			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	2412	16.873	17.8171
Mid	2437	17.162	17.7690
High	2462	17.580	17.8842

Table 23. Occupied Bandwidth Summary Results for 802.11n mode 20MHz (Port 2)


802.11n mode (40MHz)			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Mid	2437	34.644	36.4218

Table 24. Occupied Bandwidth Summary Results for 802.11n mode 40MHz (Port 2)


Occupied Bandwidth Test Results – 802.11b Mode - Port 1

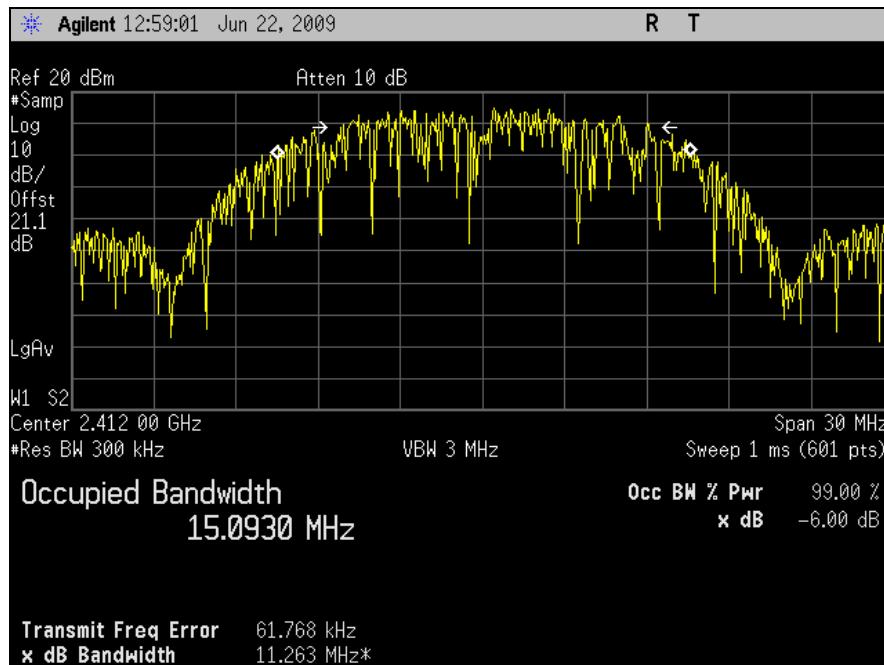

Plot 9. 802.11/b Low Ch Occupied Band Width

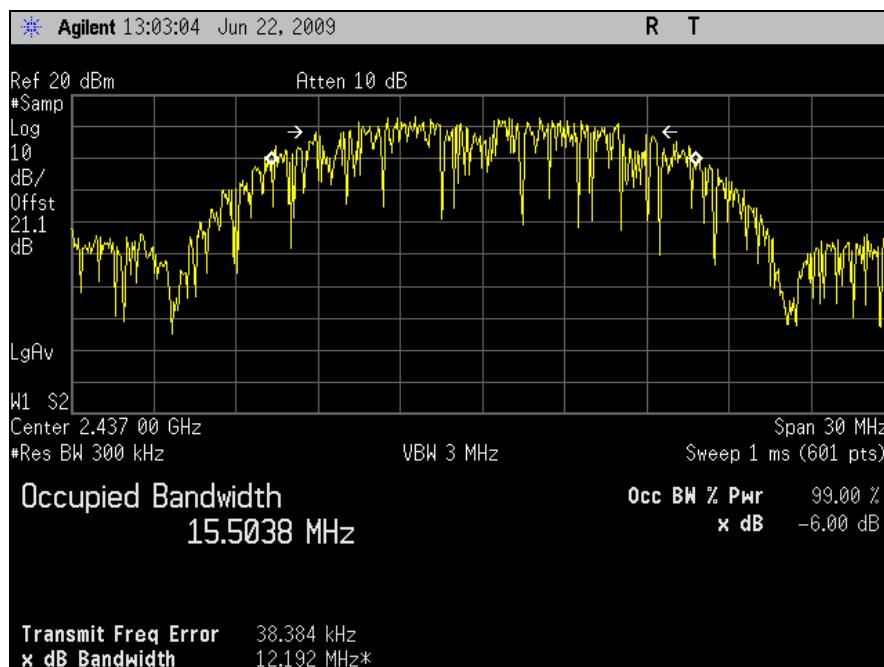


Plot 10. 802.11/b Mid Ch Occupied Band Width

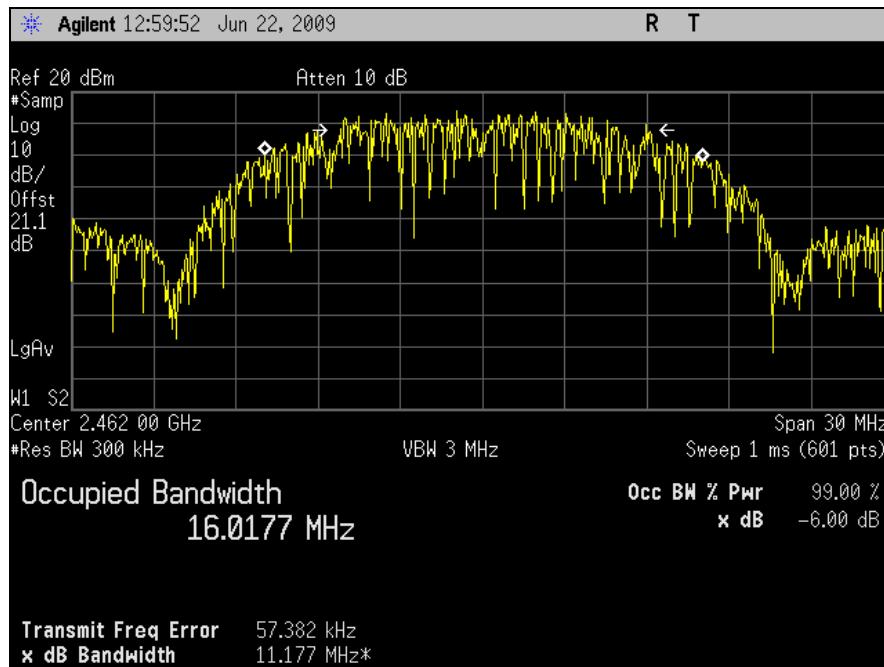


Plot 11. 802.11/b High Ch Occupied Band Width


Occupied Bandwidth Test Results – 802.11g Mode - Port 1

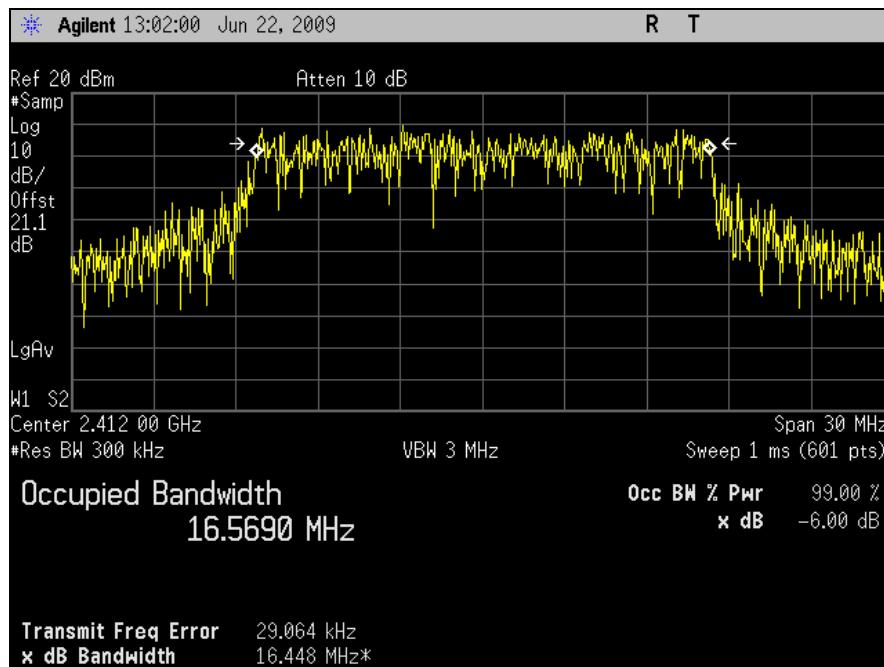

Plot 12. 802.11/g Low Ch Occupied Band Width

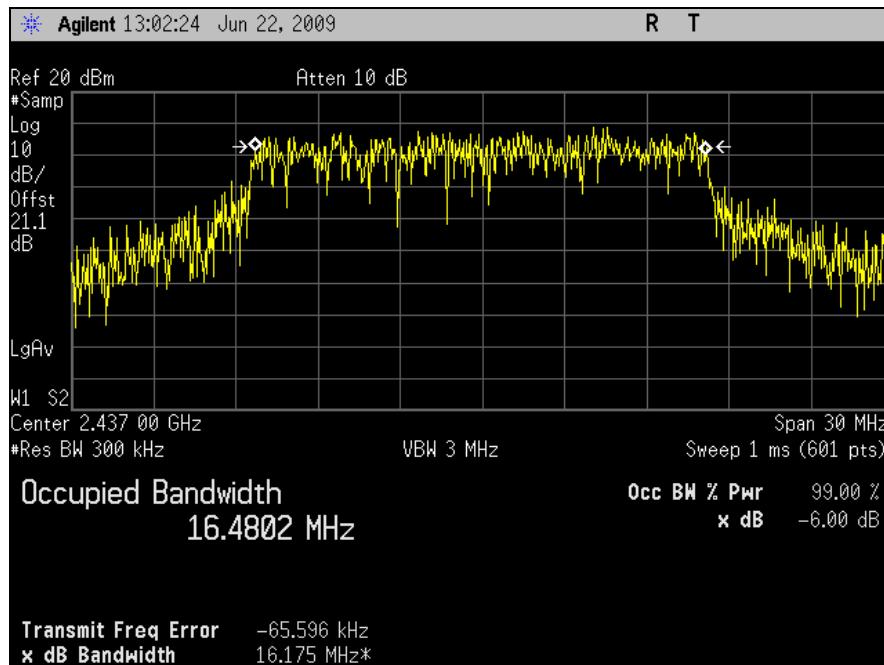


Plot 13. 802.11/g Mid Ch Occupied Band Width

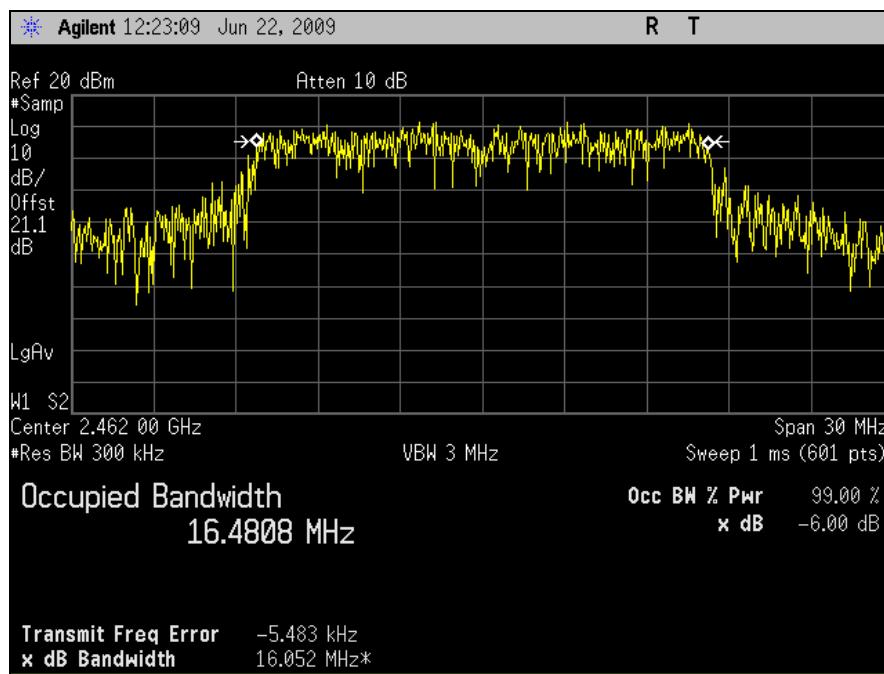


Plot 14. 802.11/g High Ch Occupied Band Width

Occupied Bandwidth Test Results – 802.11n 20MHz Mode - Port 1

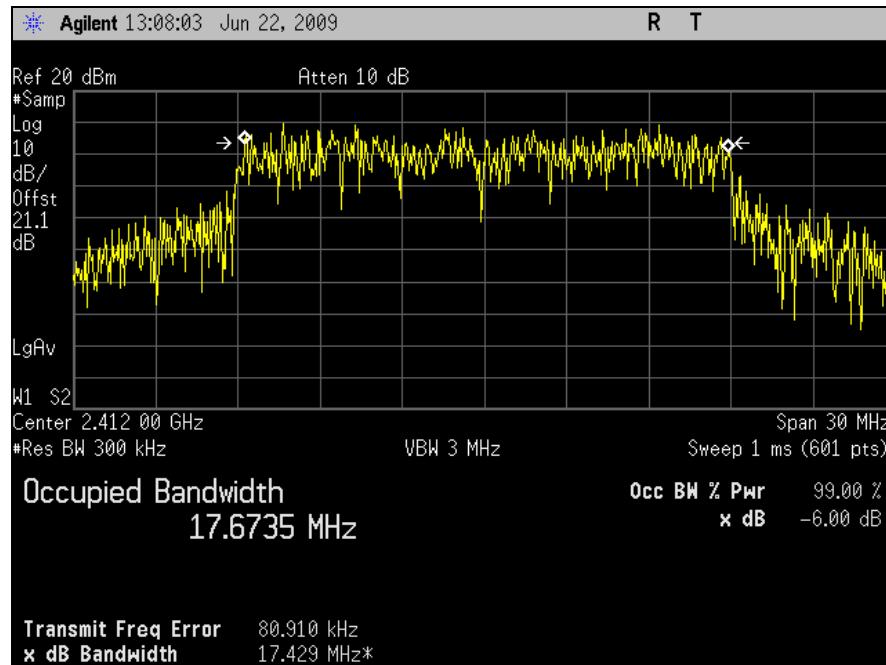


Plot 15. 802.11/n 20MHz - Low Ch Occupied Band Width (Port 1)

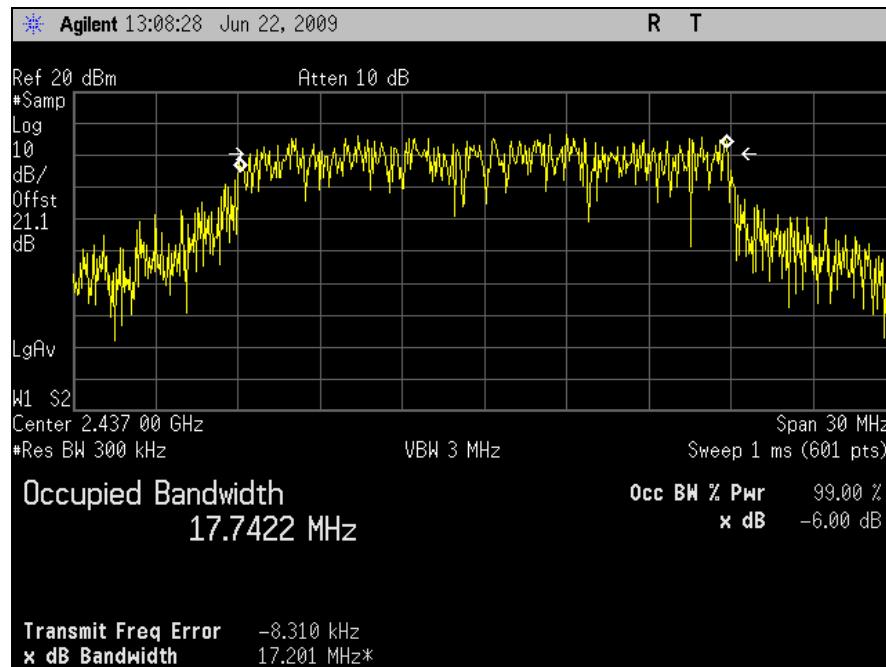


Plot 16. 802.11/n 20MHz - Mid Ch Occupied Band Width (Port 1)

Occupied Bandwidth Test Results – 802.11n 20MHz Mode - Port 1

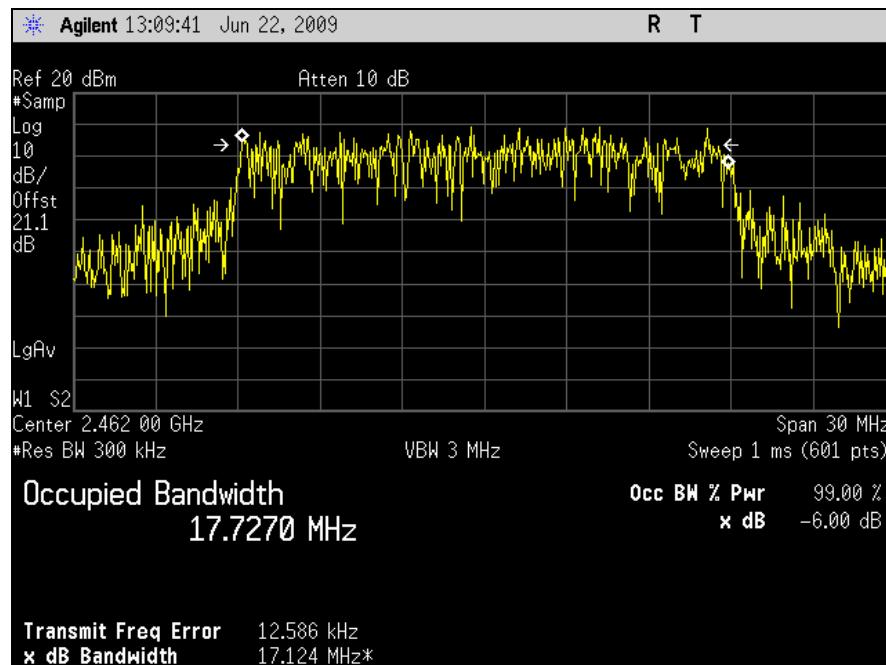


Plot 17. 802.11/n 20MHz - High Ch Occupied Band Width (Port 1)

Occupied Bandwidth Test Results – 802.11n 40MHz Mode - Port 1

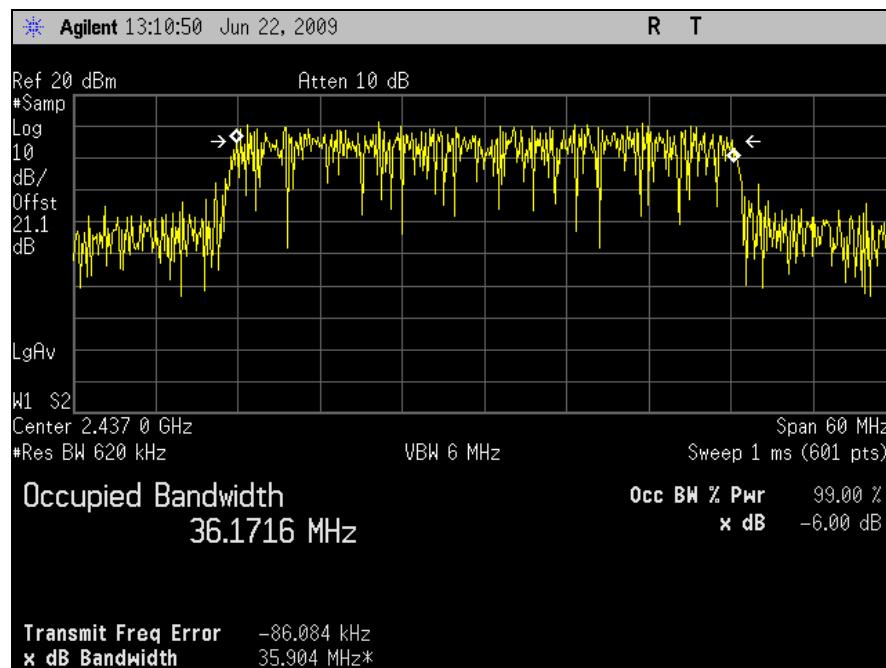


Plot 18. 802.11/n 40MHz - Mid Ch Occupied Band Width (Port 1)

Occupied Bandwidth Test Results – 802.11n 20MHz Mode - Port 2

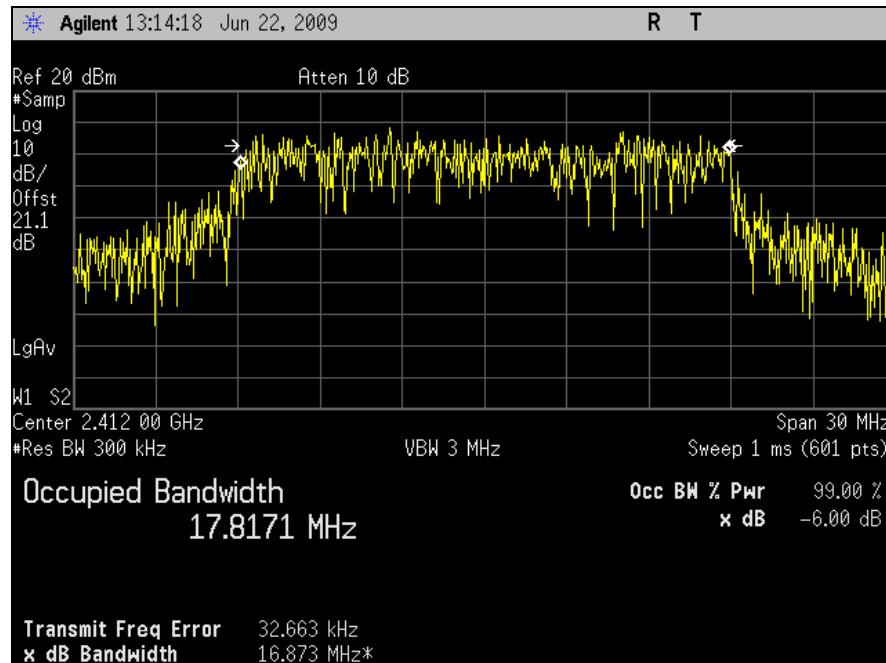


Plot 19. 802.11/n 20MHz - Low Ch Occupied Band Width (Port 2)

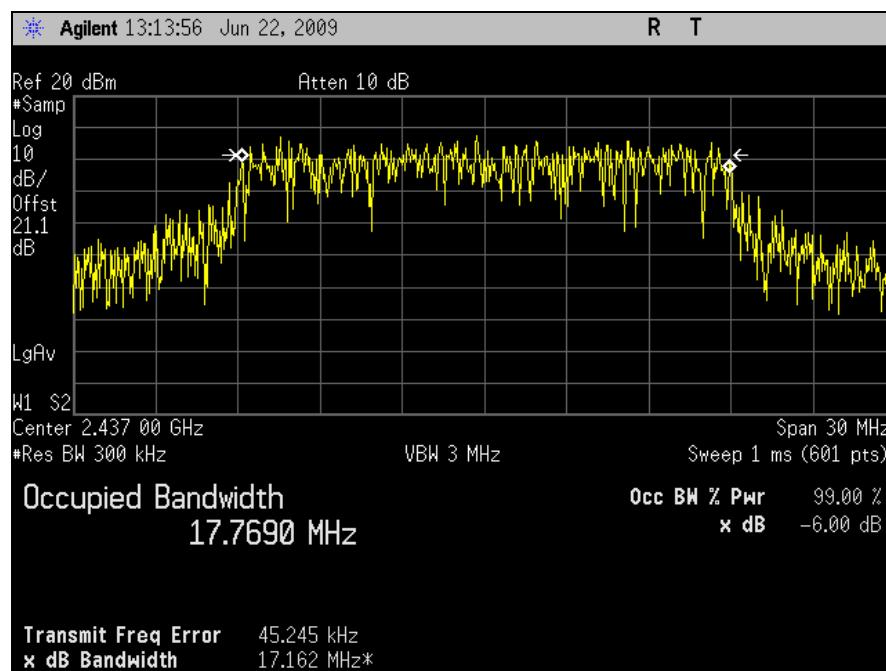


Plot 20. 802.11/n 20MHz - Mid Ch Occupied Band Width (Port 2)

Occupied Bandwidth Test Results – 802.11n 20MHz Mode - Port 2

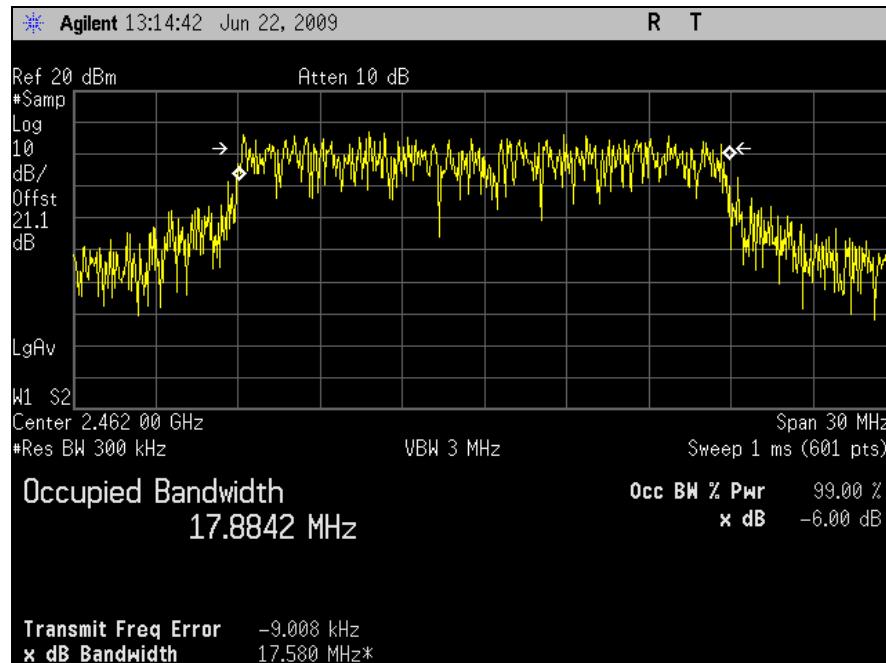

Plot 21. 802.11/n 20MHz - High Ch Occupied Band Width (Port 2)

Occupied Bandwidth Test Results – 802.11n 40MHz Mode - Port 2

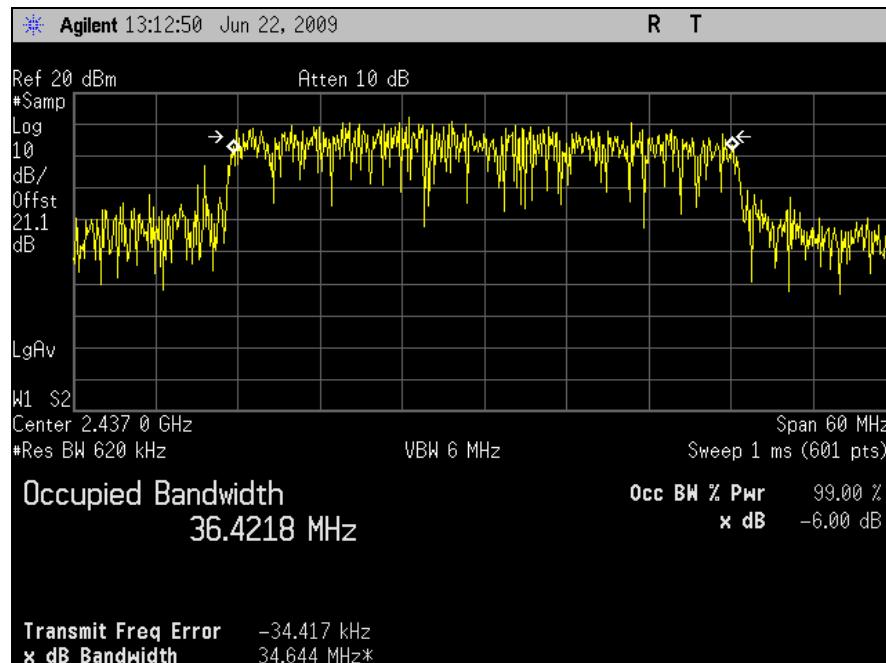

Plot 22. 802.11/n 40MHz - Mid Ch Occupied Band Width (Port 2)

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

Test Requirements: §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400–2483.5	1.000
5725– 5850	1.000

Table 25. Output Power Requirements from §15.247

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 25, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.


Fixed, point-to-point operation excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated Power Meter. The EUT was measured at the low, mid and high channels of each band at a data rate which gave the maximum power level.

Test Results: Equipment complies with the Peak Power Output limits of § 15.247(b).

Test Engineer(s): Anderson Soungpanya

Test Date(s): 05/01/09

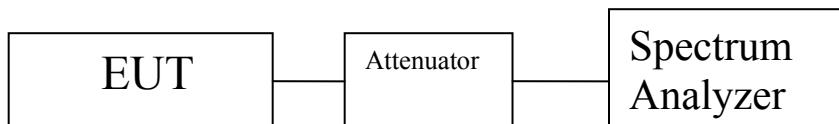

Block Diagram 2. Peak Power Output Test Setup

Output Power Test Results – 802.11b Mode - Port 1

6dBi Omni Antenna		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	25.67
Mid	2437	25.22
High	2462	24.77

Table 26. Output Power Test Results, 802.11b Mode, Port 1 – Omni Antenna

16dBi Sector Antenna		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	13.85
Mid	2437	15.39
High	2462	12.40

Table 27. Output Power Test Results, 802.11b Mode, Port 1 – Sector Antenna


18dBi Panel Antenna		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	9.96
Mid	2437	15.12
High	2462	10.14

Table 28. Output Power Test Results, 802.11b Mode, Port 1 – Panel Antenna


25dBi Grid Antenna		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	8.48
Mid	2437	11.17
High	2462	7.20

Table 29. Output Power Test Results, 802.11b Mode, Port 1 – Grid Antenna

Output Power Test Results – 802.11b Mode - Port 1

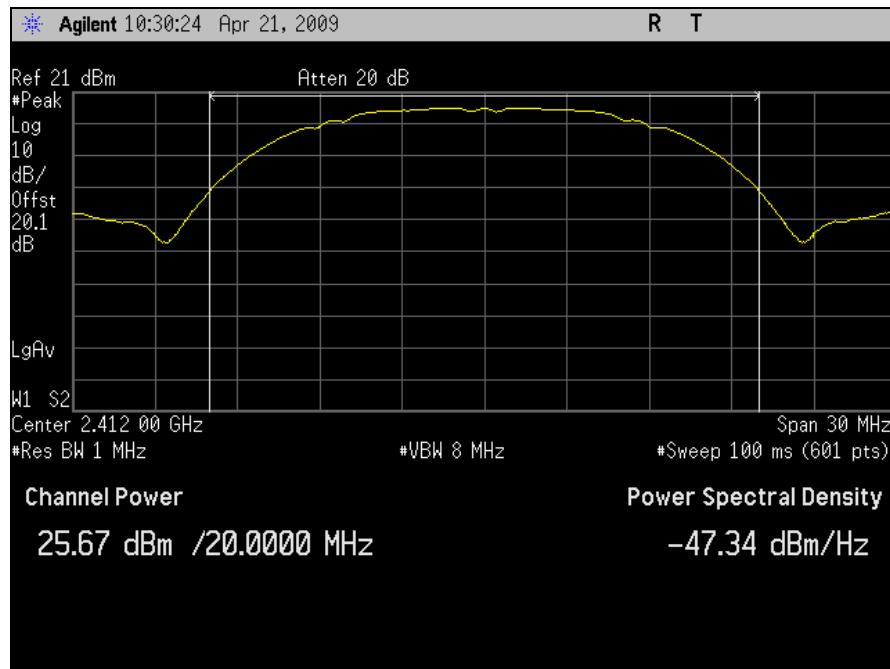

Plot 23. Output Power – Low Channel 802.11b Mode, Port 1 (6dBi Omni Antenna)

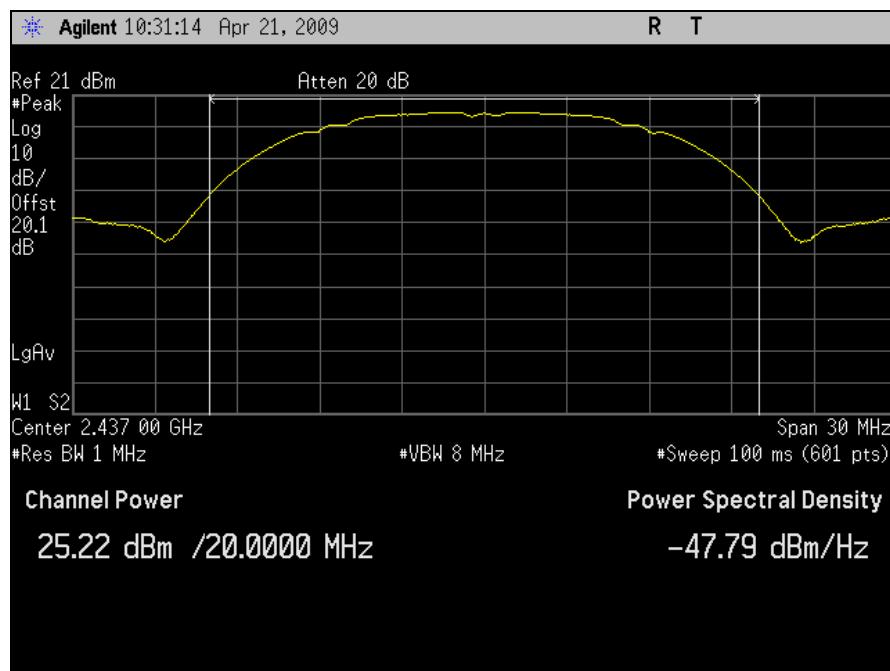


Plot 24. Output Power – Mid Channel 802.11b Mode, Port 1 (6dBi Omni Antenna)




Plot 25. Output Power – High Channel 802.11b Mode, Port 1 (6dBi Omni Antenna)




Plot 26. Output Power – Low Channel 802.11b Mode, Port 1 (16dBi Sector Antenna)

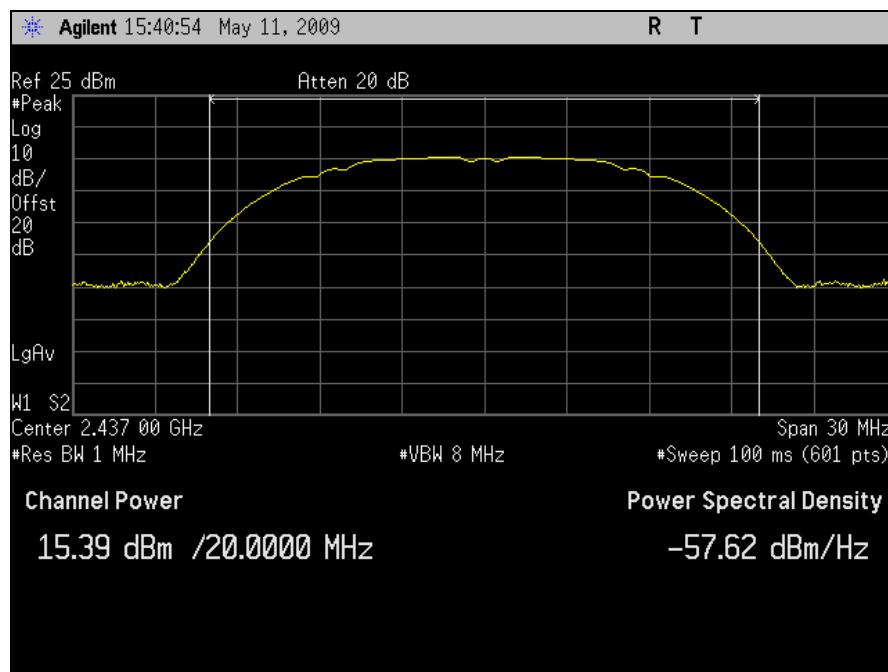

Plot 27. Output Power – Mid Channel 802.11b Mode, Port 1 (16dBi Sector Antenna)

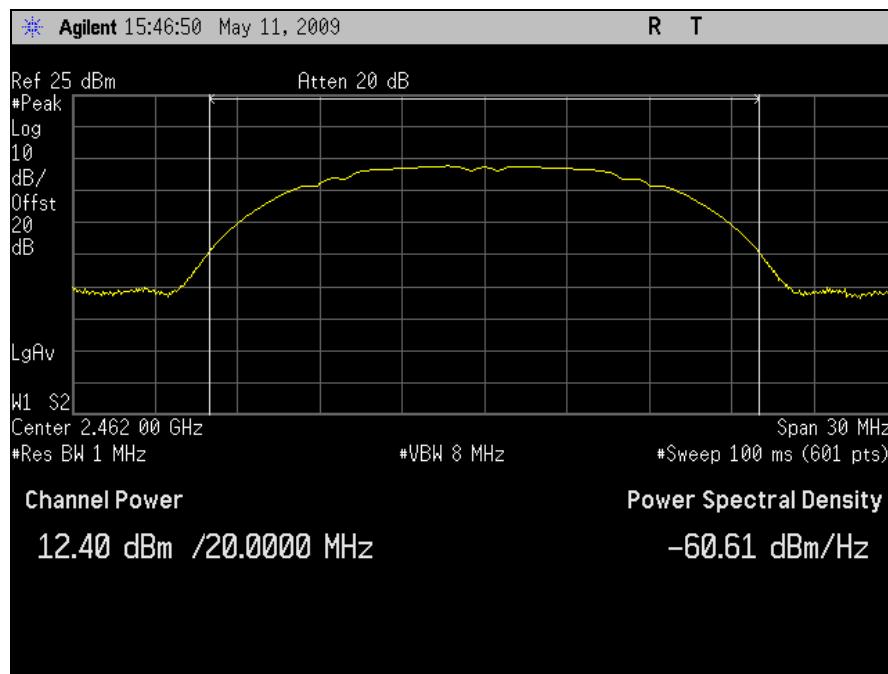


Plot 28. Output Power – High Channel 802.11b Mode, Port 1 (16dBi Sector Antenna)

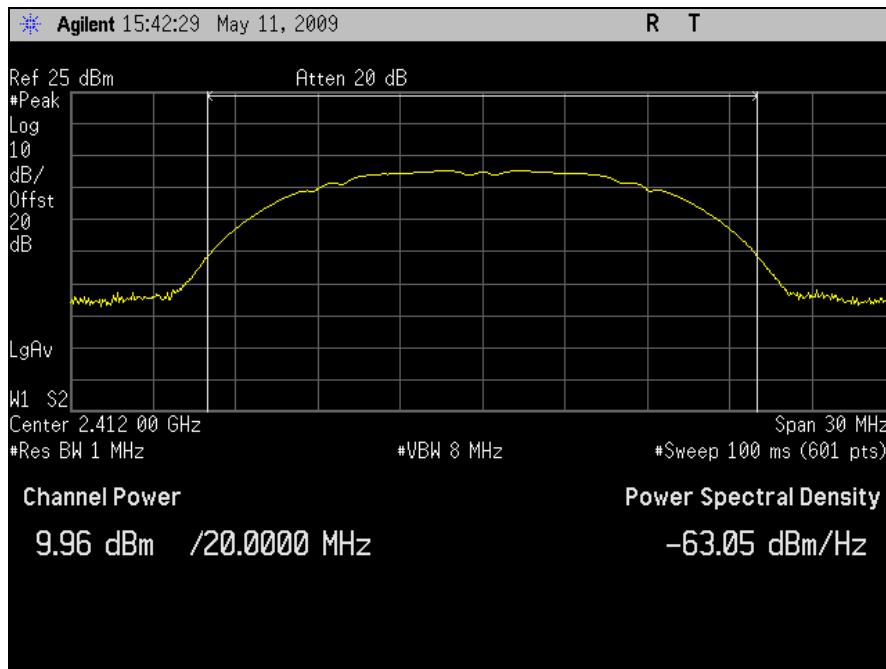


Plot 29. Output Power – Low Channel 802.11b Mode, Port 1 (18dBi Panel Antenna)




Plot 30. Output Power – Mid Channel 802.11b Mode, Port 1 (18dBi Panel Antenna)

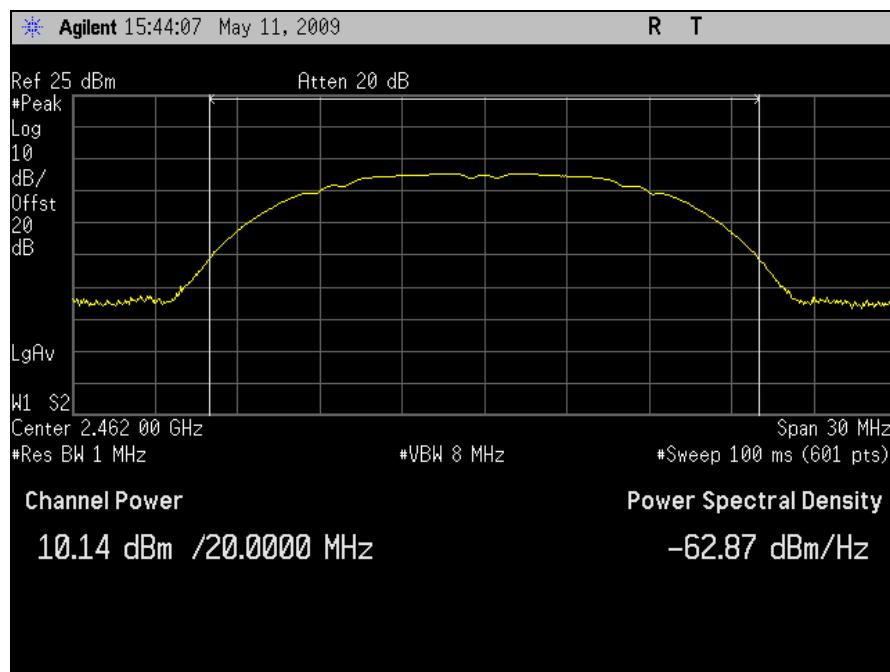


Plot 31. Output Power – High Channel 802.11b Mode, Port 1 (18dBi Panel Antenna)

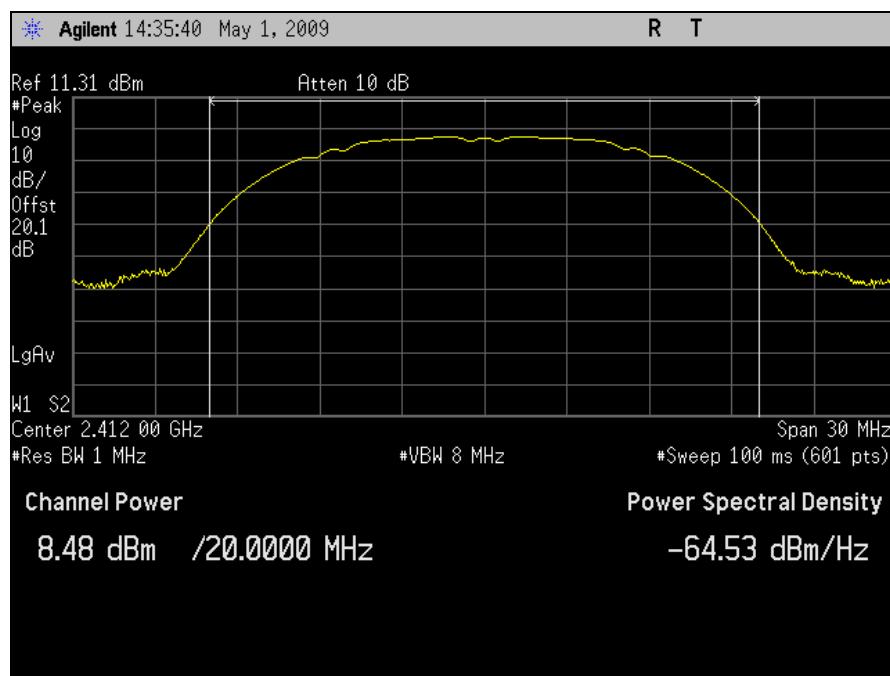

Plot 32. Output Power – Low Channel 802.11b Mode, Port 1 (25dBi Grid Antenna)

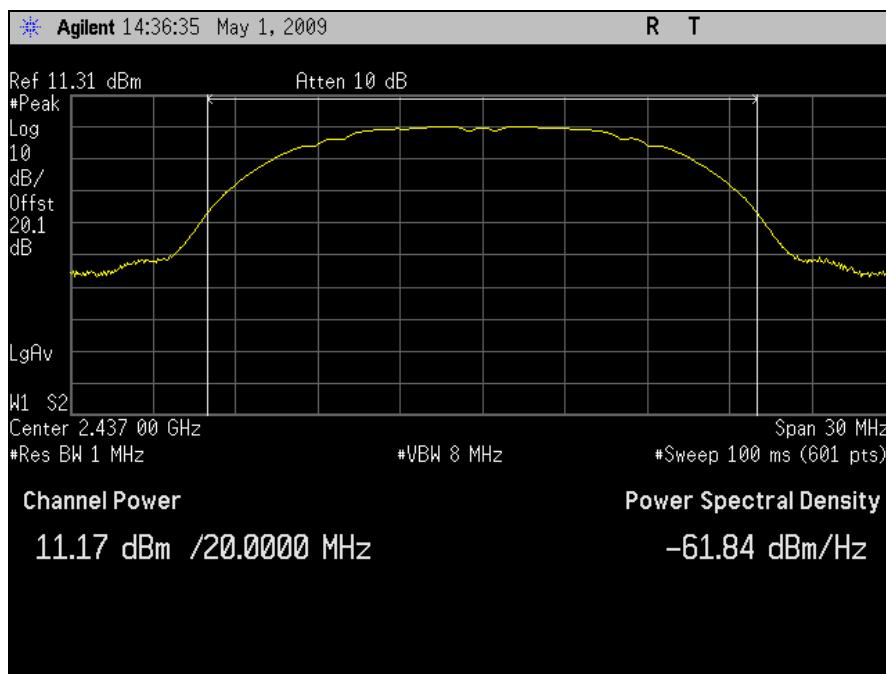

Plot 33. Output Power – Mid Channel 802.11b Mode, Port 1 (25dBi Grid Antenna)

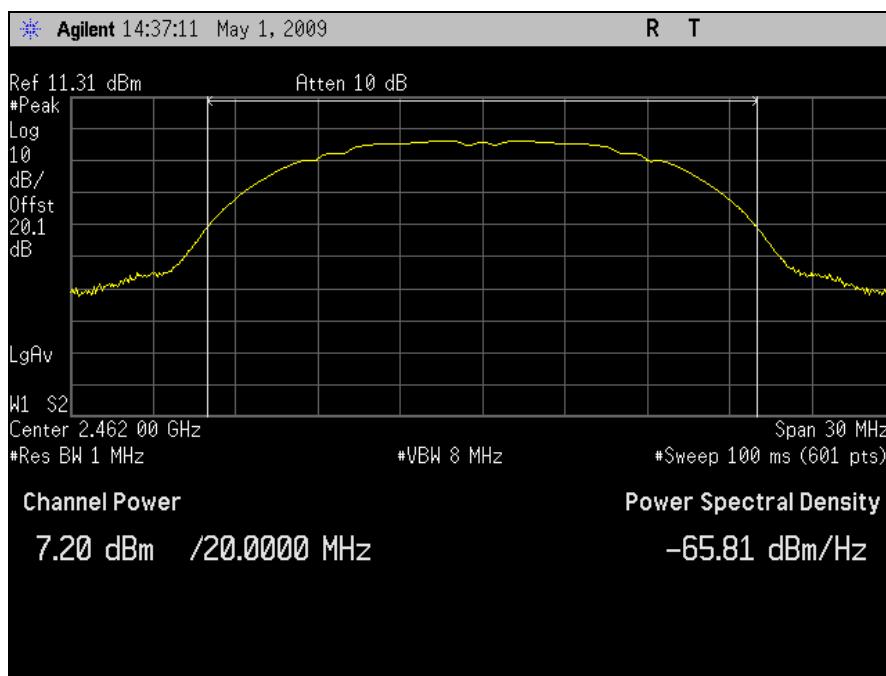

Plot 34. Output Power – High Channel 802.11b Mode, Port 1 (25dBi Grid Antenna)

Output Power Test Results – 802.11g Mode - Port 1

6dBi Omni Antenna		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	29.71
Mid	2437	28.98
High	2462	29.25

Table 30. Output Power Test Results, 802.11g Mode, Port 1 – Omni Antenna

16dBi Sector Antenna		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	19.81
Mid	2437	19.52
High	2462	18.02

Table 31. Output Power Test Results, 802.11g Mode, Port 1 – Sector Antenna


18dBi Panel Antenna		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	16.85
Mid	2437	20.59
High	2462	15.25

Table 32. Output Power Test Results, 802.11g Mode, Port 1 – Panel Antenna


25dBi Grid Antenna		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	14.30
Mid	2437	16.83
High	2462	13.97

Table 33. Output Power Test Results, 802.11g Mode, Port 1 – Grid Antenna


Output Power Test Results – 802.11g Mode - Port 1

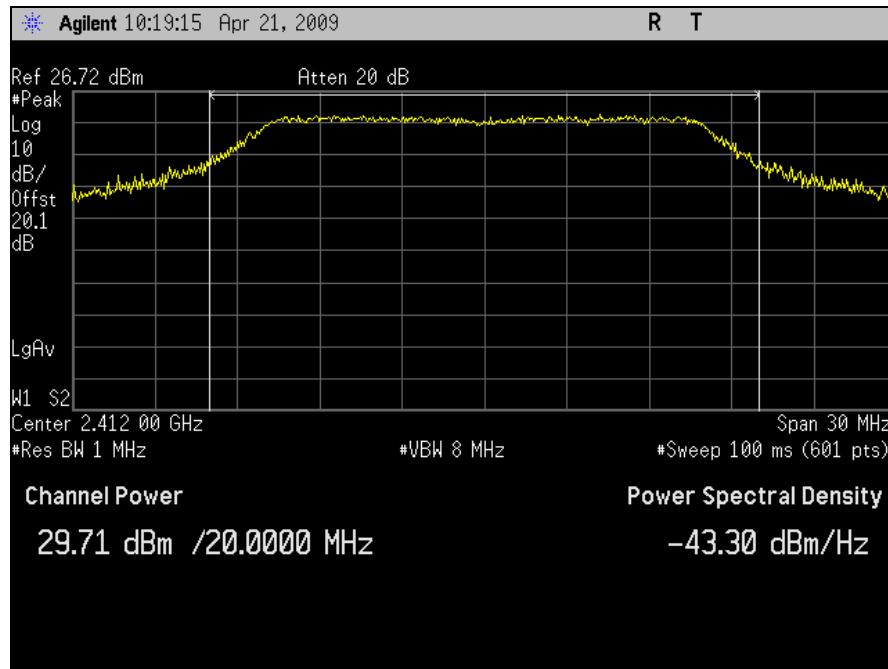


Plot 35. Output Power – Low Channel 802.11g Mode, Port 1 (6dBi Omni Antenna)

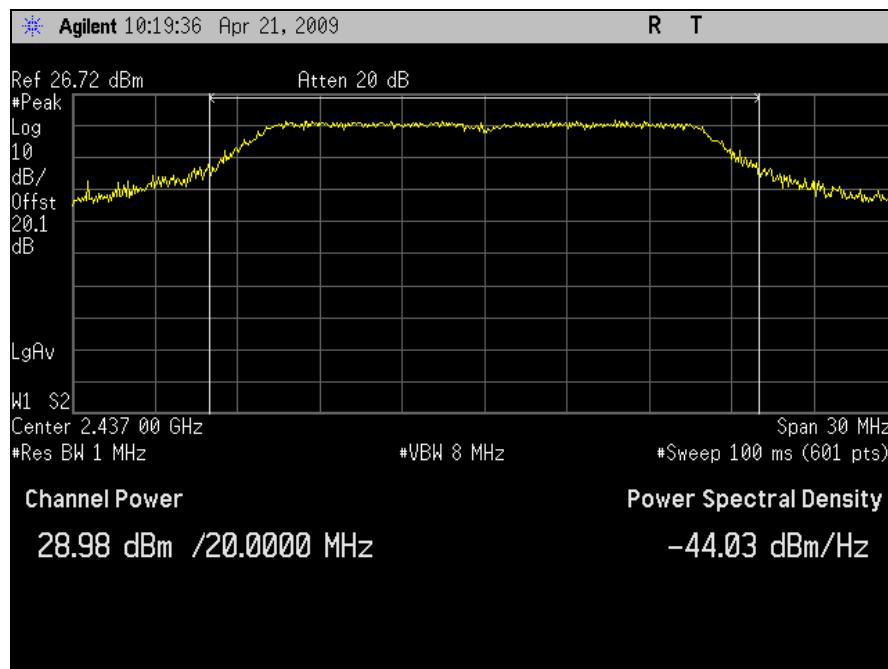


Plot 36. Output Power – Mid Channel 802.11g Mode, Port 1 (6dBi Omni Antenna)

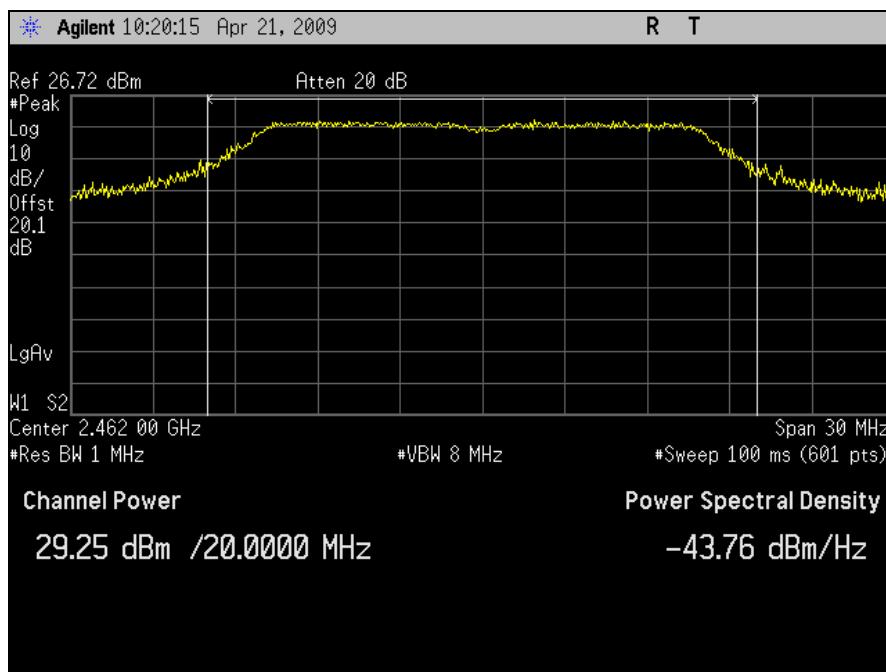


Plot 37. Output Power – High Channel 802.11g Mode, Port 1 (6dBi Omni Antenna)

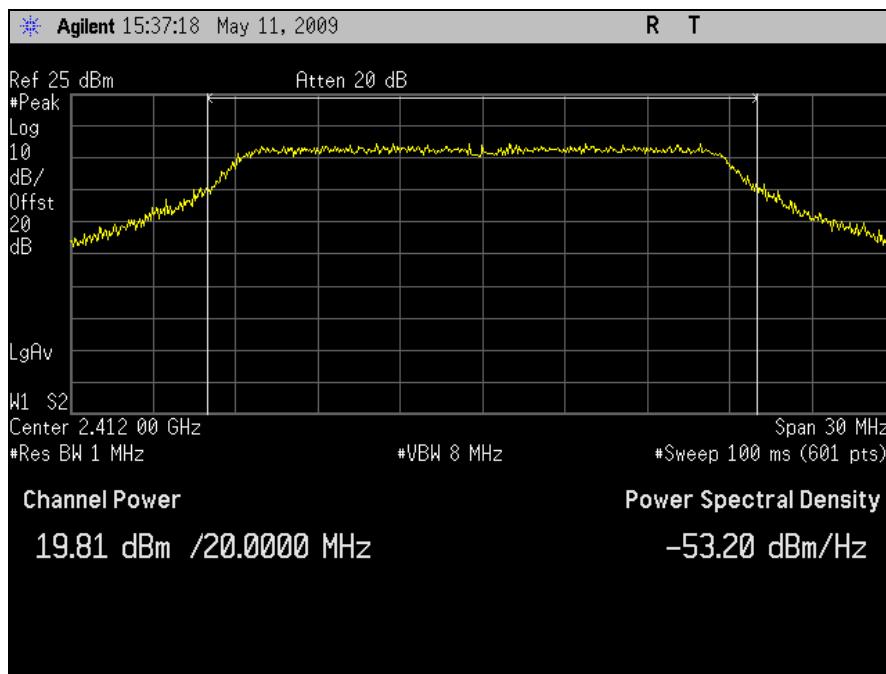

Plot 38. Output Power – Low Channel 802.11g Mode, Port 1 (16dBi Sector Antenna)

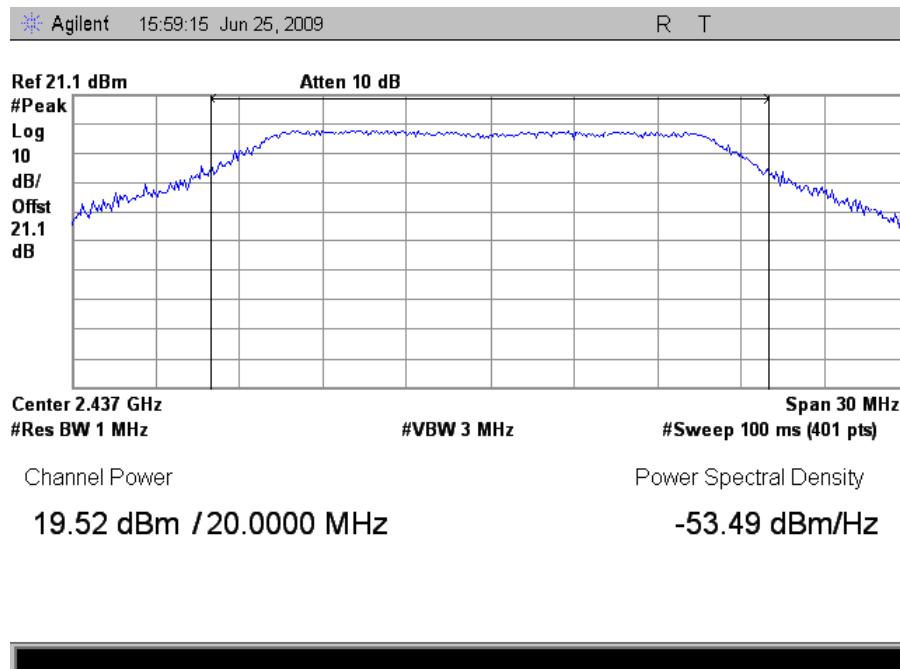


Plot 39. Output Power – Mid Channel 802.11g Mode, Port 1 (16dBi Sector Antenna)

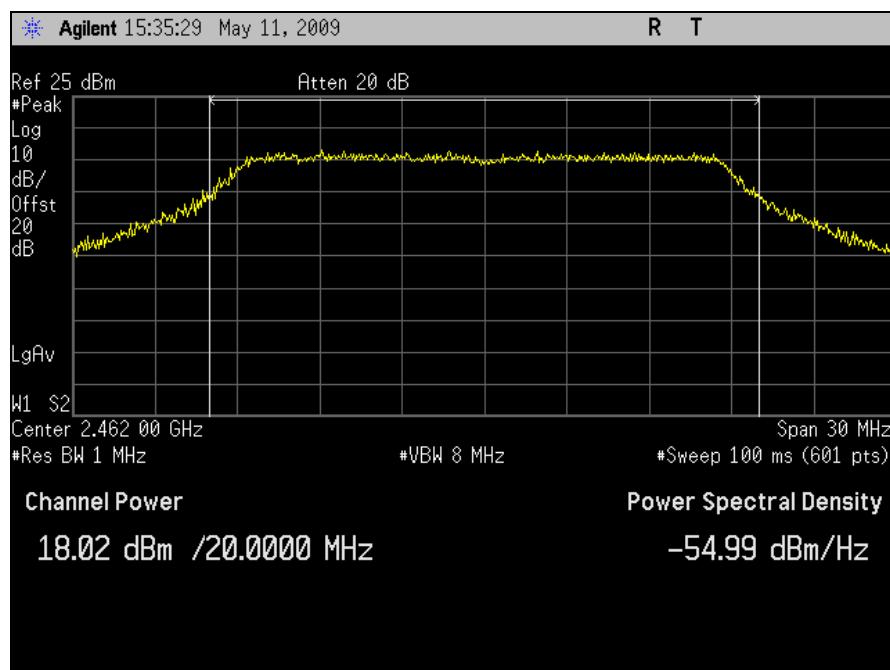


Plot 40. Output Power – High Channel 802.11g Mode, Port 1 (16dBi Sector Antenna)




Plot 41. Output Power – Low Channel 802.11g Mode, Port 1 (18dBi Panel Antenna)

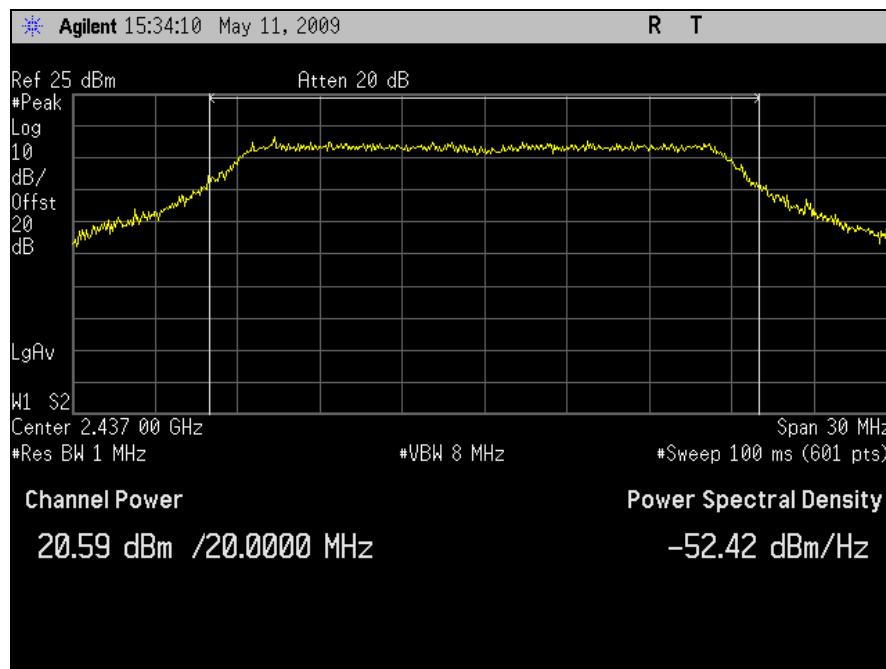

Plot 42. Output Power – Mid Channel 802.11g Mode, Port 1 (18dBi Panel Antenna)

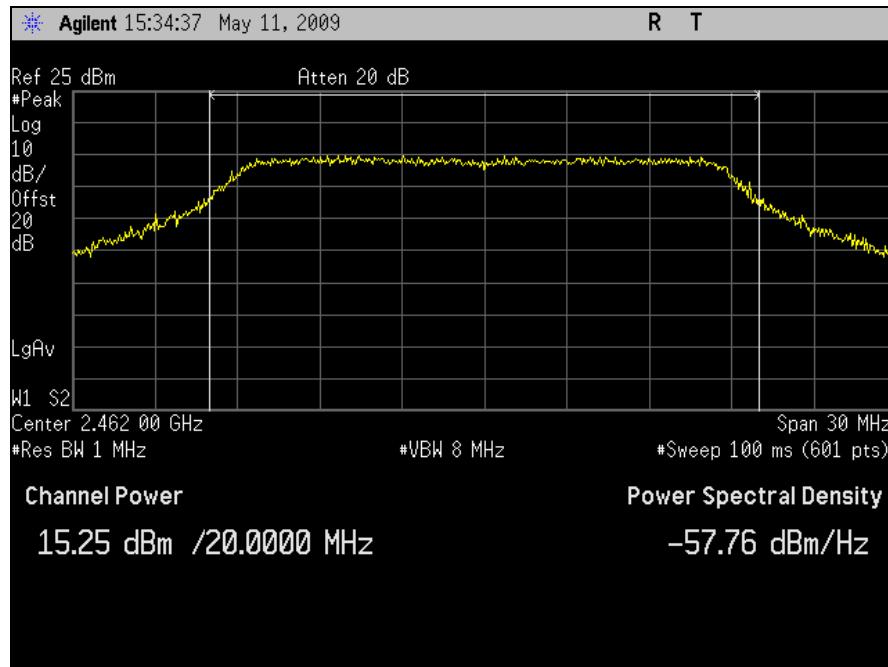


Plot 43. Output Power – High Channel 802.11g Mode, Port 1 (18dBi Panel Antenna)

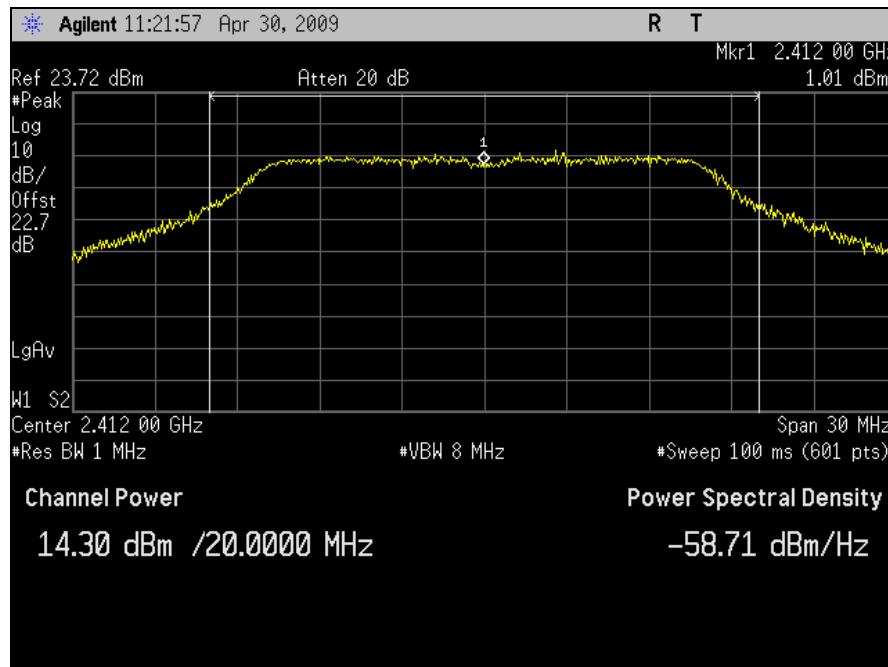

Plot 44. Output Power – Low Channel 802.11g Mode, Port 1 (25dBi Grid Antenna)



Plot 45. Output Power – Mid Channel 802.11g Mode, Port 1 (25dBi Grid Antenna)

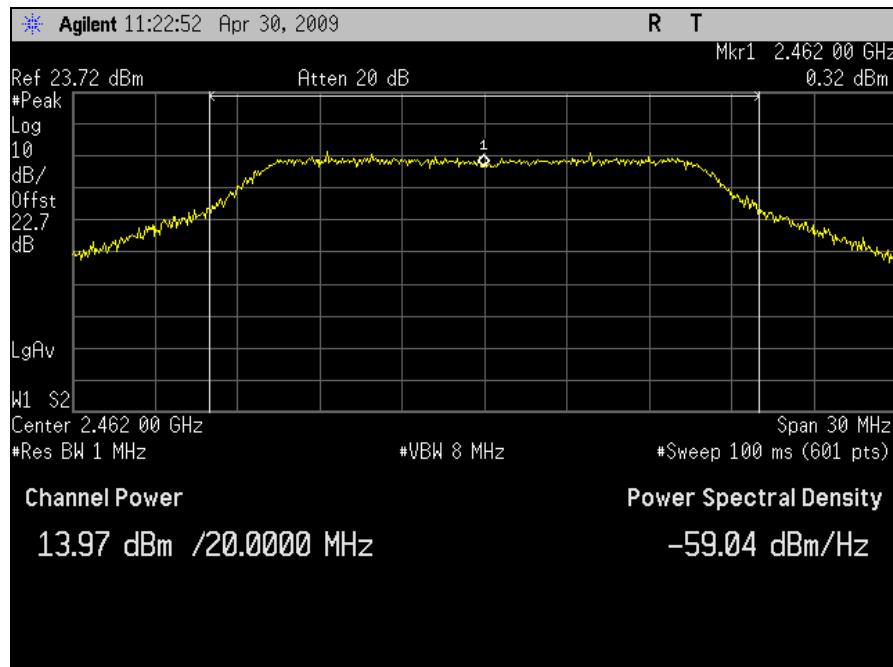

Plot 46. Output Power – High Channel 802.11g Mode, Port 1 (25dBi Grid Antenna)

Output Power Test Results – 802.11n Mode - Port 1

20MHz		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	26.83
Mid	2437	26.44
High	2462	26.66

Table 34. Output Power Test Results, 802.11n Mode, 20MHz, Port 1

40MHz		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Mid	2437	26.34

Table 35. Output Power Test Results, 802.11n Mode, 40MHz, Port 1


Output Power Test Results – 802.11n Mode - Port 1



Plot 47. Output Power – Low Channel 802.11n Mode, Port 1 (20MHz)



Plot 48. Output Power – Mid Channel 802.11n Mode, Port 1 (20MHz)

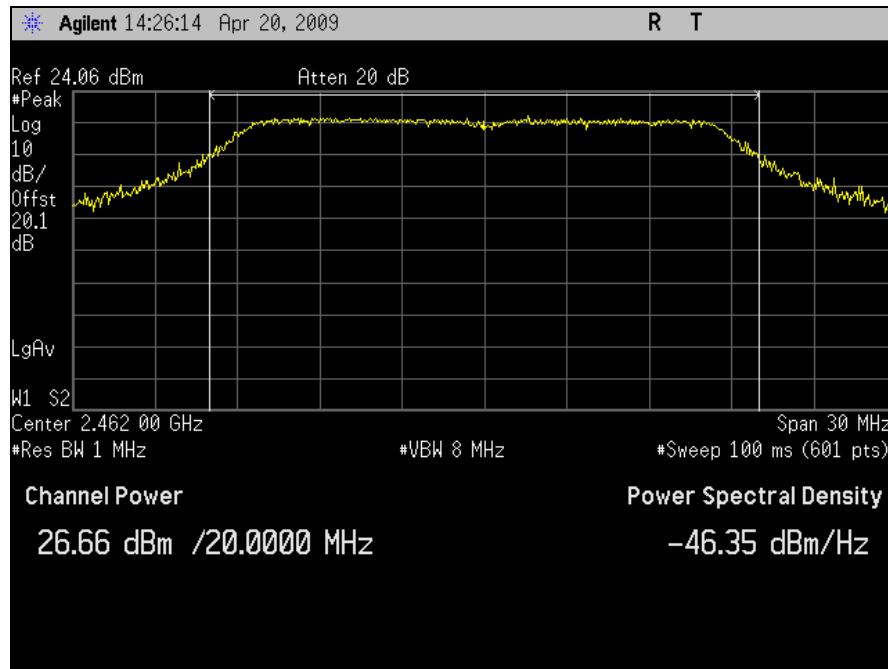

Plot 49. Output Power – High Channel 802.11n Mode, Port 1 (20MHz)



Plot 50. Output Power – Mid Channel 802.11n Mode, Port 1 (40MHz)

Output Power Test Results – 802.11n Mode - Port 2


20MHz		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	26.81
Mid	2437	26.86
High	2462	26.76

Table 36. Output Power Test Results, 802.11n Mode, 20MHz, Port 2


40MHz		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Mid	2437	26.42

Table 37. Output Power Test Results, 802.11n Mode, 40MHz, Port 2

Output Power Test Results – 802.11n Mode - Port 2

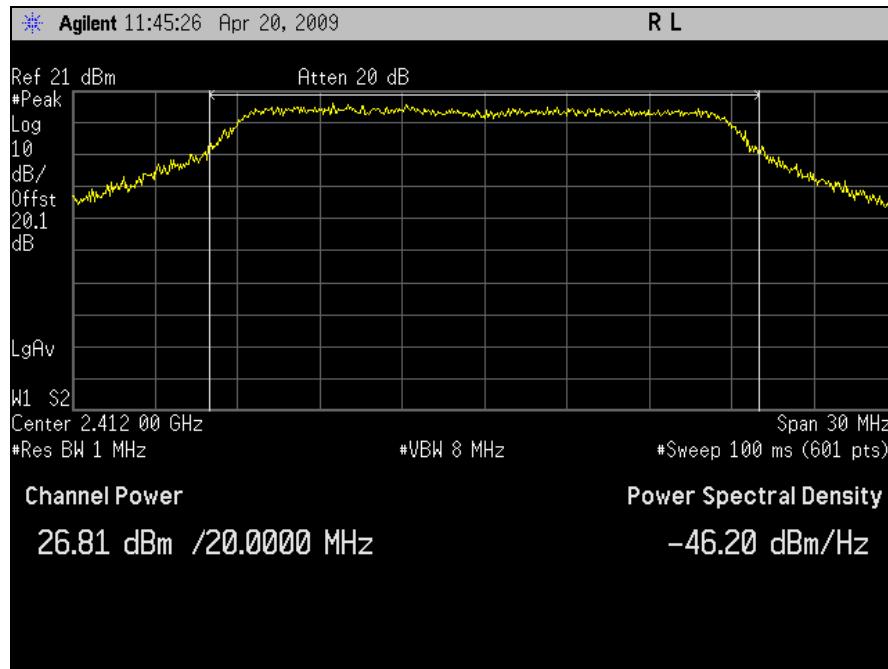


Plot 51. Output Power – Low Channel 802.11n Mode, Port 2 (20MHz)

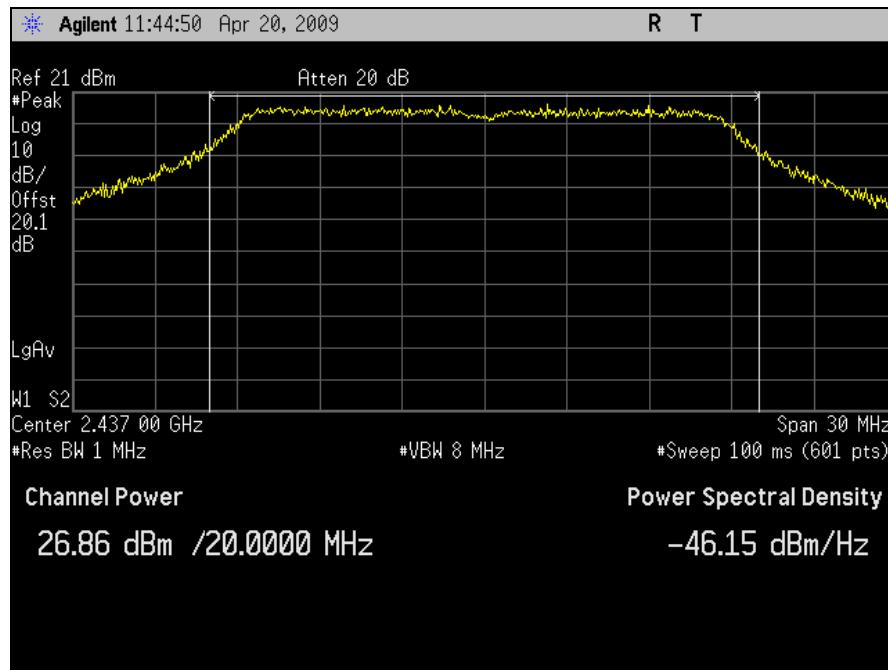

Plot 52. Output Power – Mid Channel 802.11n Mode, Port 2 (20MHz)



Plot 53. Output Power – High Channel 802.11n Mode, Port 2 (20MHz)

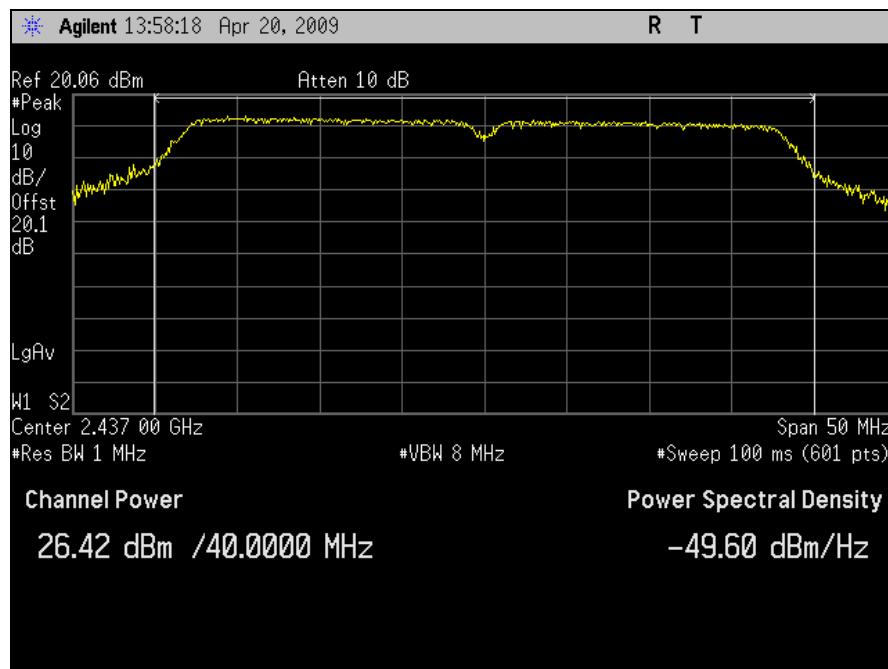

Plot 54. Output Power – Mid Channel 802.11n Mode, Port 2 (40MHz)

802.11n mode					
Carrier Channel	Frequency (MHz)	Port 1 (dBm)	Port 2 (dBm)	Total (dBm)	Total (W)
Low	2412	26.83	26.81	29.82	0.961
Mid	2437	26.44	26.86	29.66	0.925
High	2462	26.66	26.76	29.71	0.937

Table 38. RF Output Power Results – All Ports, 802.11n mode (20MHz)

Note: Total Output Power = Port 1 ($10^{(\text{Output Power}/10)/1000}$) + Port 2 ($10^{(\text{Output Power}/10)/1000}$)

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

RF Exposure Requirements: **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 29.71dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = 6dBi Omni Antenna

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
 P = Power Input to antenna (935.4057mW)
 G = Antenna Gain (3.98 numeric)
 R = Distance (20cm)

$$S = (935.4057 * 3.98 / 4 * 3.14 * 20.0^2) = (3723.917 / 5024) = \mathbf{0.74 \text{ mW/cm}^2} \text{ @ 20cm separation}$$

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 21.32dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = 16dBi Sector Antenna

where, S = Power Density (mW/cm²)
 P = Power Input to antenna (135.5189mW)
 G = Antenna Gain (39.81 numeric)

$$R = (135.5189 * 39.81 / 4 * 3.14 * 1.0)^{1/2} = (5395.106 / 12.56)^{1/2} = \mathbf{20.72 \text{ cm}}$$

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 20.59dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = 18dBi Panel Antenna

where, S = Power Density (1 mW/cm²)
 P = Power Input to antenna (114.5513mW)
 G = Antenna Gain (63.09 numeric)

$$R = (114.5513 * 63.09 / 4 * 3.14 * 1.0)^{1/2} = (7227.698 / 12.56)^{1/2} = 24\text{cm}$$

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 16.83dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = 25dBi Grid Antenna

where, S = Power Density (1 mW/cm²)
 P = Power Input to antenna (48.19478mW)
 G = Antenna Gain (316.2278 numeric)

$$R = (48.19 * 316.2 / 4 * 3.14 * 1.0)^{1/2} = (15240.53 / 12.56)^{1/2} = 34.83\text{cm}$$

MIMO Mode:

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 29.82dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = 6dBi Omni Antenna

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
 P = Power Input to antenna (959.4006mW)
 G = Antenna Gain (3.98 numeric)
 R = Distance (20cm)

$$S = (959.4 * 3.98 / 4 * 3.14 * 20.0^2) = (3819.443 / 5024) = 0.76 \text{ mW/cm}^2 @ 20\text{cm separation}$$

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions – Radiated and Conducted

Test Requirements: §15.247(d); § 15.209 (a); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 39. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): **§ 15.209 (a):** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 40.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB μ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Table 40. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)

Test Procedure: The transmitter was set to the mid channel at the highest output power and placed on a 0.8 m high wooden table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast with 1 m to 4 m height to determine worst case orientation for maximum emissions. Measurement were repeated the measurement at the low and highest channels.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

In accordance with §15.35(b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

EUT Field Strength Final Amplitude = Raw Amplitude – Preamp gain + Antenna Factor + Cable Loss

Test Results: The EUT was found compliant with the Radiated Emission limits of **§15.209(a)** for Intentional Radiators. See following pages for detailed test results.

Test Engineer(s): Anderson Soungpanya

Test Date(s): 04/29/09, 04/30/09 & 05/07/09

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b) 6dBi Omni Antenna

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.824	V	49.85	34.76	33.35	4.58	53.02	Peak	74	-20.98
4.824	V	44.28	34.76	33.35	4.58	47.45	Avg	54	-6.55
7.236	V	45.1	35.01	35.73	5.90	51.73	Peak	74	-22.27
7.236	V	31.05	35.01	35.73	5.90	37.68	Avg	54	-16.32
9.648	V	45.61	35.58	37.83	7.22	55.09	Peak	74	-18.91
9.648	V	31.91	35.58	37.83	7.22	41.39	Avg	54	-12.61
12.06	V	44.24	35.00	39.82	6.67	55.73	Peak	74	-18.27
12.06	V	30.5	35.00	39.82	6.67	41.99	Avg	54	-12.01
Low Channel 2412 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.874	V	46.1	34.74	33.50	4.63	49.49	Peak	74	-24.51
4.874	V	36.98	34.74	33.50	4.63	40.37	Avg	54	-13.63
7.311	V	44.51	35.02	35.95	6.31	51.74	Peak	74	-22.26
7.311	V	31.13	35.02	35.95	6.31	38.36	Avg	54	-15.64
9.748	V	45.21	35.55	37.95	7.16	54.77	Peak	74	-19.23
9.748	V	30.51	35.55	37.95	7.16	40.07	Avg	54	-13.93
12.185	V	46.21	34.94	39.53	7.11	57.91	Peak	74	-16.09
12.185	V	30.58	34.94	39.53	7.11	42.28	Avg	54	-11.72
Mid Channel 2437 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.924	V	45.04	34.73	33.64	4.68	48.62	Peak	74	-25.38
4.924	V	31.99	34.73	33.64	4.68	35.57	Avg	54	-18.43
7.386	V	44.24	35.05	36.15	6.66	52.00	Peak	74	-22.00
7.386	V	30.82	35.05	36.15	6.66	38.58	Avg	54	-15.42
9.848	V	45.29	35.54	38.07	7.08	54.89	Peak	74	-19.11
9.848	V	30.31	35.54	38.07	7.08	39.91	Avg	54	-14.09
12.31	V	44.92	34.83	39.19	7.72	57.00	Peak	74	-17.00
12.31	V	30.46	34.83	39.19	7.72	42.54	Avg	54	-11.46
High Channel 2462 MHz									


Table 41. Radiated Harmonic Emissions Test Results, 802.11b Mode (6dBi Omni Antenna)

Note: All other emissions were measured at the noise floor of the spectrum analyzer.


§ 15.247(d) Radiated Spurious Emissions – 802.11b (6dBi Omni Antenna)

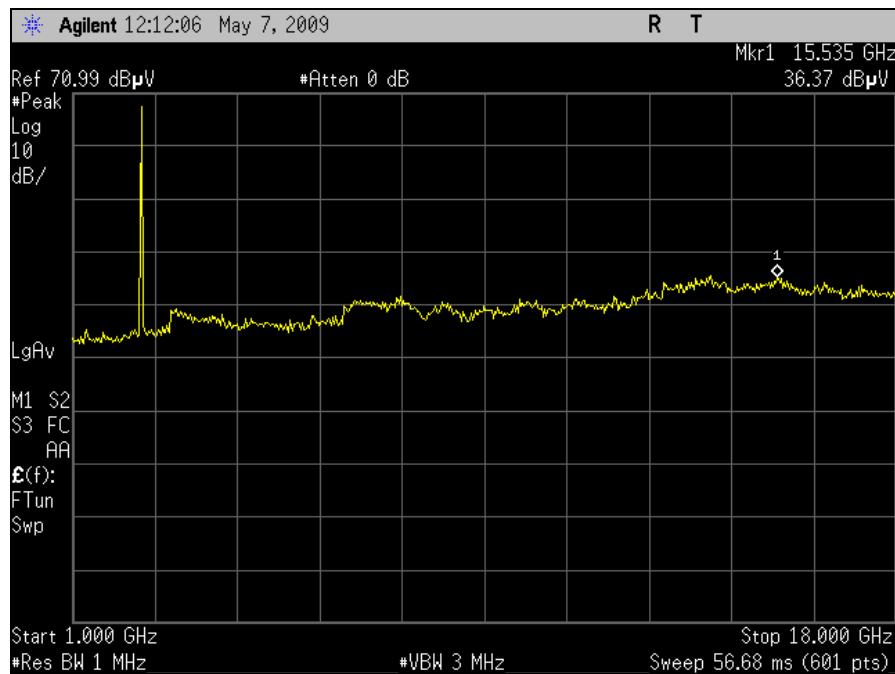

Plot 55. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11b 6dBi Omni Antenna

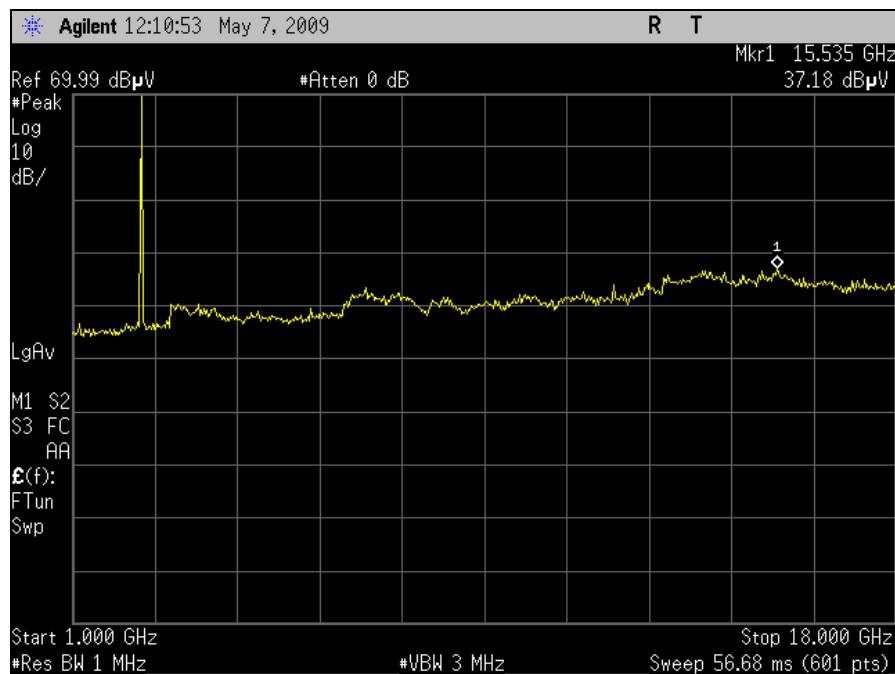


Plot 56. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11b 6dBi Omni Antenna

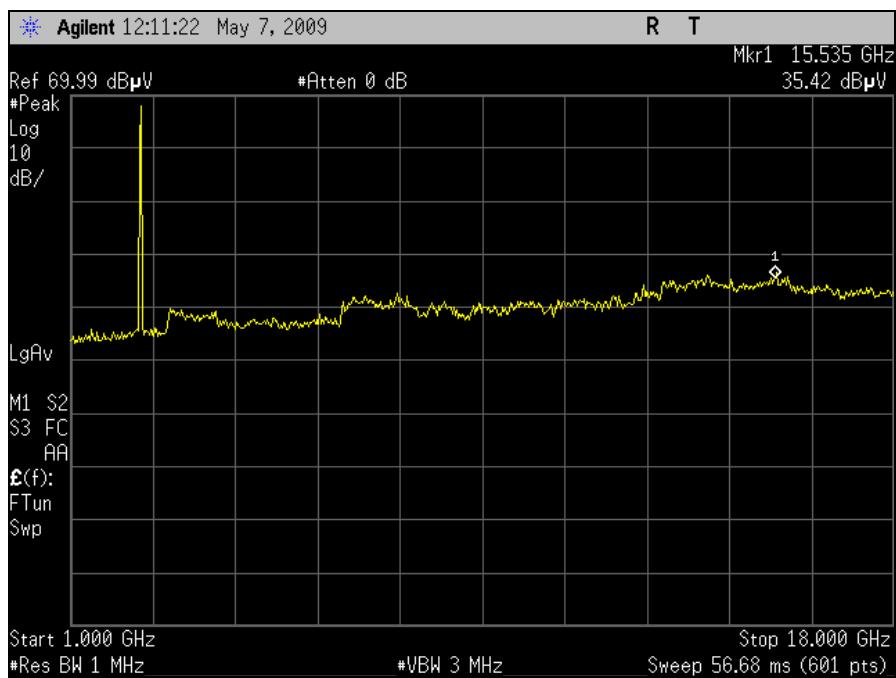


Plot 57. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11b 6dBi Omni Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (6dBi Omni Antenna)

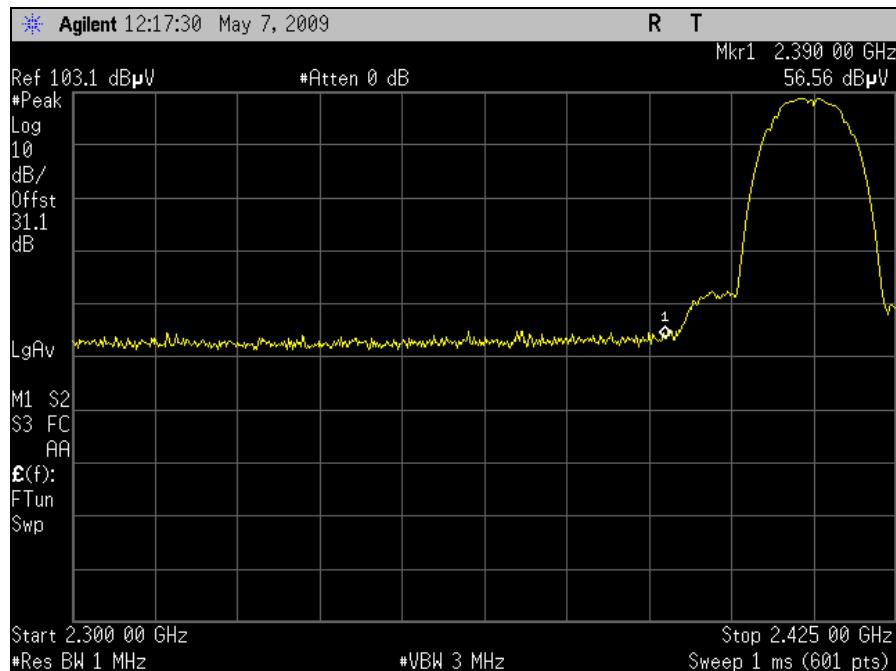


Plot 58. Radiated Restricted Band Edge, Low Channel Peak– 802.11b 6dBi Omni Antenna

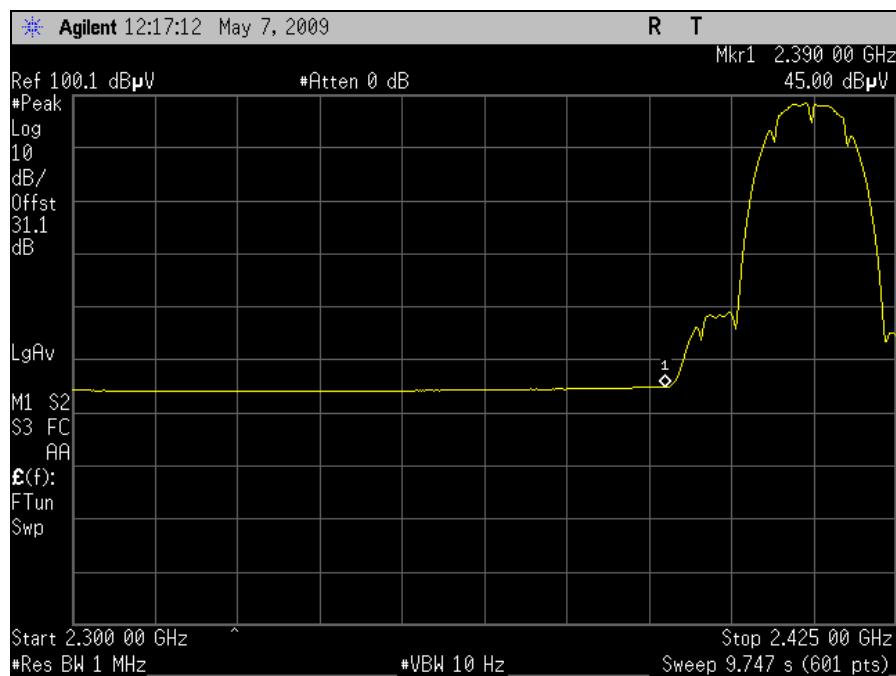


Plot 59. Radiated Restricted Band Edge, Low Channel Avg– 802.11b 6dBi Omni Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (6dBi Omni Antenna)

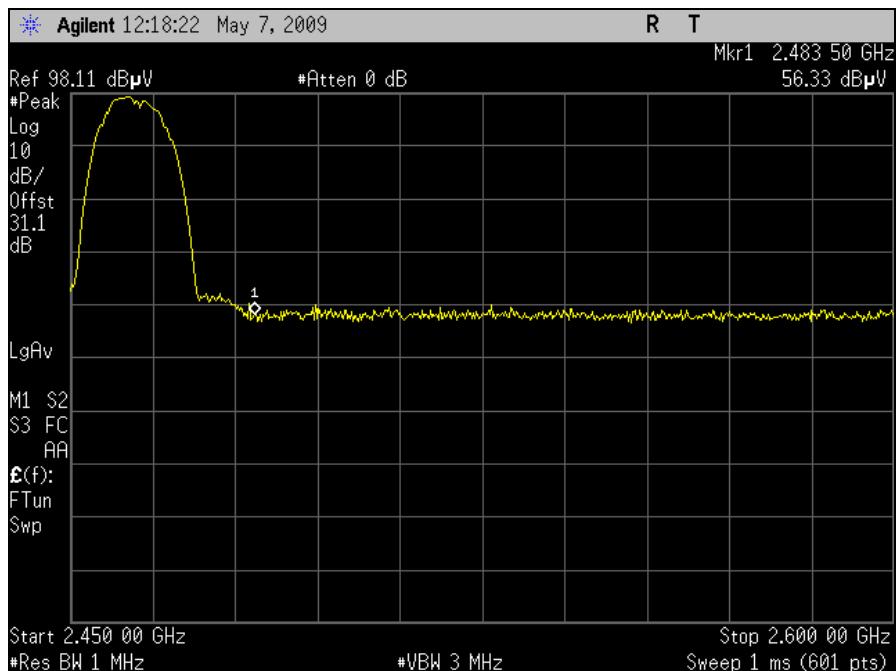

Plot 60. Radiated Restricted Band Edge, High Channel Peak– 802.11b 6dBi Omni Antenna

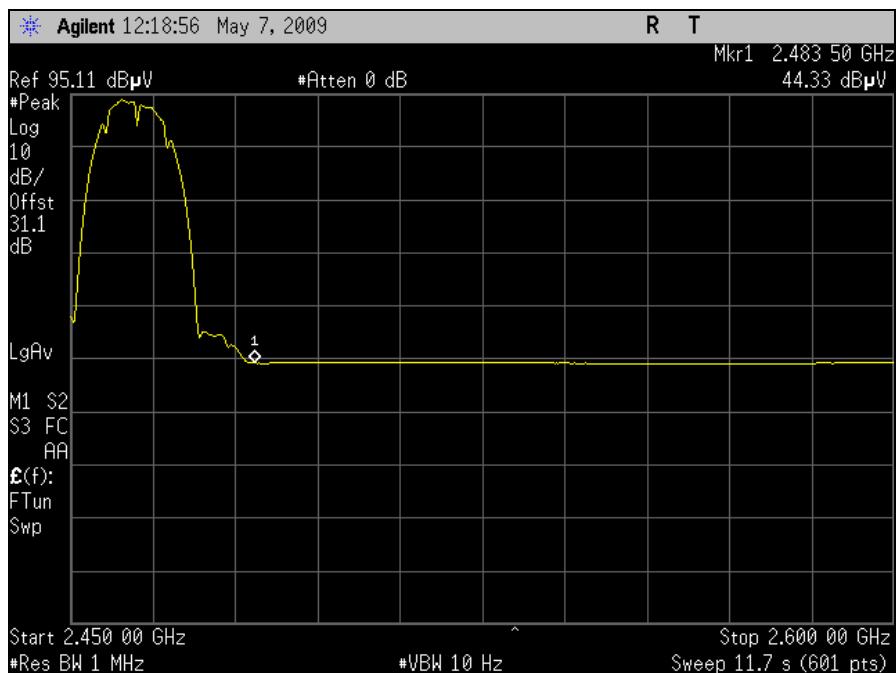

Plot 61. Radiated Restricted Band Edge, High Channel Avg– 802.11b 6dBi Omni Antenna


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b) 16dBi Sector Antenna

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.824	V	49.93	34.76	33.35	4.58	53.10	Peak	74	-20.90
4.824	V	38.43	34.76	33.35	4.58	41.60	Avg	54	-12.40
7.236	V	47.55	35.01	35.73	5.90	54.18	Peak	74	-19.82
7.236	V	32.44	35.01	35.73	5.90	39.07	Avg	54	-14.93
9.648	V	46.58	35.58	37.83	7.22	56.06	Peak	74	-17.94
9.648	V	33.44	35.58	37.83	7.22	42.92	Avg	54	-11.08
12.06	V	45.21	35.00	39.82	6.67	56.70	Peak	74	-17.30
12.06	V	32.41	35.00	39.82	6.67	43.90	Avg	54	-10.10
Low Channel 2412 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.874	V	48.23	34.74	33.50	4.63	51.62	Peak	74	-22.38
4.874	V	41.84	34.74	33.50	4.63	45.23	Avg	54	-8.77
7.311	V	46.95	35.02	35.95	6.31	54.18	Peak	74	-19.82
7.311	V	33.03	35.02	35.95	6.31	40.26	Avg	54	-13.74
9.748	V	47.11	35.55	37.95	7.16	56.67	Peak	74	-17.33
9.748	V	33.52	35.55	37.95	7.16	43.08	Avg	54	-10.92
12.185	V	47.82	34.94	39.53	7.11	59.52	Peak	74	-14.48
12.185	V	33.31	34.94	39.53	7.11	45.01	Avg	54	-8.99
Mid Channel 2437 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.924	V	47.66	34.73	33.64	4.68	51.24	Peak	74	-22.76
4.924	V	40.04	34.73	33.64	4.68	43.62	Avg	54	-10.38
7.386	V	47.31	35.05	36.15	6.66	55.07	Peak	74	-18.93
7.386	V	34.31	35.05	36.15	6.66	42.07	Avg	54	-11.93
9.848	V	46.93	35.54	38.07	7.08	56.53	Peak	74	-17.47
9.848	V	33.82	35.54	38.07	7.08	43.42	Avg	54	-10.58
12.31	V	47.83	34.83	39.19	7.72	59.91	Peak	74	-14.09
12.31	V	33.57	34.83	39.19	7.72	45.65	Avg	54	-8.35
High Channel 2462 MHz									


Table 42. Radiated Harmonic Emissions Test Results, 802.11b Mode (16dBi Sector Antenna)

Note: All other emissions were measured at the noise floor of the spectrum analyzer


§ 15.247(d) Radiated Spurious Emissions – 802.11b (16dBi Sector Antenna)

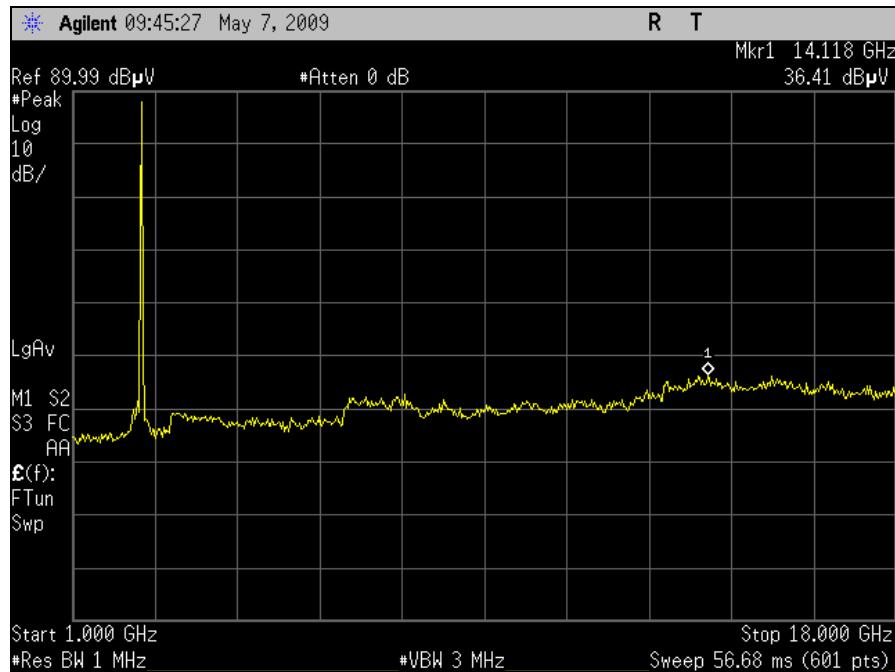

Plot 62. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11b 16dBi Sector Antenna

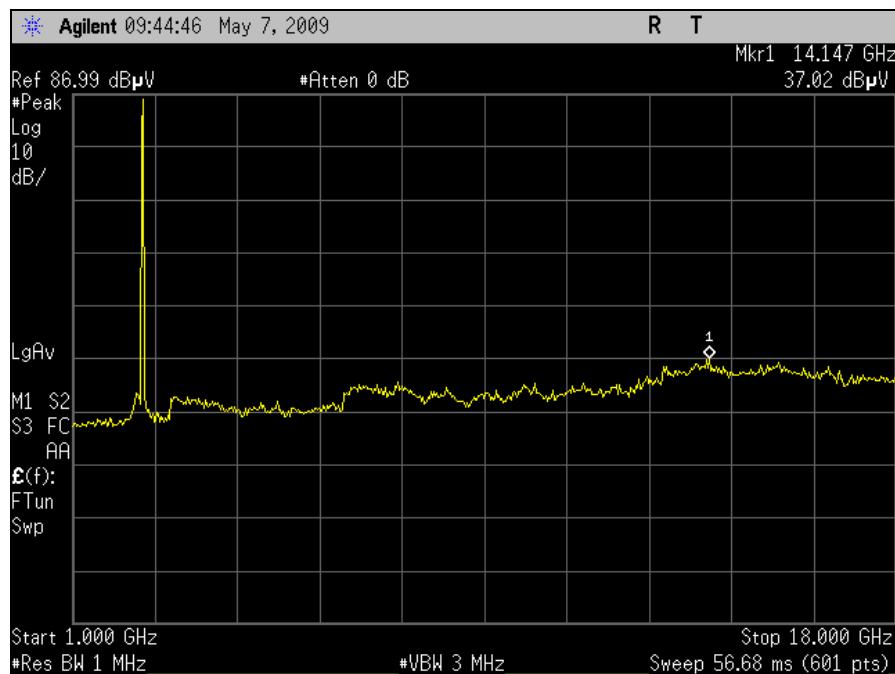


Plot 63. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11b 16dBi Sector Antenna

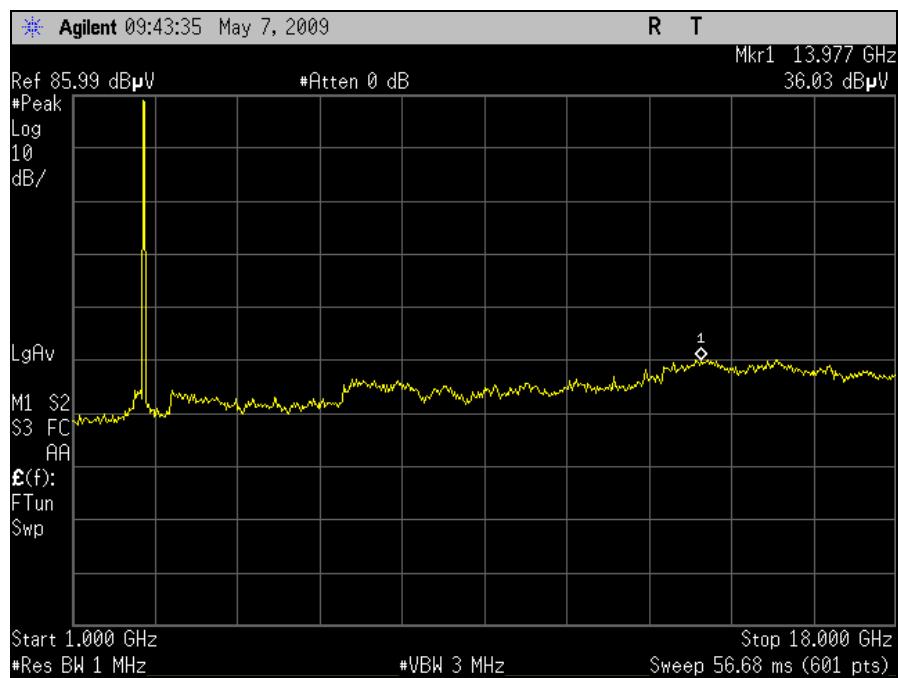


Plot 64. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11b 16dBi Sector Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (16dBi Sector Antenna)

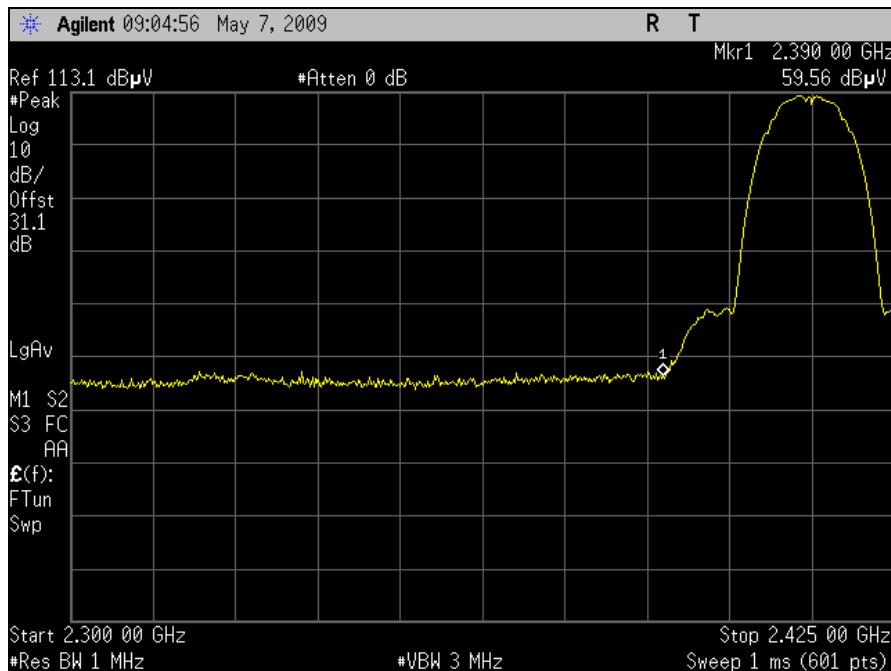


Plot 65. Radiated Restricted Band Edge, Channel 1 Peak– 802.11b 16dBi Sector Antenna (Lower Power)

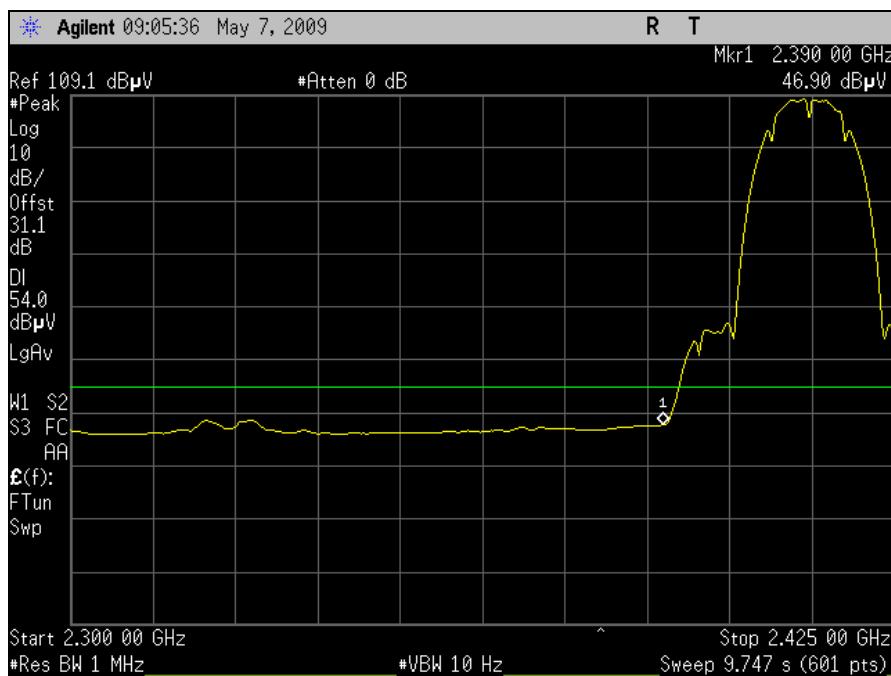


Plot 66. Radiated Restricted Band Edge, Channel 1 Avg.– 802.11b 16dBi Sector Antenna (Lower Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (16dBi Sector Antenna)

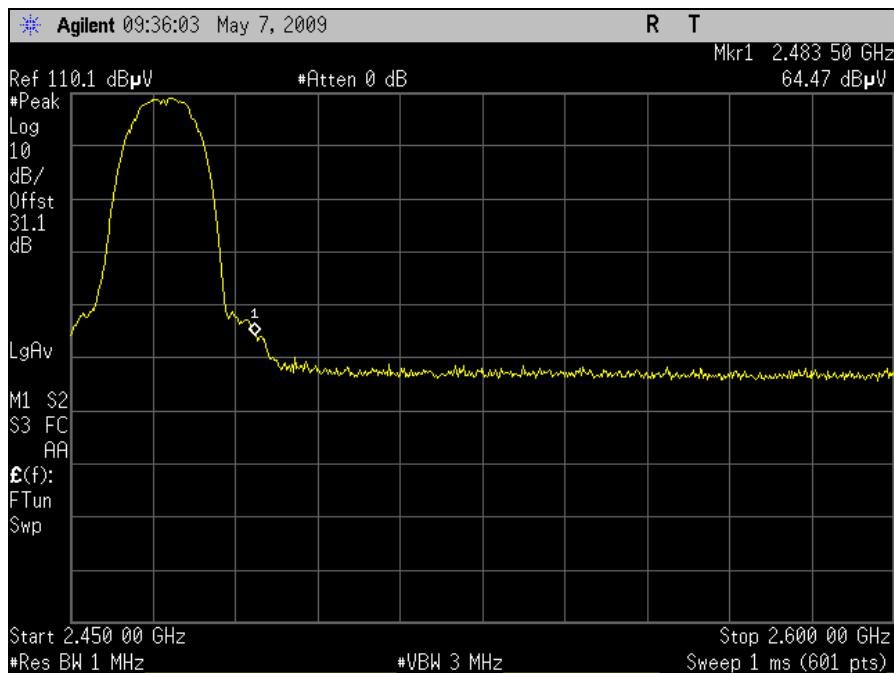


Plot 67. Radiated Restricted Band Edge, Channel 12 Peak—802.11b 16dBi Sector Antenna (Lower Power)

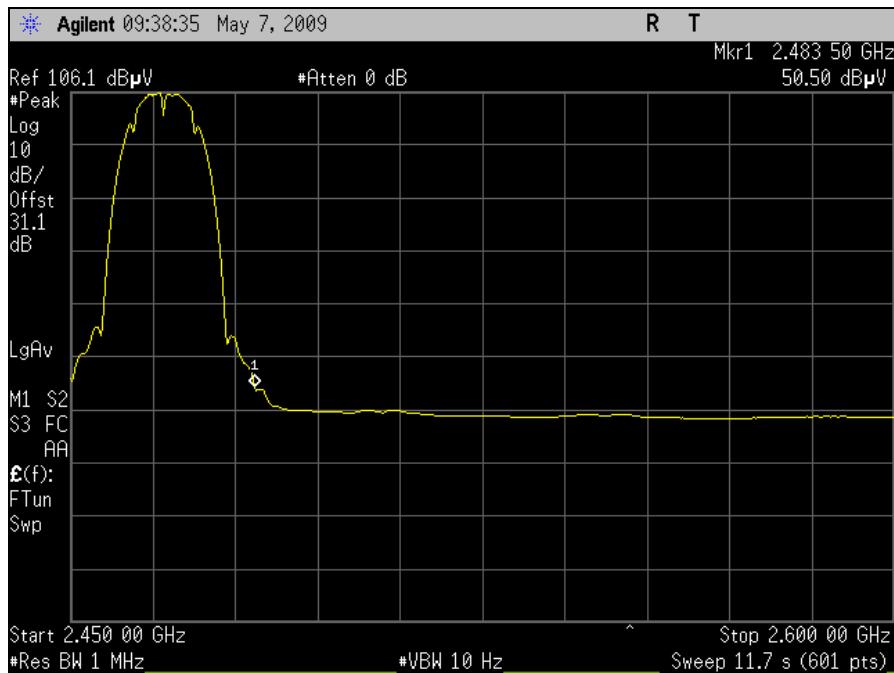


Plot 68. Radiated Restricted Band Edge, Channel 12 Avg.—802.11b 16dBi Sector Antenna (Lower Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (16dBi Sector Antenna)

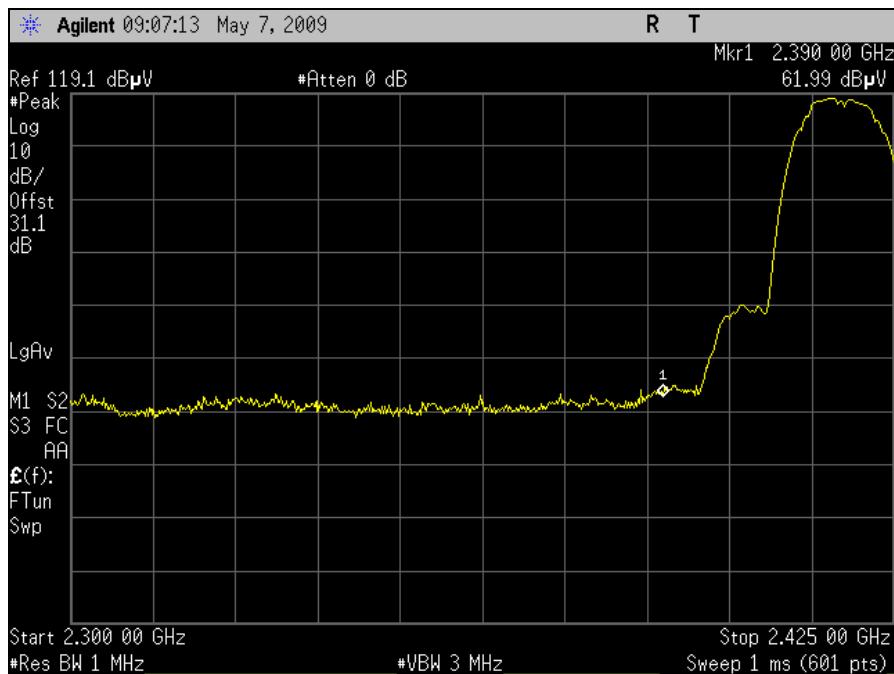


Plot 69. Radiated Restricted Band Edge, Channel 2 Peak– 802.11b 16dBi Sector Antenna (Higher Power)

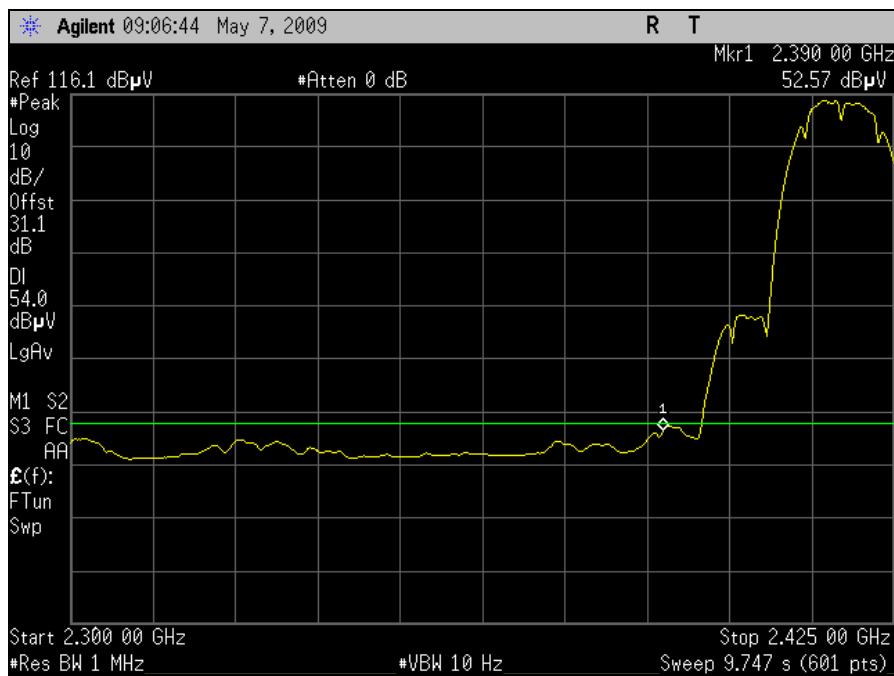


Plot 70. Radiated Restricted Band Edge, Channel 2 Avg.– 802.11b 16dBi Sector Antenna (Higher Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (16dBi Sector Antenna)

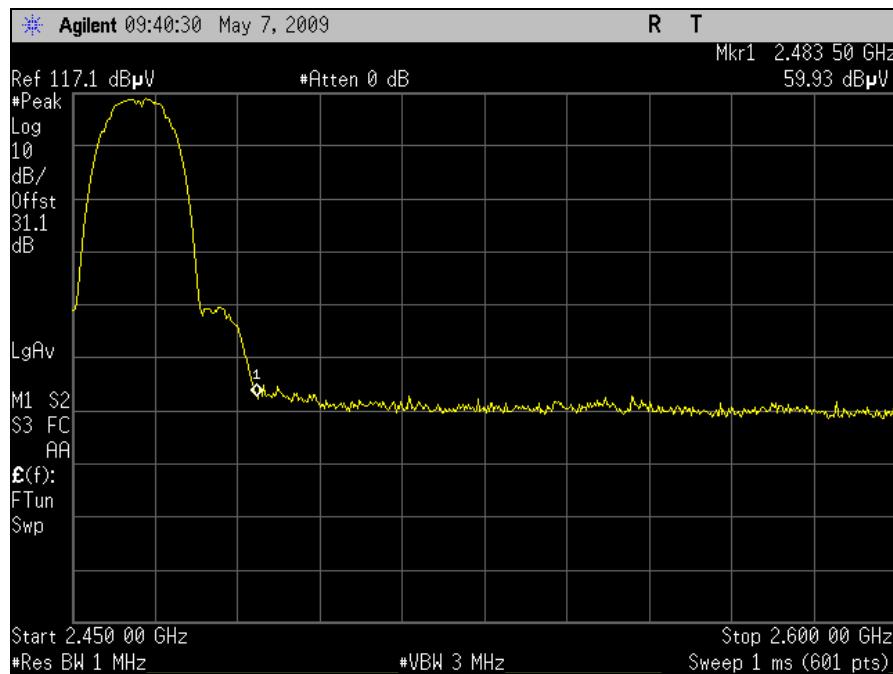

Plot 71. Radiated Restricted Band Edge, Channel 11 Peak– 802.11b 16dBi Sector Antenna (Higher Power)

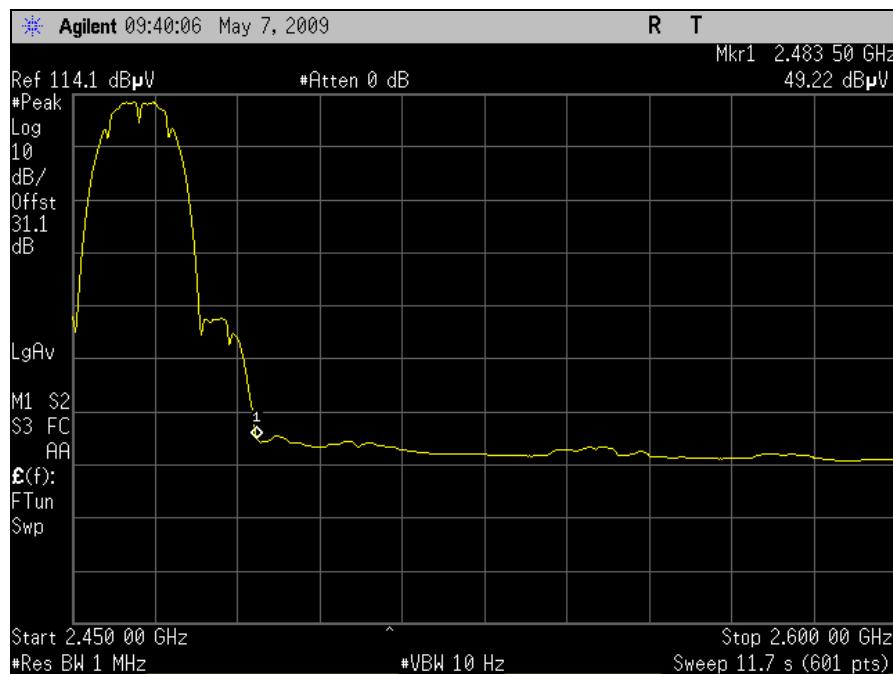

Plot 72. Radiated Restricted Band Edge, Channel 11 Avg.– 802.11b 16dBi Sector Antenna (Higher Power)


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b) 18dBi Panel Antenna

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.824	V	50.26	34.76	33.35	4.58	53.43	Peak	74	-20.57
4.824	V	45.27	34.76	33.35	4.58	48.44	Avg	54	-5.56
7.236	V	47.29	35.01	35.73	5.90	53.92	Peak	74	-20.08
7.236	V	33.46	35.01	35.73	5.90	40.09	Avg	54	-13.91
9.648	V	47.41	35.58	37.83	7.22	56.89	Peak	74	-17.11
9.648	V	33.4	35.58	37.83	7.22	42.88	Avg	54	-11.12
12.06	V	47.11	35.00	39.82	6.67	58.60	Peak	74	-15.40
12.06	V	33.93	35.00	39.82	6.67	45.42	Avg	54	-8.58
Low Channel 2412 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.874	V	48.26	34.74	33.50	4.63	51.65	Peak	74	-22.35
4.874	V	41.74	34.74	33.50	4.63	45.13	Avg	54	-8.87
7.311	V	46.93	35.02	35.95	6.31	54.16	Peak	74	-19.84
7.311	V	33.09	35.02	35.95	6.31	40.32	Avg	54	-13.68
9.748	V	47.31	35.55	37.95	7.16	56.87	Peak	74	-17.13
9.748	V	33.38	35.55	37.95	7.16	42.94	Avg	54	-11.06
12.185	V	46.88	34.94	39.53	7.11	58.58	Peak	74	-15.42
12.185	V	33.1	34.94	39.53	7.11	44.80	Avg	54	-9.20
Mid Channel 2437 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.924	V	46.17	34.73	33.64	4.68	49.75	Peak	74	-24.25
4.924	V	35.4	34.73	33.64	4.68	38.98	Avg	54	-15.02
7.386	V	46.68	35.05	36.15	6.66	54.44	Peak	74	-19.56
7.386	V	32.89	35.05	36.15	6.66	40.65	Avg	54	-13.35
9.848	V	47.21	35.54	38.07	7.08	56.81	Peak	74	-17.19
9.848	V	33.42	35.54	38.07	7.08	43.02	Avg	54	-10.98
12.31	V	47.94	34.83	39.19	7.72	60.02	Peak	74	-13.98
12.31	V	33.65	34.83	39.19	7.72	45.73	Avg	54	-8.27
High Channel 2462 MHz									


Table 43. Radiated Harmonic Emissions Test Results, 802.11b Mode (18dBi Panel Antenna)

Note: All other emissions were measured at the noise floor of the spectrum analyzer


§ 15.247(d) Radiated Spurious Emissions – 802.11b (18dBi Panel Antenna)

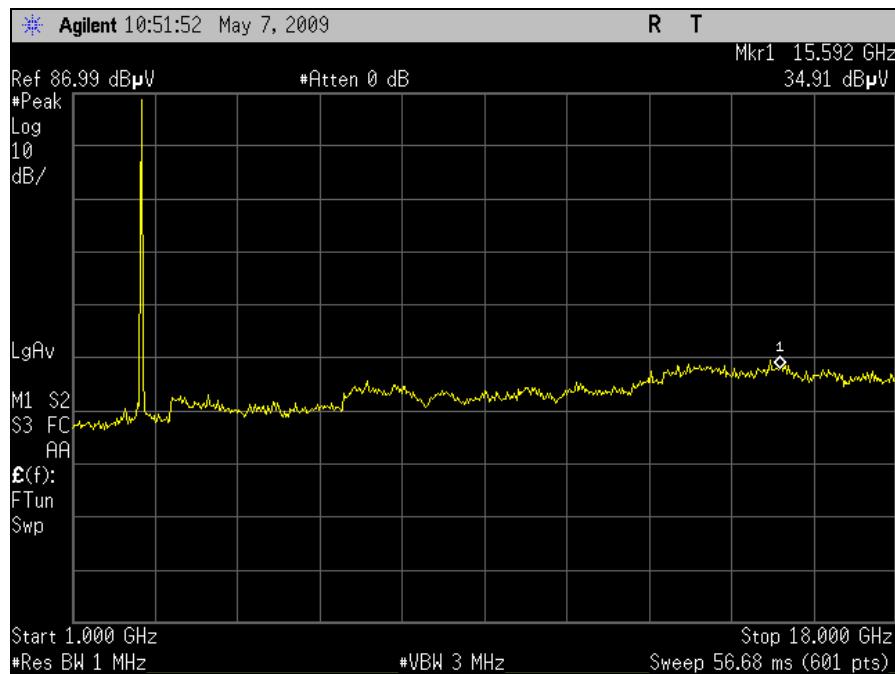

Plot 73. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11b 18dBi Panel Antenna

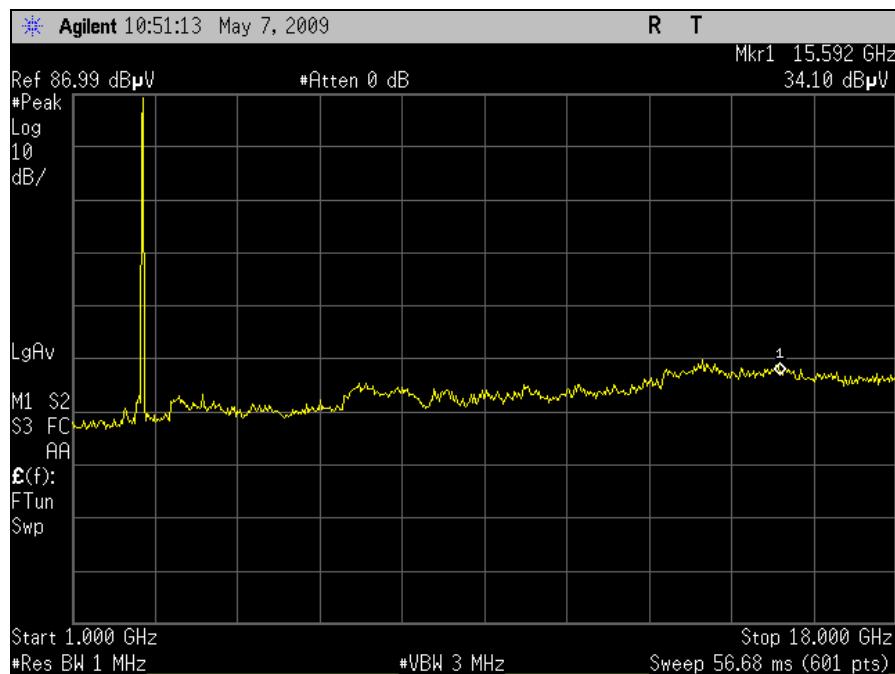


Plot 74. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11b 18dBi Panel Antenna

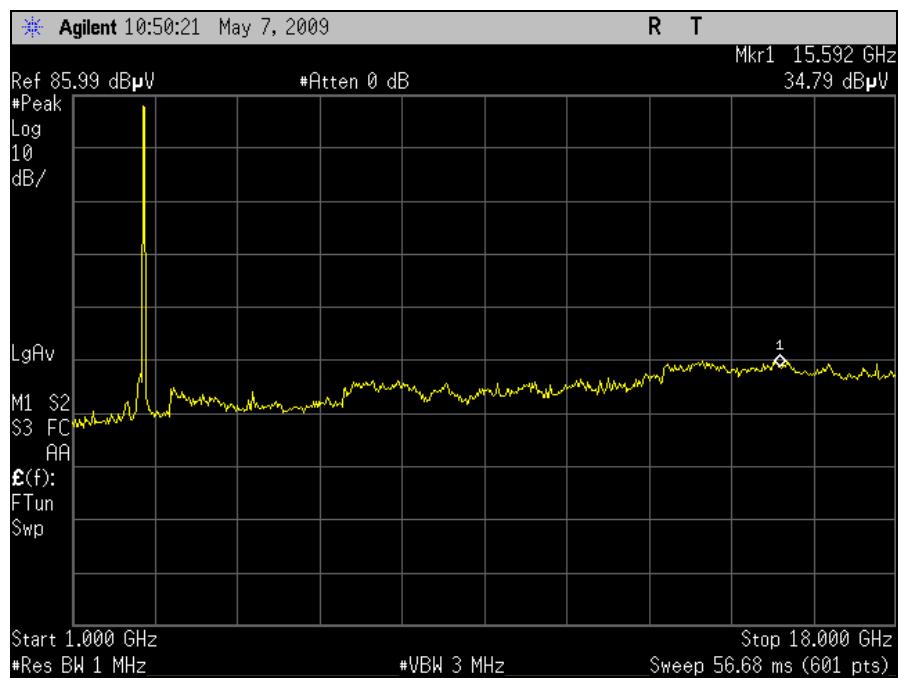


Plot 75. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11b 18dBi Panel Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (18dBi Panel Antenna)

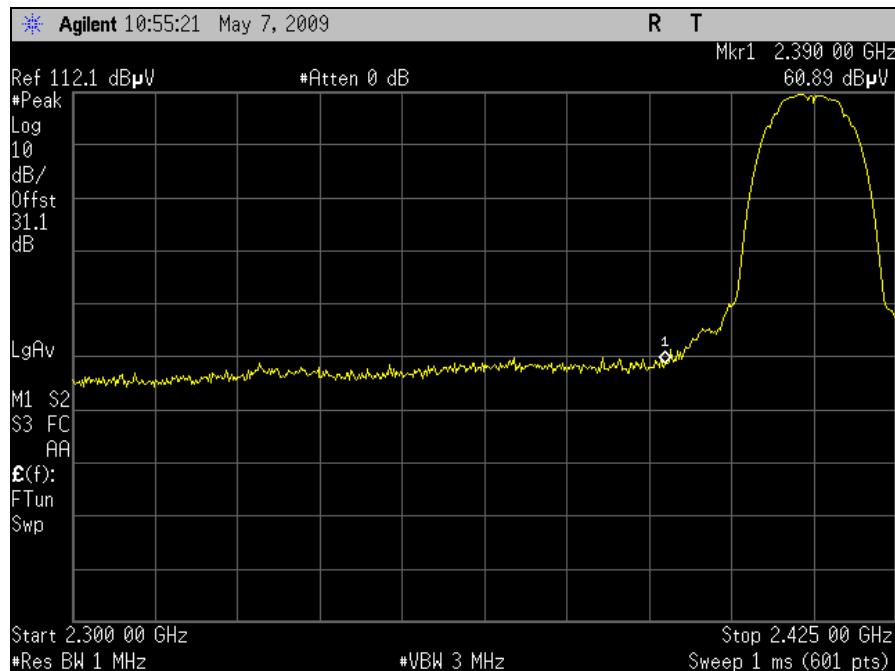


Plot 76. Radiated Restricted Band Edge, Channel 1 Peak– 802.11b 18dBi Panel Antenna (Lower Power)

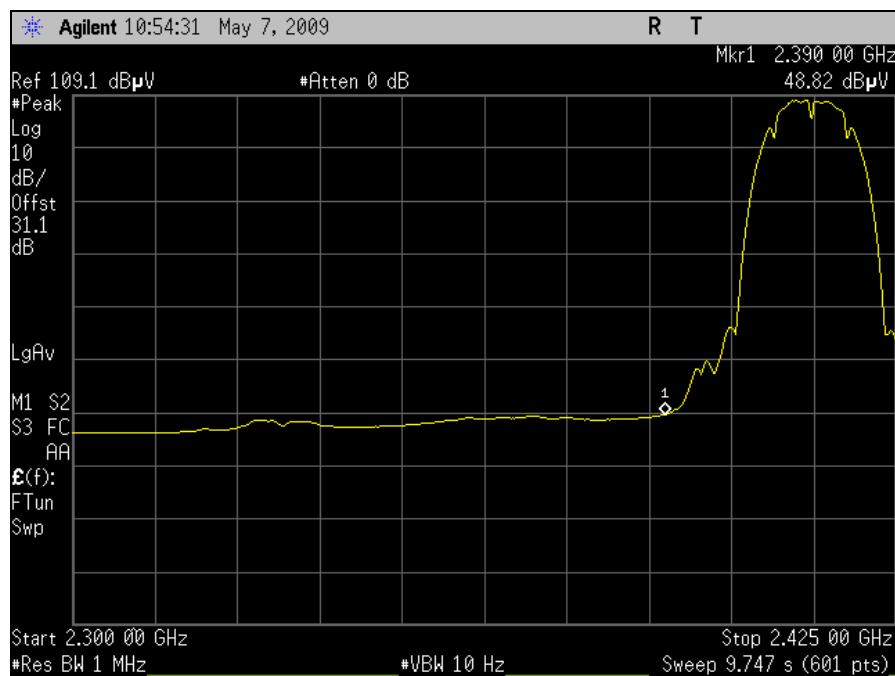


Plot 77. Radiated Restricted Band Edge, Channel 1 Avg.– 802.11b 18dBi Panel Antenna(Lower Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (18dBi Panel Antenna)

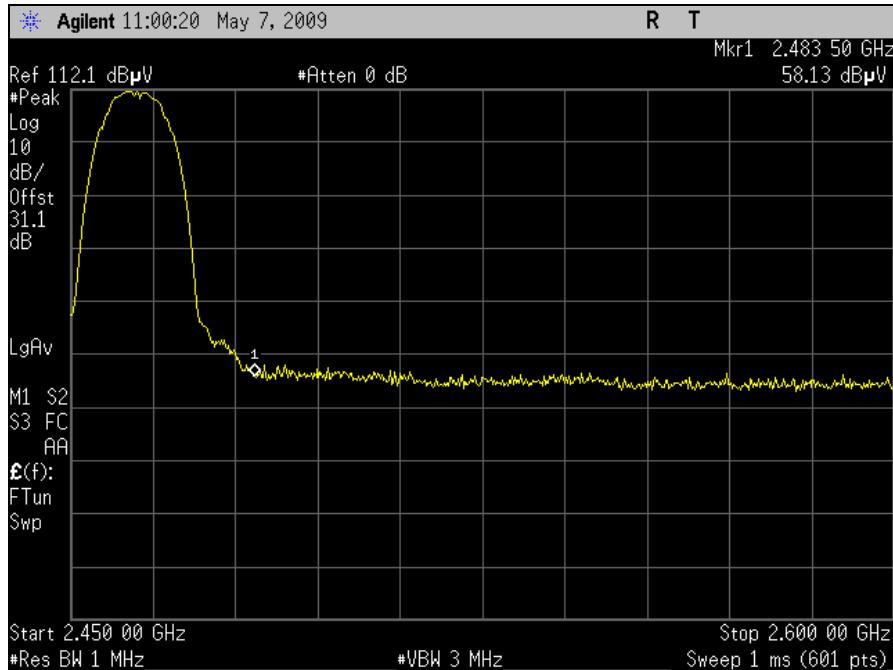


Plot 78. Radiated Restricted Band Edge, Channel 12 Peak– 802.11b 18dBi Panel Antenna(Lower Power)

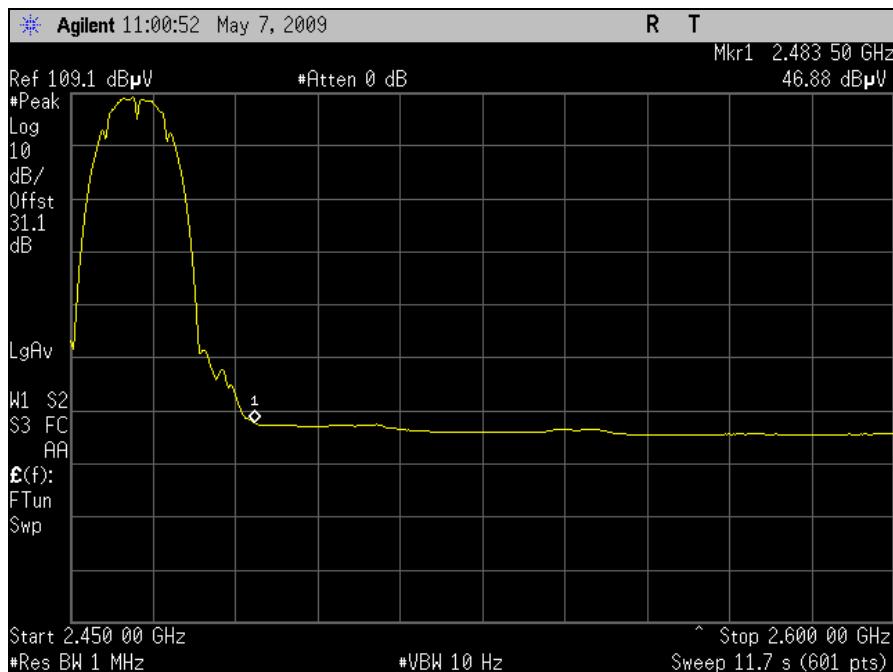


Plot 79. Radiated Restricted Band Edge, Channel 12 Avg.– 802.11b 18dBi Panel Antenna(Lower Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (18dBi Panel Antenna)

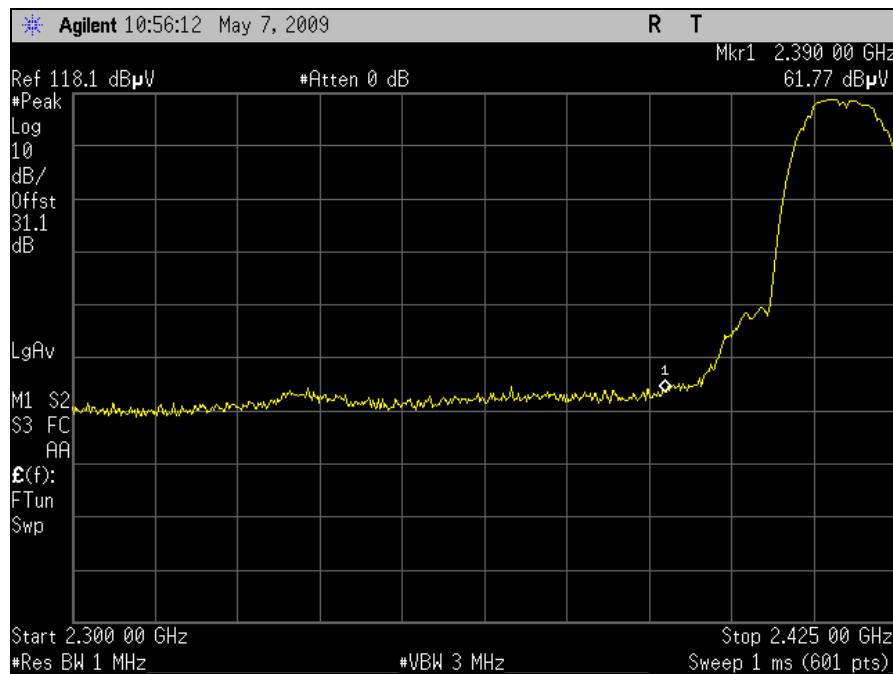


Plot 80. Radiated Restricted Band Edge, Channel 2 Peak– 802.11b 18dBi Panel Antenna (Higher Power)

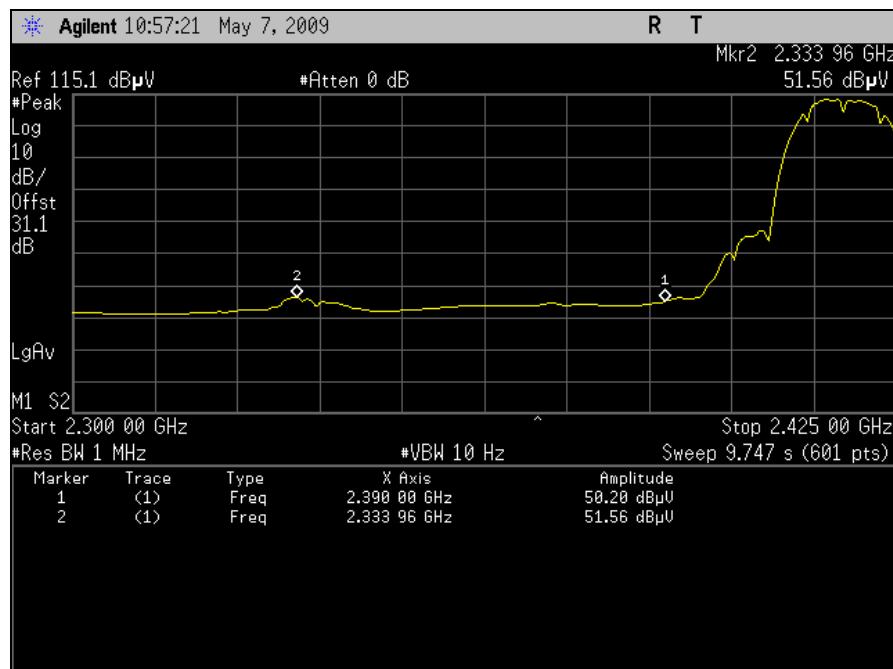


Plot 81. Radiated Restricted Band Edge, Channel 2 Avg.– 802.11b 18dBi Panel Antenna(Higher Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (18dBi Panel Antenna)

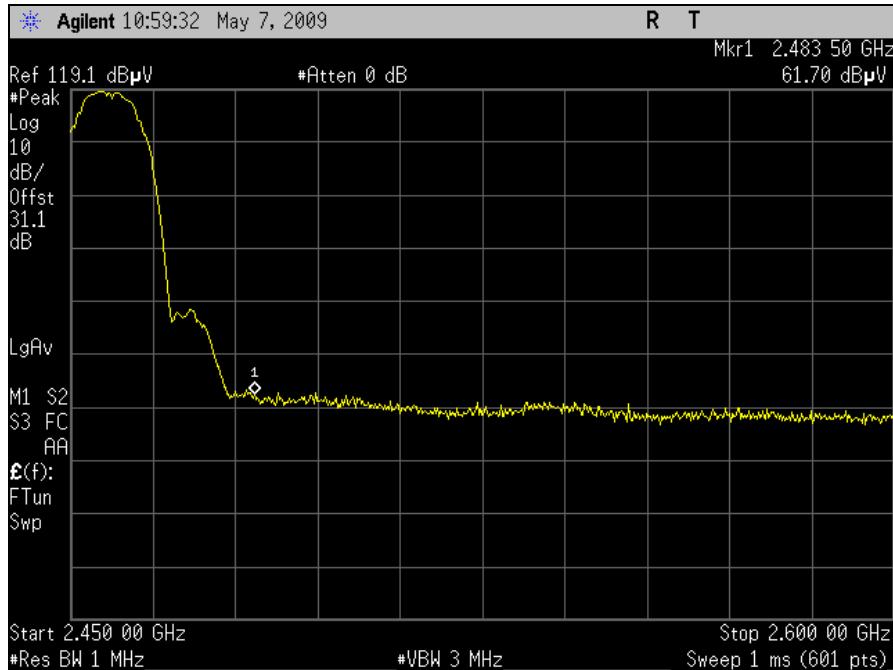

Plot 82. Radiated Restricted Band Edge, Channel 11 Peak – 802.11b 18dBi Panel Antenna(Higher Power)

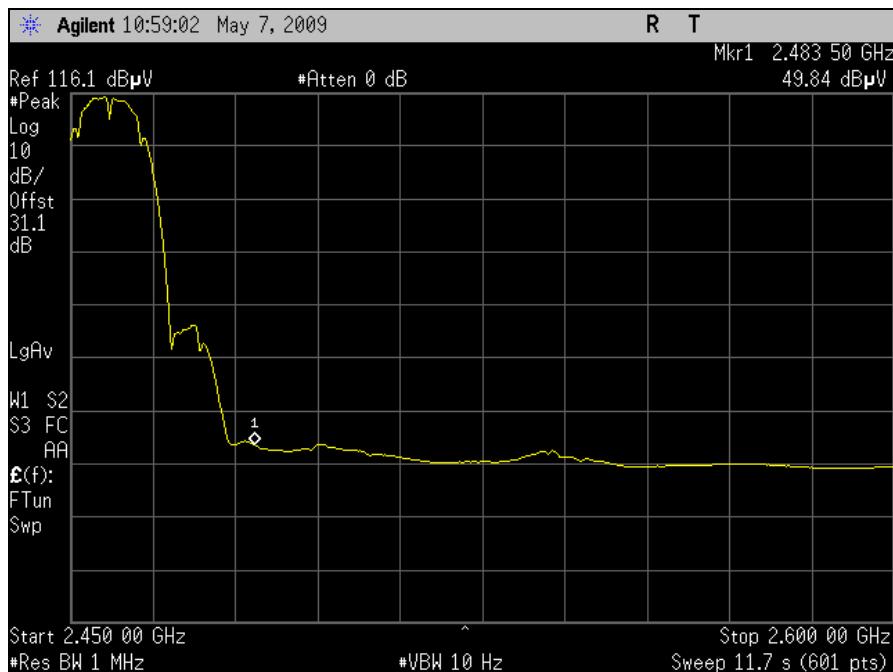

Plot 83. Radiated Restricted Band Edge, Channel 11 Avg.– 802.11b 18dBi Panel Antenna(Higher Power)


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b) 25dBi Grid Antenna

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.824	V	45.46	34.76	33.35	4.58	48.63	Peak	74	-25.37
4.824	V	31.35	34.76	33.35	4.58	34.52	Avg	54	-19.48
7.236	V	46.58	35.01	35.73	5.90	53.21	Peak	74	-20.79
7.236	V	32.55	35.01	35.73	5.90	39.18	Avg	54	-14.82
9.648	V	46.73	35.58	37.83	7.22	56.21	Peak	74	-17.79
9.648	V	32.62	35.58	37.83	7.22	42.10	Avg	54	-11.90
12.06	V	45.13	35.00	39.82	6.67	56.62	Peak	74	-17.38
12.06	V	32.2	35.00	39.82	6.67	43.69	Avg	54	-10.31
Low Channel 2412 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.874	V	45.27	34.74	33.50	4.63	48.66	Peak	74	-25.34
4.874	V	30.9	34.74	33.50	4.63	34.29	Avg	54	-19.71
7.311	V	47	35.02	35.95	6.31	54.23	Peak	74	-19.77
7.311	V	32.27	35.02	35.95	6.31	39.50	Avg	54	-14.50
9.748	V	46.03	35.55	37.95	7.16	55.59	Peak	74	-18.41
9.748	V	32.78	35.55	37.95	7.16	42.34	Avg	54	-11.66
12.185	V	45.85	34.94	39.53	7.11	57.55	Peak	74	-16.45
12.185	V	32.2	34.94	39.53	7.11	43.90	Avg	54	-10.10
Mid Channel 2437 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.924	V	44.74	34.73	33.64	4.68	48.32	Peak	74	-25.68
4.924	V	30.95	34.73	33.64	4.68	34.53	Avg	54	-19.47
7.386	V	45.14	35.05	36.15	6.66	52.90	Peak	74	-21.10
7.386	V	32.25	35.05	36.15	6.66	40.01	Avg	54	-13.99
9.848	V	45.52	35.54	38.07	7.08	55.12	Peak	74	-18.88
9.848	V	32.57	35.54	38.07	7.08	42.17	Avg	54	-11.83
12.31	V	45.21	34.83	39.19	7.72	57.29	Peak	74	-16.71
12.31	V	32.09	34.83	39.19	7.72	44.17	Avg	54	-9.83
High Channel 2462 MHz									


Table 44. Radiated Harmonic Emissions Test Results, 802.11b Mode (25dBi Grid Antenna)

Note: All other emissions were measured at the noise floor of the spectrum analyzer


§ 15.247(d) Radiated Spurious Emissions – 802.11b (25dBi Grid Antenna)

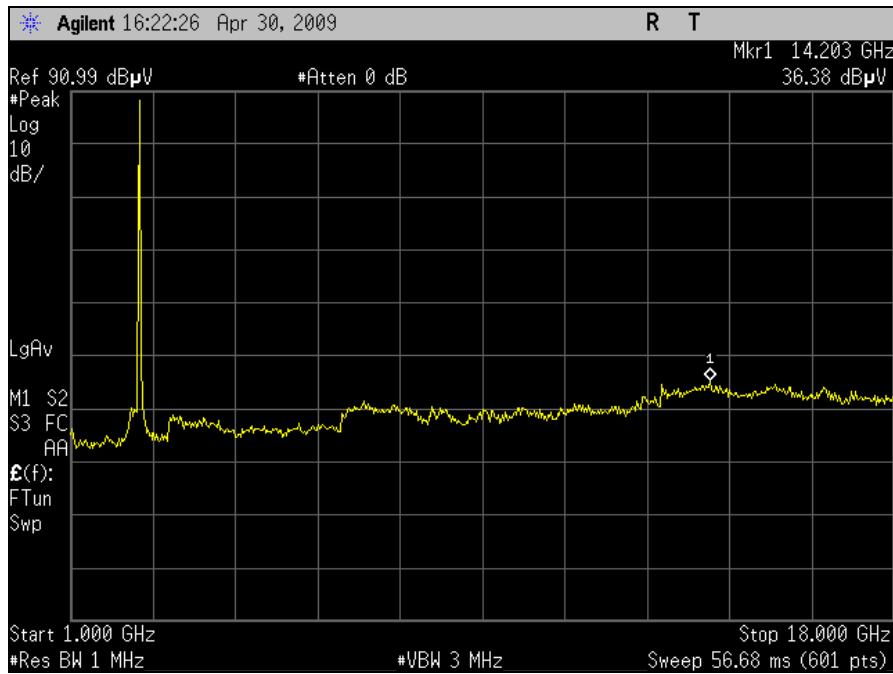

Plot 84. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11b 25dBi Grid Antenna

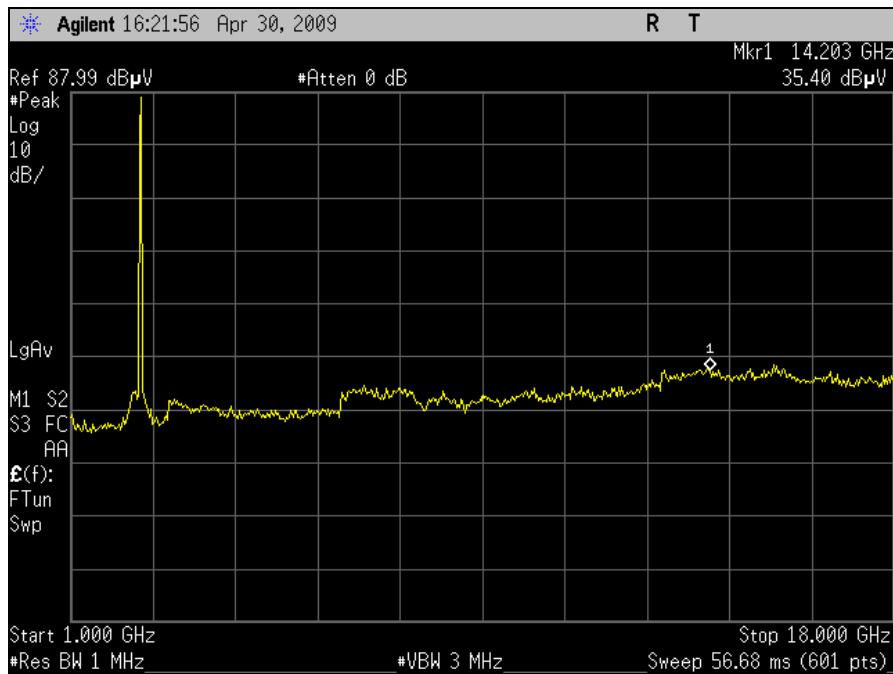


Plot 85. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11b 25dBi Grid Antenna

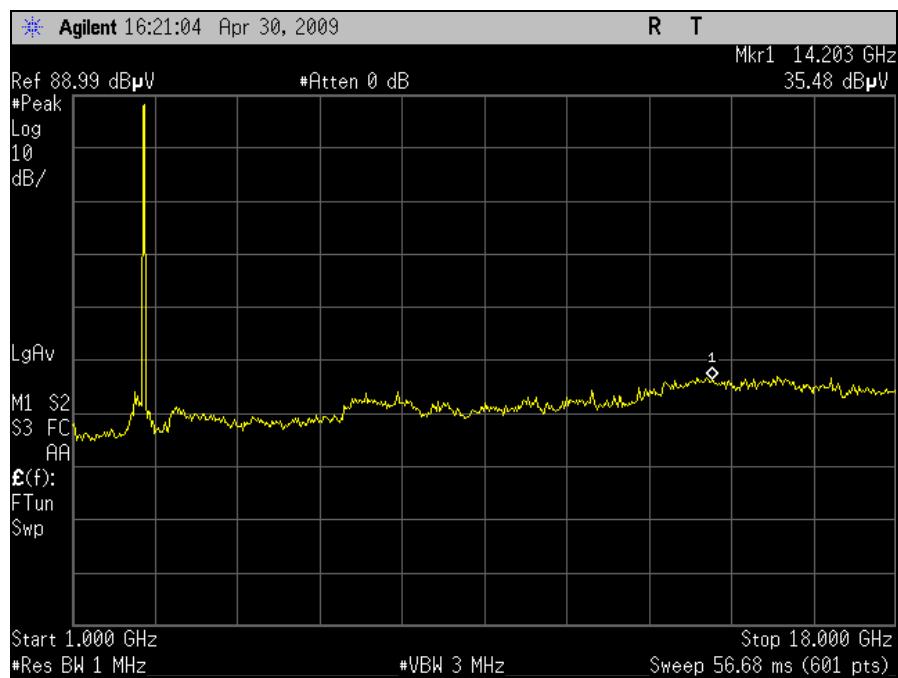


Plot 86. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11b 25dBi Grid Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (25dBi Grid Antenna)

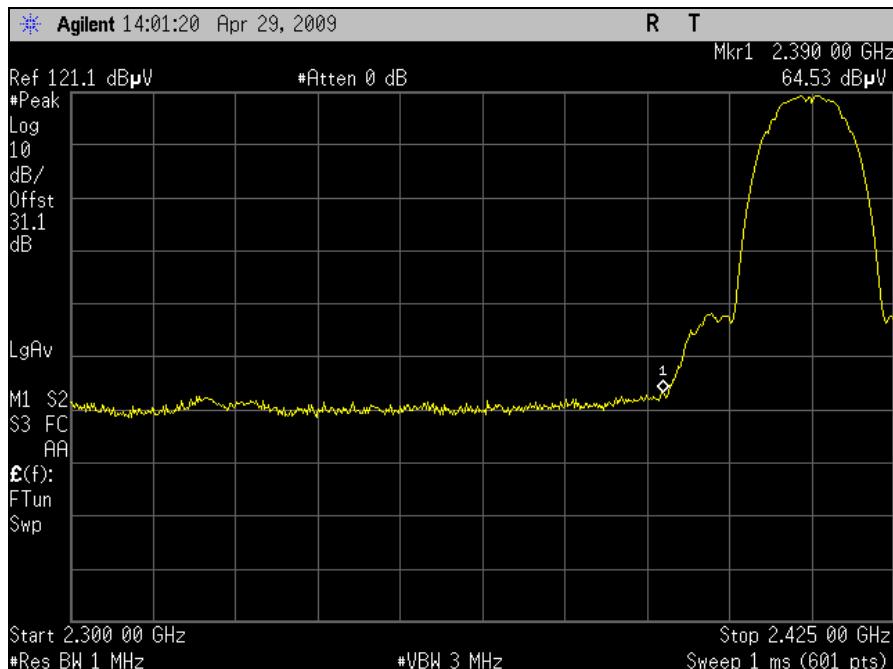


Plot 87. Radiated Restricted Band Edge, Channel 1 Peak– 802.11b 25dBi Grid Antenna (Lower Power)

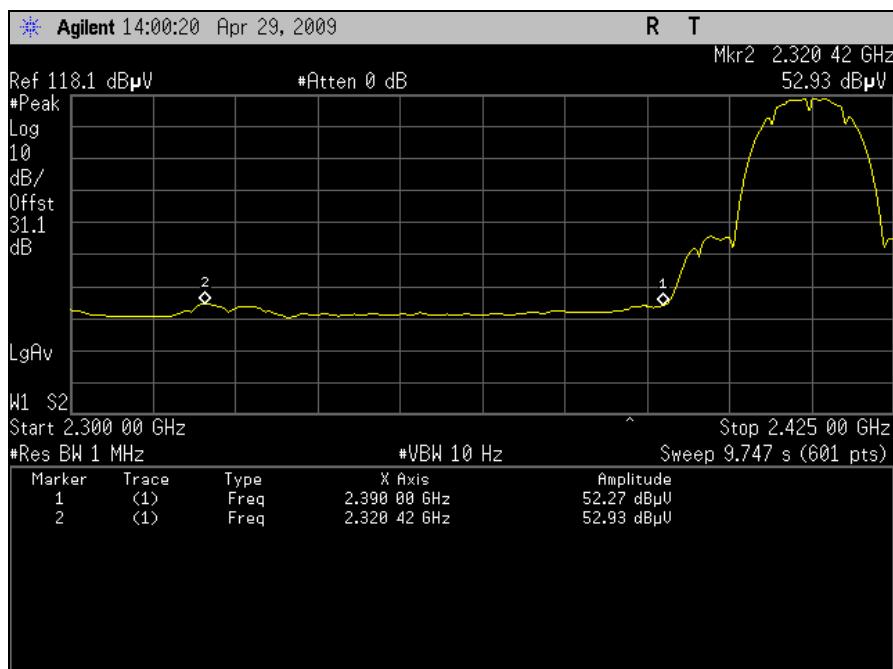


Plot 88. Radiated Restricted Band Edge, Channel 1 Avg.– 802.11b 25dBi Grid Antenna (Lower Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (25dBi Grid Antenna)

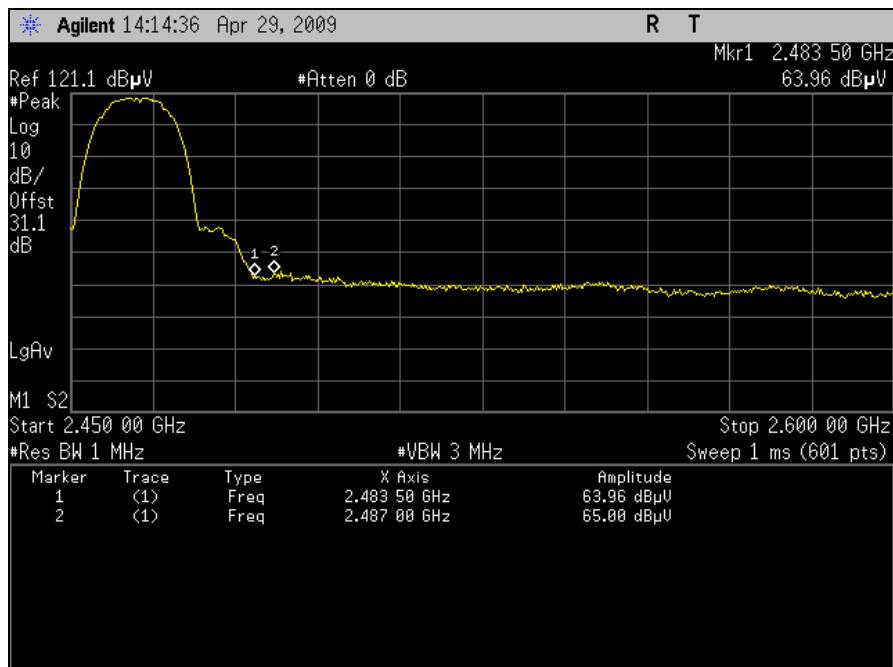


Plot 89. Radiated Restricted Band Edge, Channel 12 Peak– 802.11b 25dBi Grid Antenna (Lower Power)

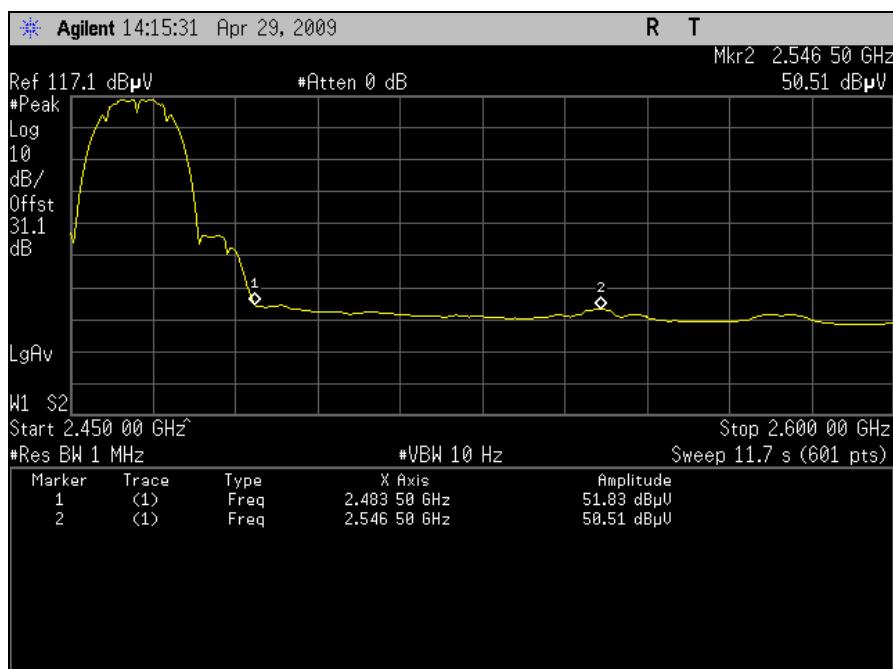


Plot 90. Radiated Restricted Band Edge, Channel 12 Avg.– 802.11b 25dBi Grid Antenna (Lower Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (25dBi Grid Antenna)

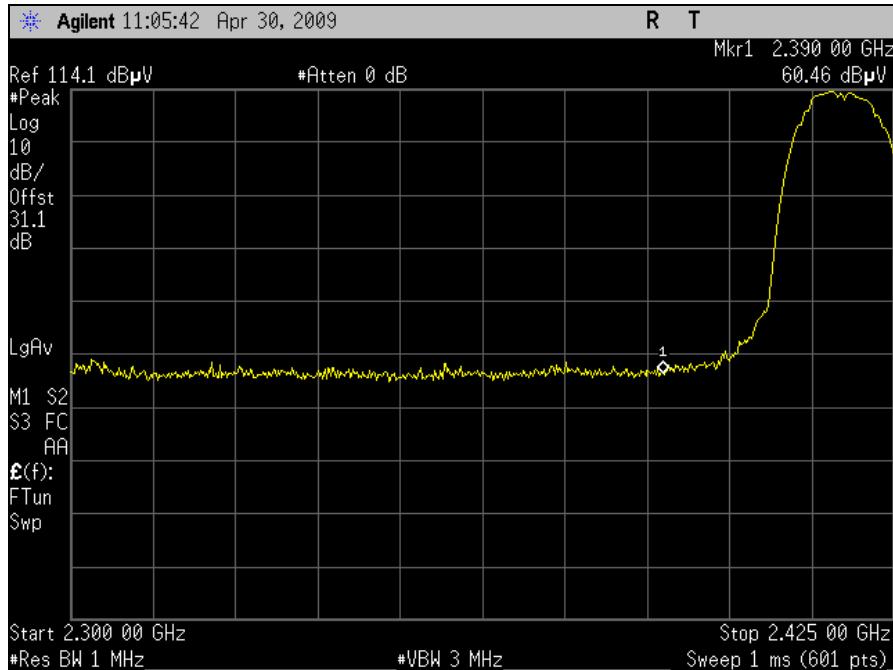


Plot 91. Radiated Restricted Band Edge, Channel 2 Peak– 802.11b 25dBi Grid Antenna (Higher Power)

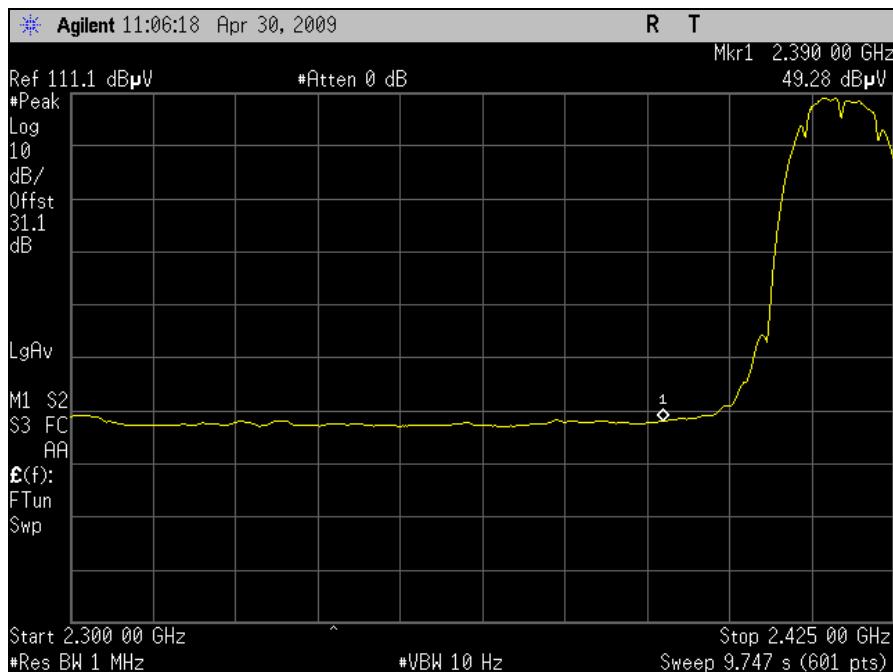


Plot 92. Radiated Restricted Band Edge, Channel 2 Avg.– 802.11b 25dBi Grid Antenna (Higher Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (25dBi Grid Antenna)

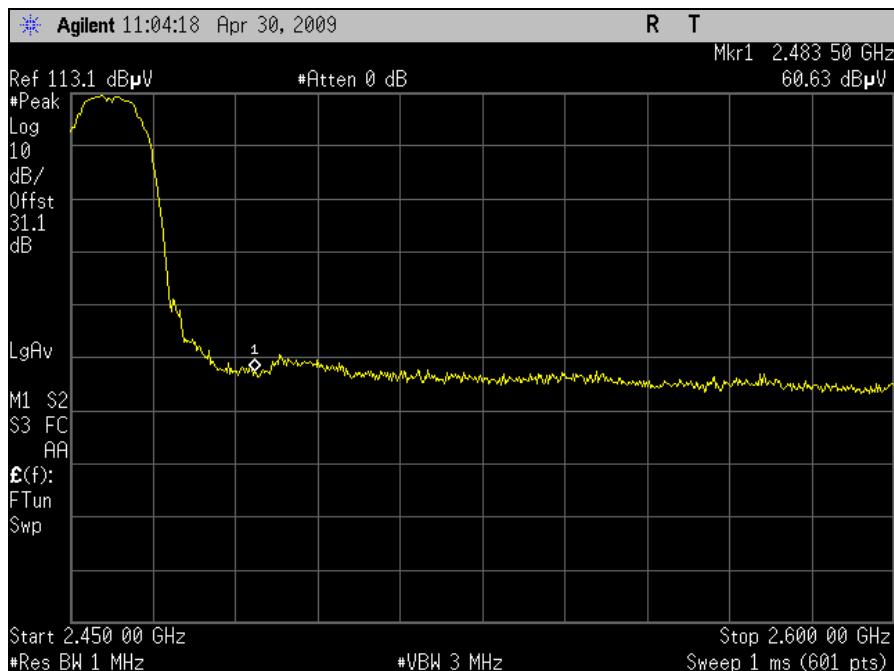


Plot 93. Radiated Restricted Band Edge, Channel 11 Peak– 802.11b 25dBi Grid Antenna (Higher Power)

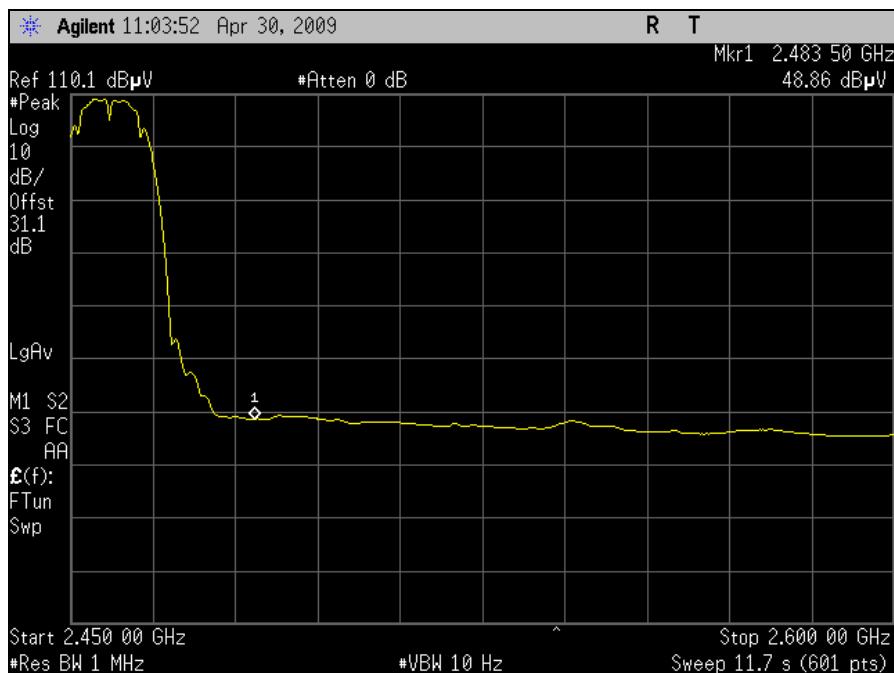


Plot 94. Radiated Restricted Band Edge, Channel 11 Avg.– 802.11b 25dBi Grid Antenna (Higher Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11b (25dBi Grid Antenna)

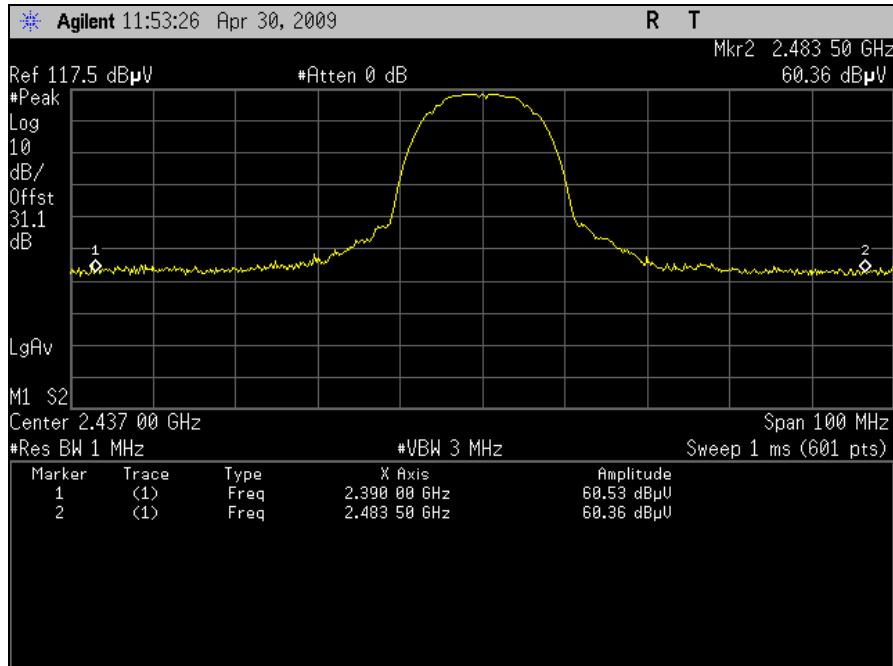

Plot 95. Radiated Restricted Band Edge, Mid Channel Peak– 802.11b 25dBi Grid Antenna

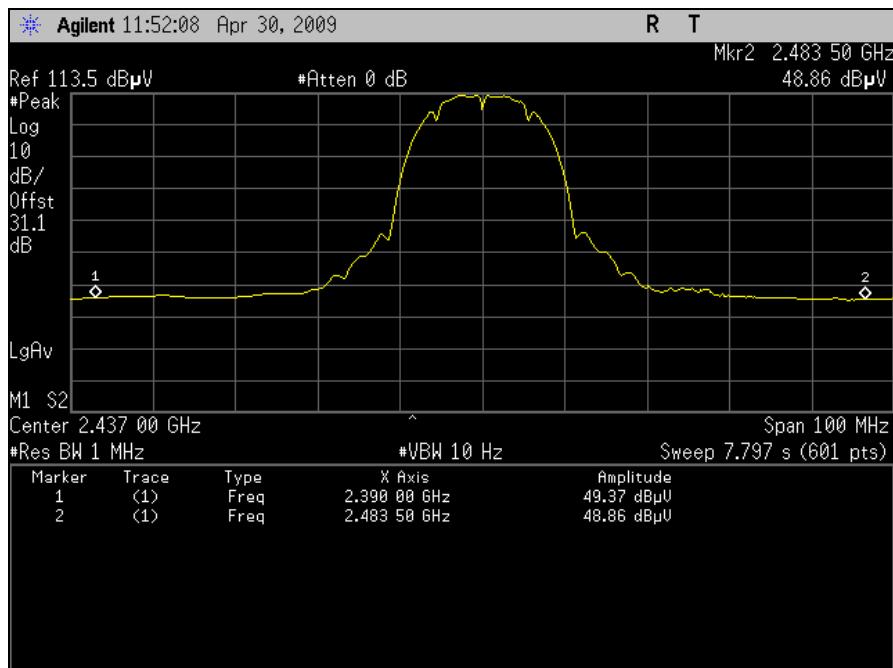

Plot 96. Radiated Restricted Band Edge, Mid Channel Avg– 802.11b 25dBi Grid Antenna

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g) 6dBi Omni Antenna

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.824	V	49.59	34.76	33.35	4.58	52.76	Peak	74	-21.24
4.824	V	34.31	34.76	33.35	4.58	37.48	Avg	54	-16.52
7.236	V	46.05	35.01	35.73	5.90	52.68	Peak	74	-21.32
7.236	V	32.55	35.01	35.73	5.90	39.18	Avg	54	-14.82
9.648	V	46.71	35.58	37.83	7.22	56.19	Peak	74	-17.81
9.648	V	32.67	35.58	37.83	7.22	42.15	Avg	54	-11.85
12.06	V	46.33	35.00	39.82	6.67	57.82	Peak	74	-16.18
12.06	V	33.11	35.00	39.82	6.67	44.60	Avg	54	-9.40
Low Channel 2412 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.874	V	47.71	34.74	33.50	4.63	51.10	Peak	74	-22.90
4.874	V	33.41	34.74	33.50	4.63	36.80	Avg	54	-17.20
7.311	V	46.12	35.02	35.95	6.31	53.35	Peak	74	-20.65
7.311	V	33.21	35.02	35.95	6.31	40.44	Avg	54	-13.56
9.748	V	46.98	35.55	37.95	7.16	56.54	Peak	74	-17.46
9.748	V	32.21	35.55	37.95	7.16	41.77	Avg	54	-12.23
12.185	V	46.23	34.94	39.53	7.11	57.93	Peak	74	-16.07
12.185	V	33.94	34.94	39.53	7.11	45.64	Avg	54	-8.36
Mid Channel 2437 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.924	V	49.21	34.73	33.64	4.68	52.79	Peak	74	-21.21
4.924	V	36.21	34.73	33.64	4.68	39.79	Avg	54	-14.21
7.386	V	45.21	35.05	36.15	6.66	52.97	Peak	74	-21.03
7.386	V	33.52	35.05	36.15	6.66	41.28	Avg	54	-12.72
9.848	V	46.75	35.54	38.07	7.08	56.35	Peak	74	-17.65
9.848	V	33.12	35.54	38.07	7.08	42.72	Avg	54	-11.28
12.31	V	45.62	34.83	39.19	7.72	57.70	Peak	74	-16.30
12.31	V	32.74	34.83	39.19	7.72	44.82	Avg	54	-9.18
High Channel 2462 MHz									


Table 45. Radiated Harmonic Emissions Test Results, 802.11g Mode (6dBi Omni Antenna)

Note: All other emissions were measured at the noise floor of the spectrum analyzer


§ 15.247(d) Radiated Spurious Emissions – 802.11g (6dBi Omni Antenna)

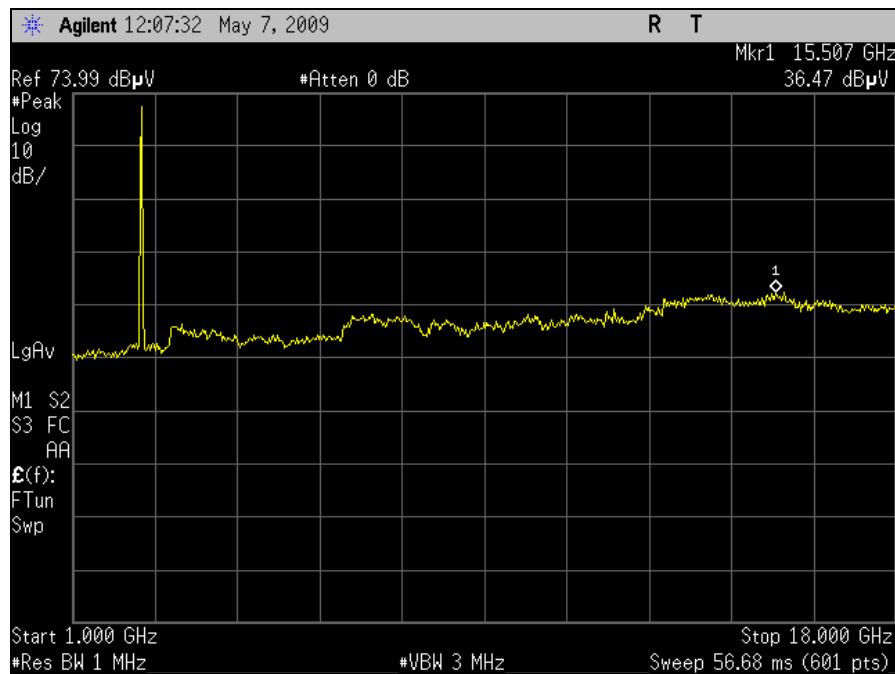

Plot 97. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11g 6dBi Omni Antenna

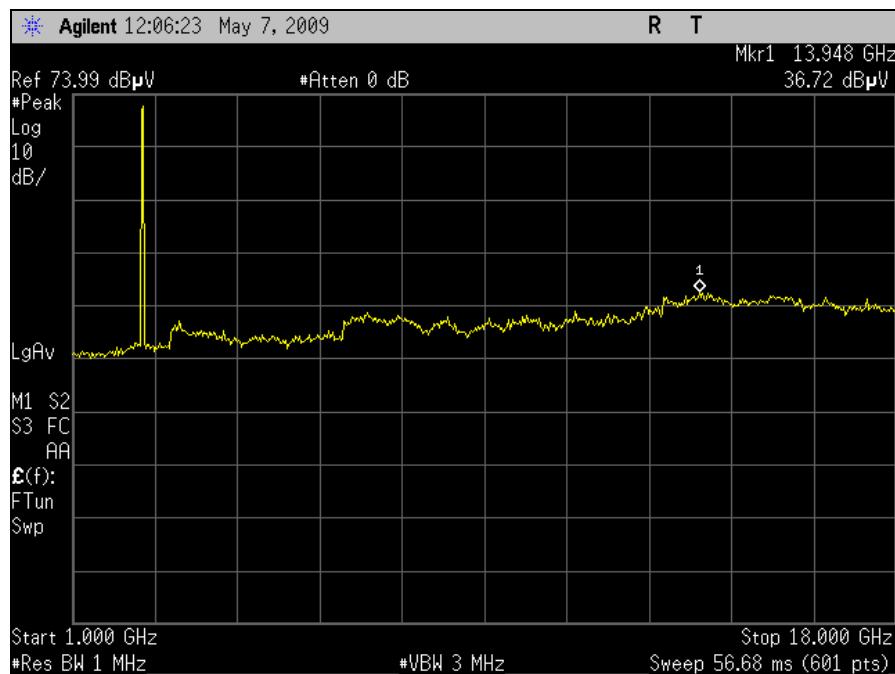


Plot 98. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11g 6dBi Omni Antenna

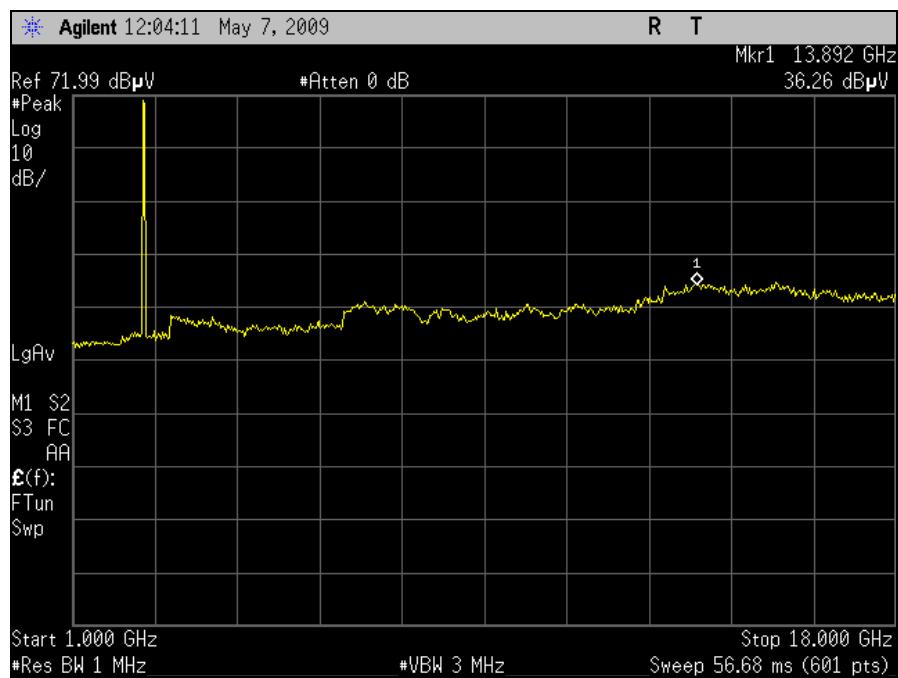


Plot 99. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11g 6dBi Omni Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (6dBi Omni Antenna)

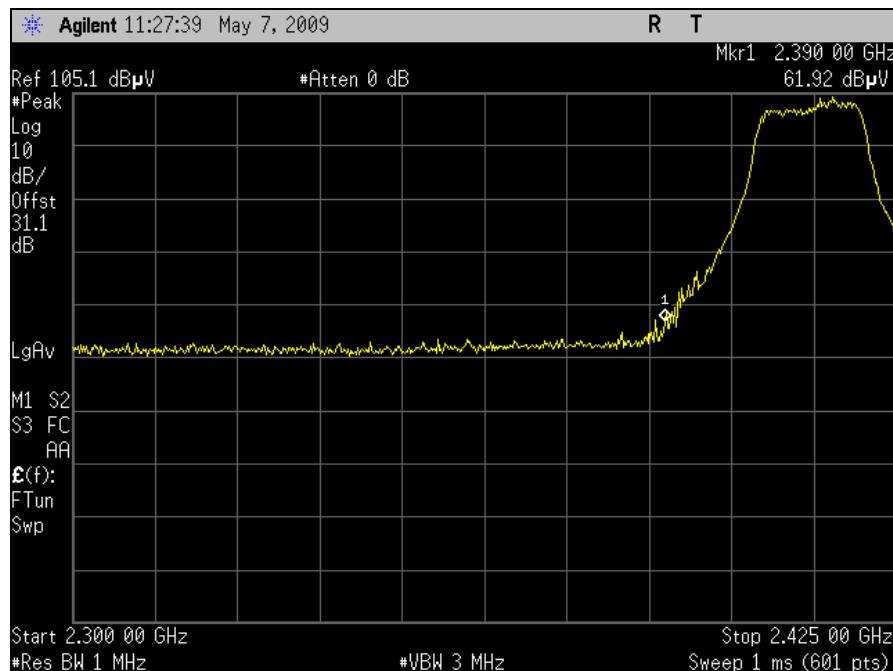


Plot 100. Radiated Restricted Band Edge, Low Channel Peak– 802.11g 6dBi Omni Antenna

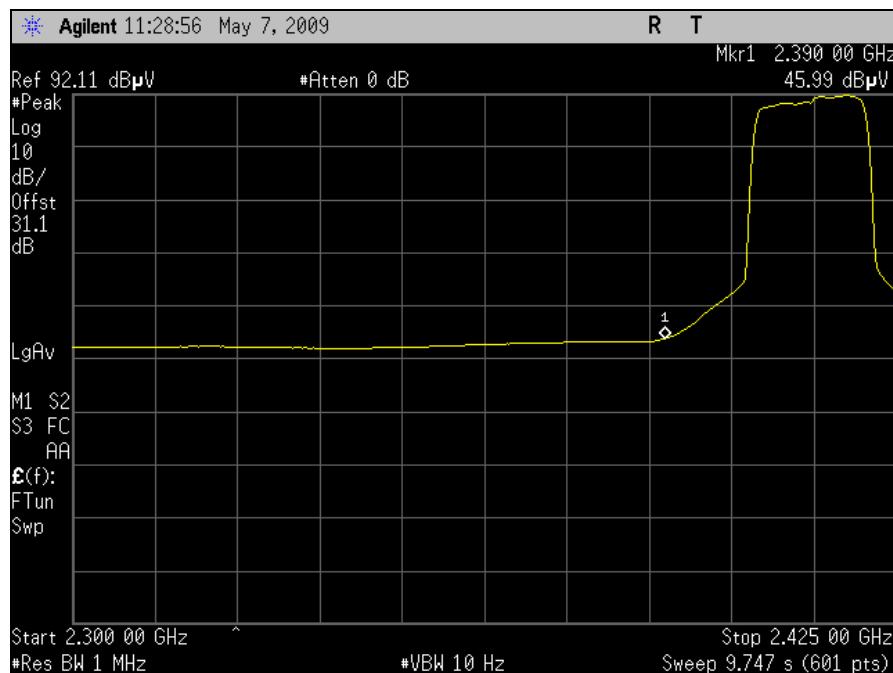


Plot 101. Radiated Restricted Band Edge, Low Channel Avg– 802.11g 6dBi Omni Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (6dBi Omni Antenna)

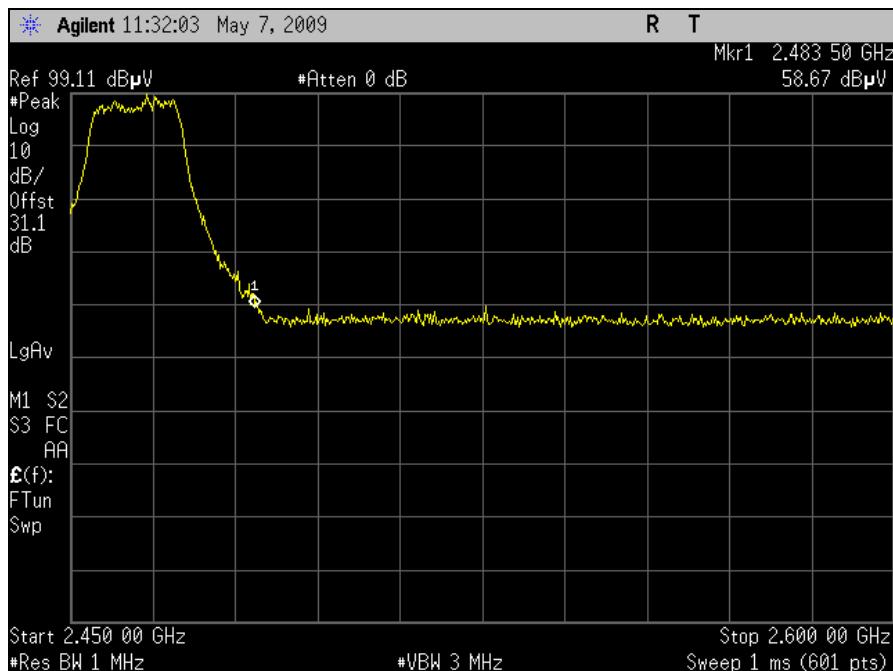

Plot 102. Radiated Restricted Band Edge, High Channel Peak– 802.11g 6dBi Omni Antenna

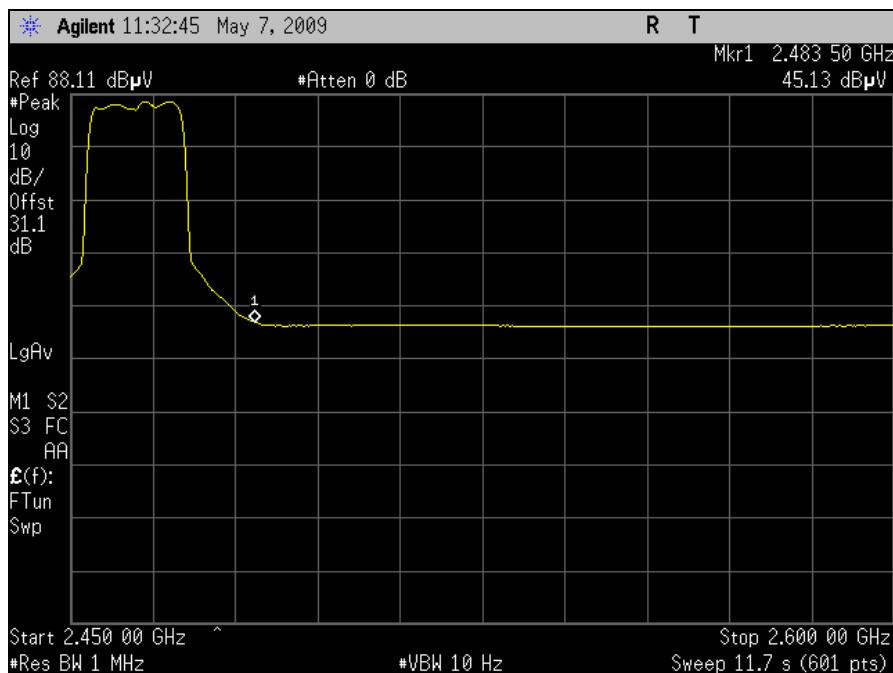

Plot 103. Radiated Restricted Band Edge, High Channel Avg– 802.11g 6dBi Omni Antenna

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g) 16dBi Sector Antenna

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.824	V	59.12	34.76	33.35	4.58	62.29	Peak	74	-11.71
4.824	V	41.6	34.76	33.35	4.58	44.77	Avg	54	-9.23
7.236	V	45.26	35.01	35.73	5.90	51.89	Peak	74	-22.11
7.236	V	32.36	35.01	35.73	5.90	38.99	Avg	54	-15.01
9.648	V	46.55	35.58	37.83	7.22	56.03	Peak	74	-17.97
9.648	V	32.45	35.58	37.83	7.22	41.93	Avg	54	-12.07
12.06	V	45.58	35.00	39.82	6.67	57.07	Peak	74	-16.93
12.06	V	32.01	35.00	39.82	6.67	43.50	Avg	54	-10.50
Low Channel 2412 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.874	V	59.2	34.74	33.50	4.63	62.59	Peak	74	-11.41
4.874	V	43.01	34.74	33.50	4.63	46.40	Avg	54	-7.60
7.311	V	45.48	35.02	35.95	6.31	52.71	Peak	74	-21.29
7.311	V	32.14	35.02	35.95	6.31	39.37	Avg	54	-14.63
9.748	V	46.14	35.55	37.95	7.16	55.70	Peak	74	-18.30
9.748	V	32.54	35.55	37.95	7.16	42.10	Avg	54	-11.90
12.185	V	45.77	34.94	39.53	7.11	57.47	Peak	74	-16.53
12.185	V	31.98	34.94	39.53	7.11	43.68	Avg	54	-10.32
Mid Channel 2437 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.924	V	52.86	34.73	33.64	4.68	56.44	Peak	74	-17.56
4.924	V	35.98	34.73	33.64	4.68	39.56	Avg	54	-14.44
7.386	V	46.13	35.05	36.15	6.66	53.89	Peak	74	-20.11
7.386	V	32.11	35.05	36.15	6.66	39.87	Avg	54	-14.13
9.848	V	45.32	35.54	38.07	7.08	54.92	Peak	74	-19.08
9.848	V	33.09	35.54	38.07	7.08	42.69	Avg	54	-11.31
12.31	V	46.26	34.83	39.19	7.72	58.34	Peak	74	-15.66
12.31	V	31.33	34.83	39.19	7.72	43.41	Avg	54	-10.59
High Channel 2462 MHz									


Table 46. Radiated Harmonic Emissions Test Results, 802.11g Mode (16dBi Sector Antenna)

Note: All other emissions were measured at the noise floor of the spectrum analyzer


§ 15.247(d) Radiated Spurious Emissions – 802.11g (16dBi Sector Antenna)

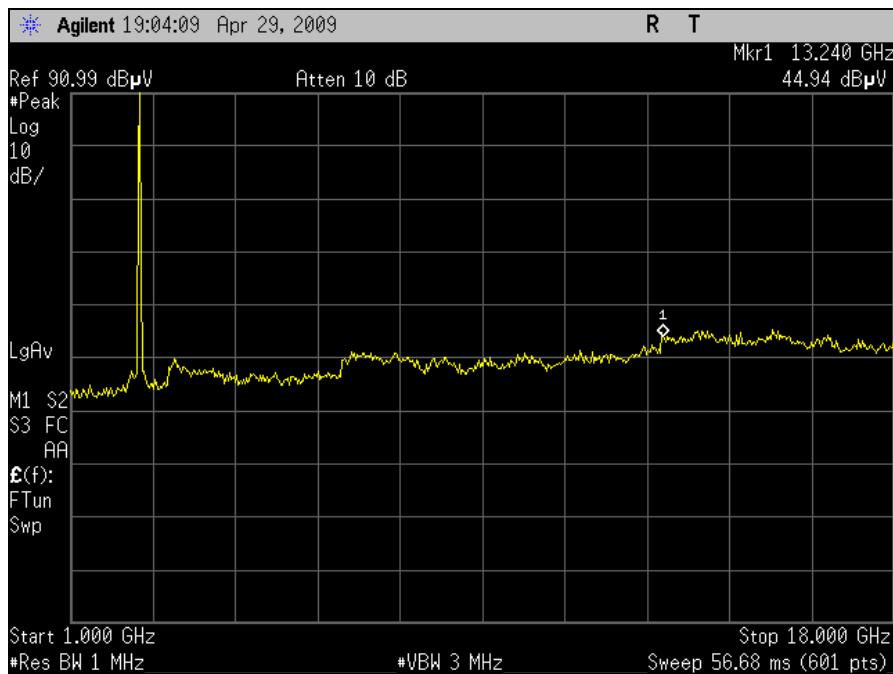

Plot 104. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11g 16dBi Sector Antenna

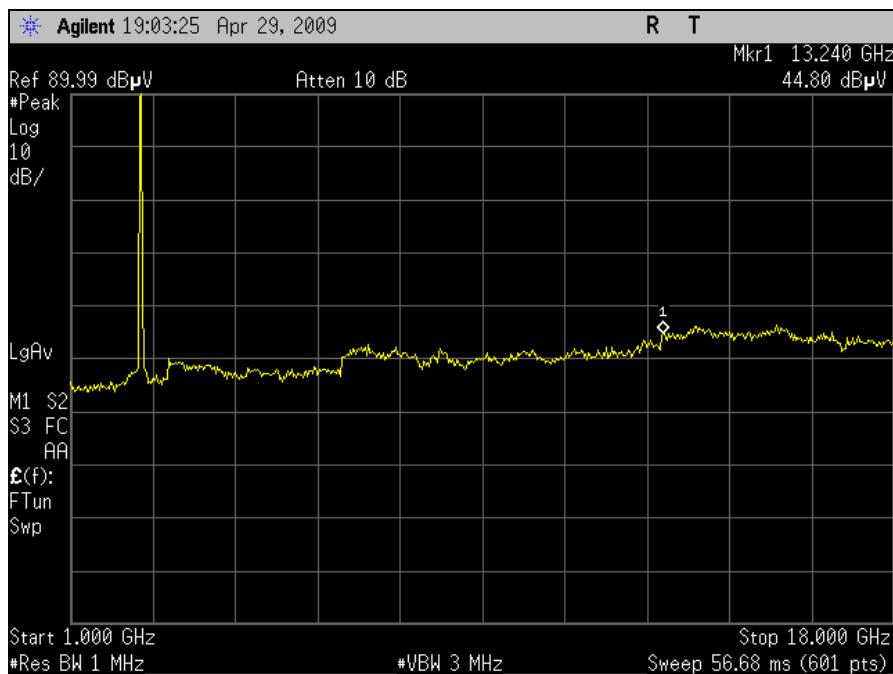


Plot 105. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11g 16dBi Sector Antenna

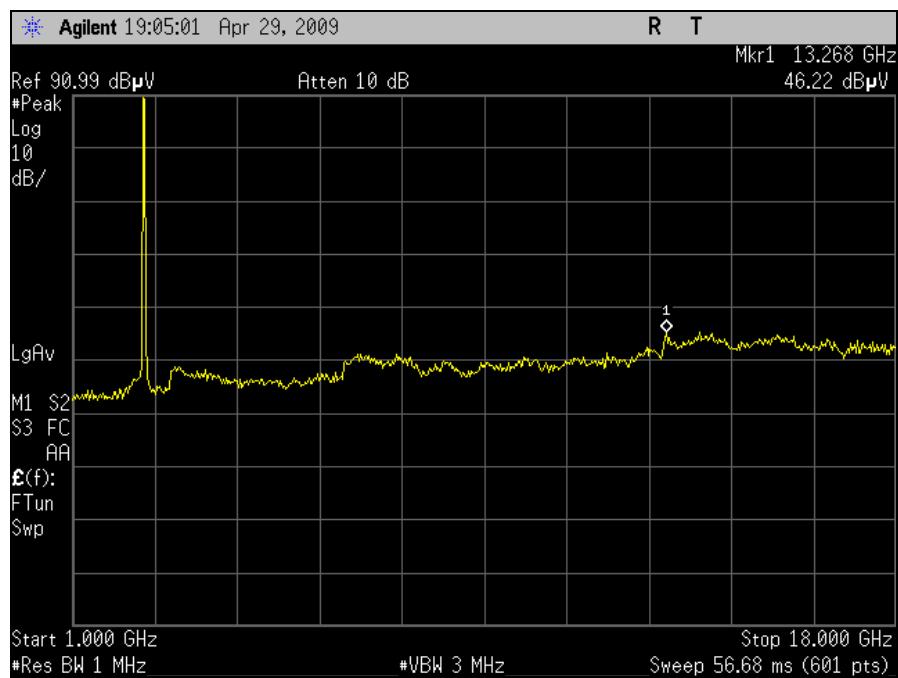


Plot 106. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11g 16dBi Sector Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (16dBi Sector Antenna)

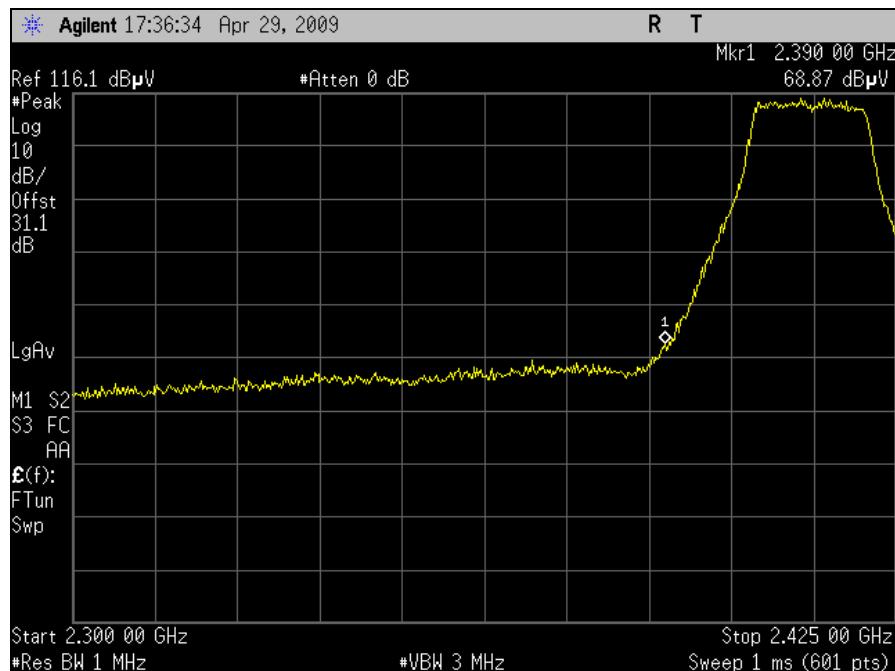


Plot 107. Radiated Restricted Band Edge, Low Channel Peak– 802.11g 16dBi Sector Antenna

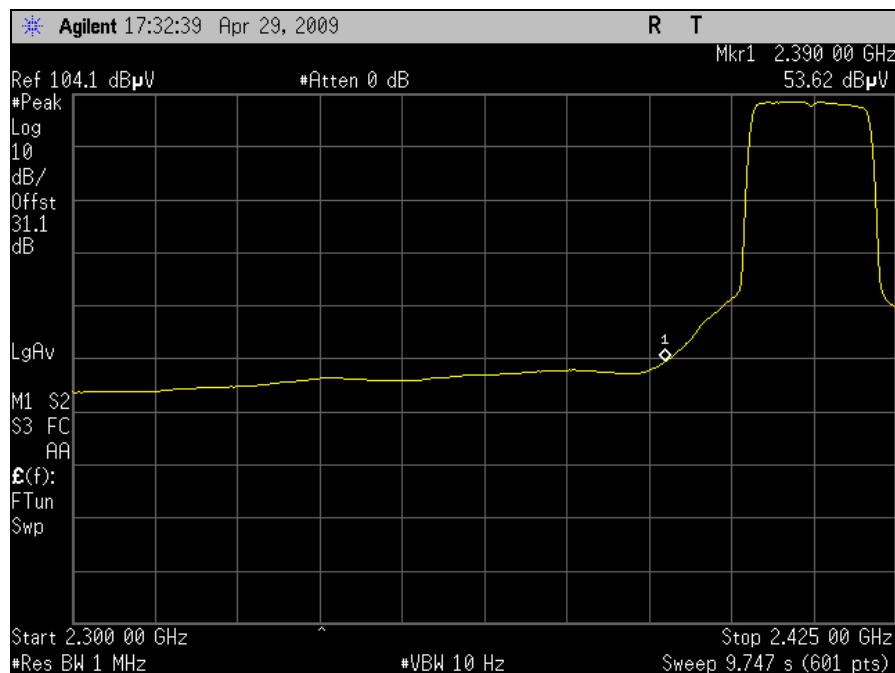


Plot 108. Radiated Restricted Band Edge, Low Channel Avg– 802.11g 16dBi Sector Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (16dBi Sector Antenna)

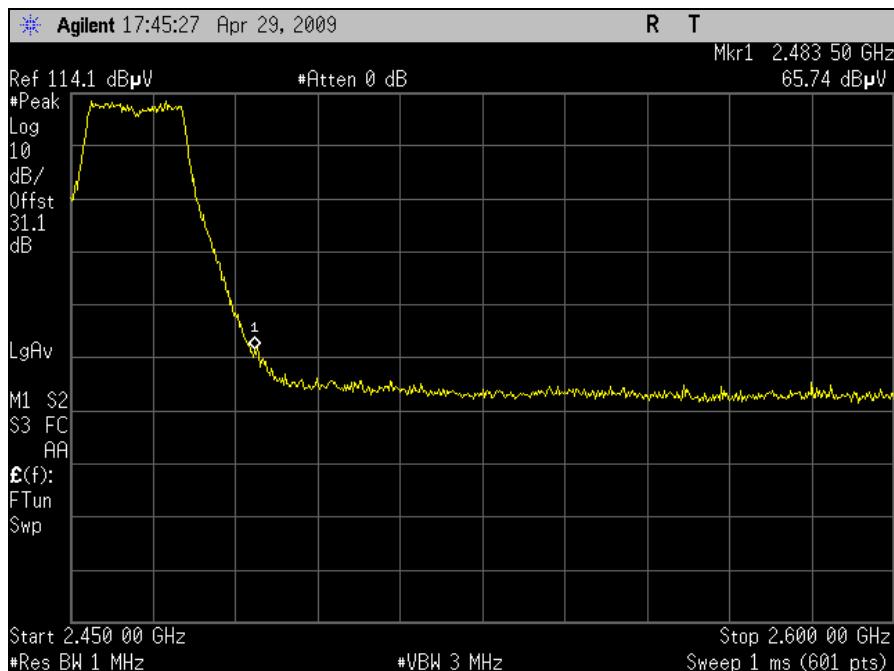


Plot 109. Radiated Restricted Band Edge, High Channel Peak– 802.11g 16dBi Sector Antenna

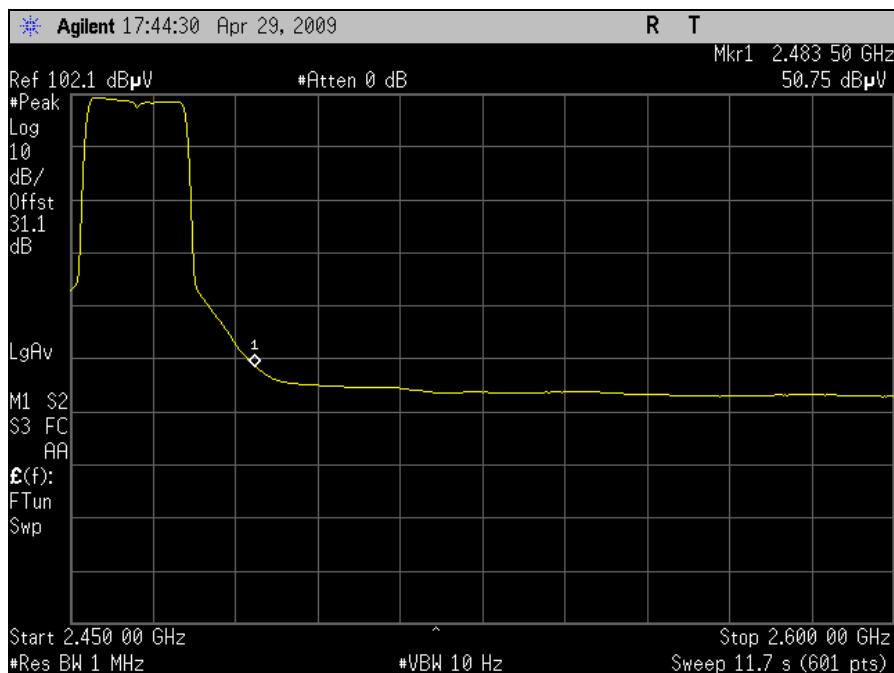


Plot 110. Radiated Restricted Band Edge, High Channel Avg– 802.11g 16dBi Sector Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (16dBi Sector Antenna)

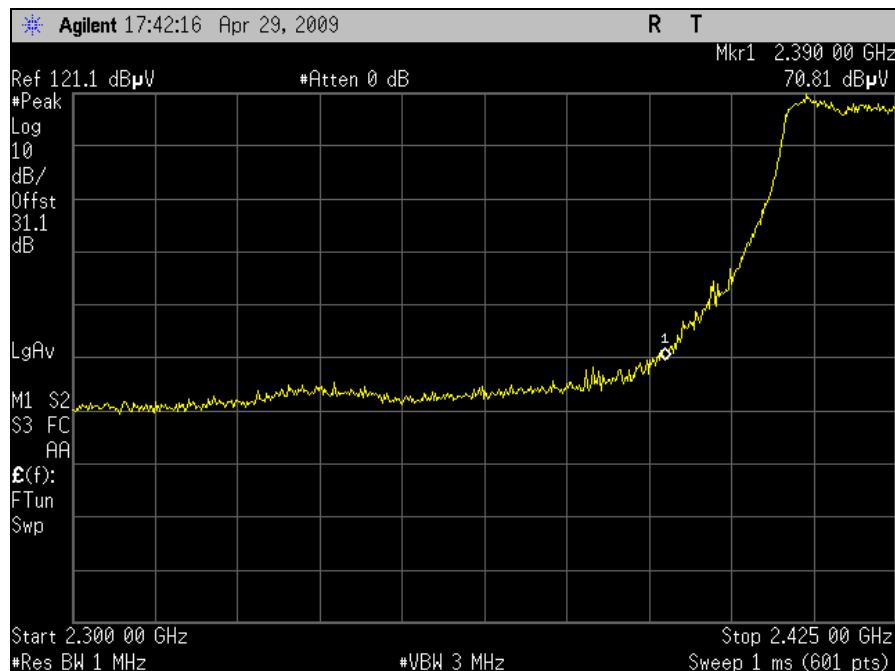


Plot 111. Radiated Restricted Band Edge, Channel 2, (2417MHz) Peak– 802.11g 16dBi Sector Antenna

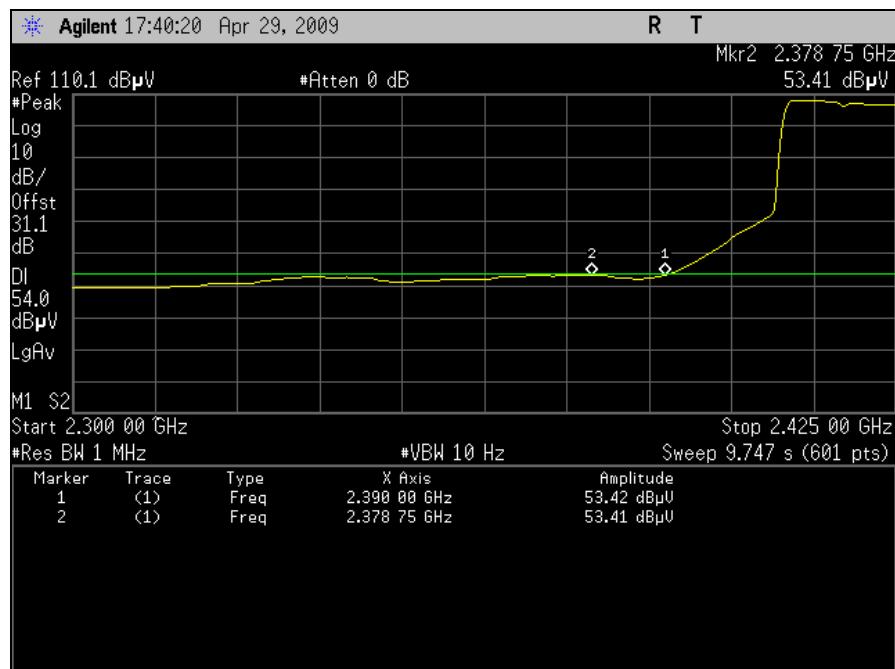


Plot 112. Radiated Restricted Band Edge, Channel 2 (2417MHz) Avg– 802.11g 16dBi Sector Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (16dBi Sector Antenna)

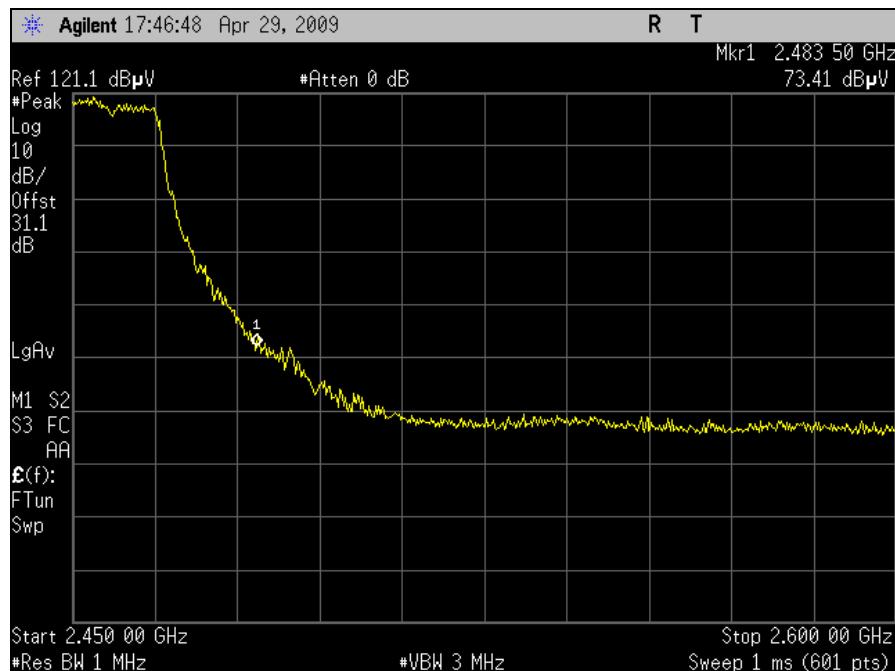

Plot 113. Radiated Restricted Band Edge, Channel 10 (2457MHz) Peak– 802.11g 16dBi Sector Antenna

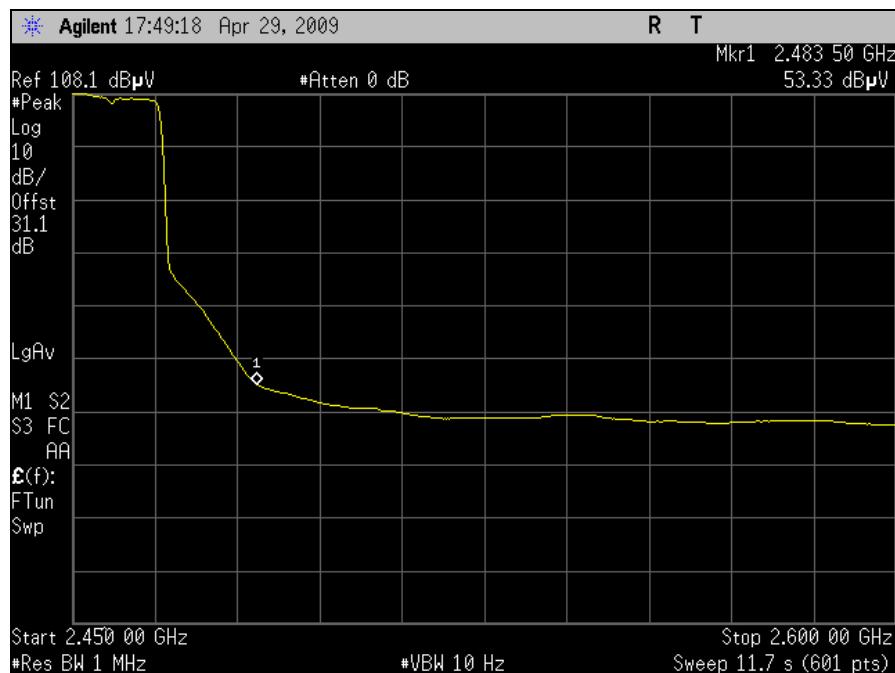

Plot 114. Radiated Restricted Band Edge, Channel 10 (2457MHz) Avg– 802.11g 16dBi Sector Antenna

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g) 18dBi Panel Antenna

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.824	V	51.3	34.76	33.35	4.58	54.47	Peak	74	-19.53
4.824	V	36.41	34.76	33.35	4.58	39.58	Avg	54	-14.42
7.236	V	45.9	35.01	35.73	5.90	52.53	Peak	74	-21.47
7.236	V	32.45	35.01	35.73	5.90	39.08	Avg	54	-14.92
9.648	V	45.99	35.58	37.83	7.22	55.47	Peak	74	-18.53
9.648	V	31.92	35.58	37.83	7.22	41.40	Avg	54	-12.60
12.06	V	45.21	35.00	39.82	6.67	56.70	Peak	74	-17.30
12.06	V	30.78	35.00	39.82	6.67	42.27	Avg	54	-11.73
Low Channel 2412 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.874	V	49.06	34.74	33.50	4.63	52.45	Peak	74	-21.55
4.874	V	34.38	34.74	33.50	4.63	37.77	Avg	54	-16.23
7.311	V	45.38	35.02	35.95	6.31	52.61	Peak	74	-21.39
7.311	V	32.22	35.02	35.95	6.31	39.45	Avg	54	-14.55
9.748	V	47.31	35.55	37.95	7.16	56.87	Peak	74	-17.13
9.748	V	32.76	35.55	37.95	7.16	42.32	Avg	54	-11.68
12.185	V	46.12	34.94	39.53	7.11	57.82	Peak	74	-16.18
12.185	V	32.26	34.94	39.53	7.11	43.96	Avg	54	-10.04
Mid Channel 2437 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.924	V	47.65	34.73	33.64	4.68	51.23	Peak	74	-22.77
4.924	V	32.85	34.73	33.64	4.68	36.43	Avg	54	-17.57
7.386	V	46.26	35.05	36.15	6.66	54.02	Peak	74	-19.98
7.386	V	32.23	35.05	36.15	6.66	39.99	Avg	54	-14.01
9.848	V	46.21	35.54	38.07	7.08	55.81	Peak	74	-18.19
9.848	V	31.03	35.54	38.07	7.08	40.63	Avg	54	-13.37
12.31	V	45.93	34.83	39.19	7.72	58.01	Peak	74	-15.99
12.31	V	32.11	34.83	39.19	7.72	44.19	Avg	54	-9.81
High Channel 2462 MHz									


Table 47. Radiated Harmonic Emissions Test Results, 802.11g Mode (18dBi Panel Antenna)

Note: All other emissions were measured at the noise floor of the spectrum analyzer


§ 15.247(d) Radiated Spurious Emissions – 802.11g (18dBi Panel Antenna)

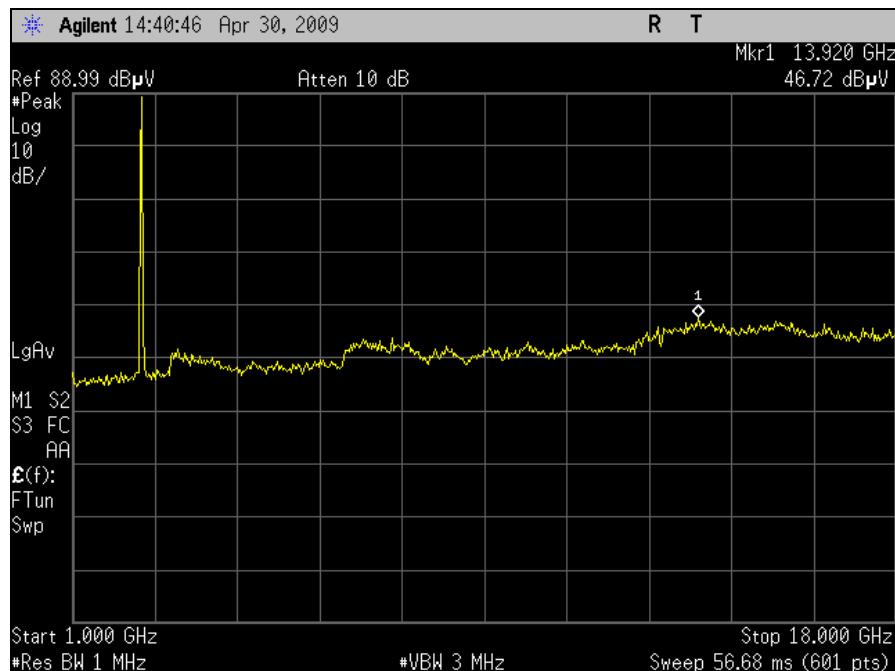

Plot 115. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11g 18dBi Panel Antenna

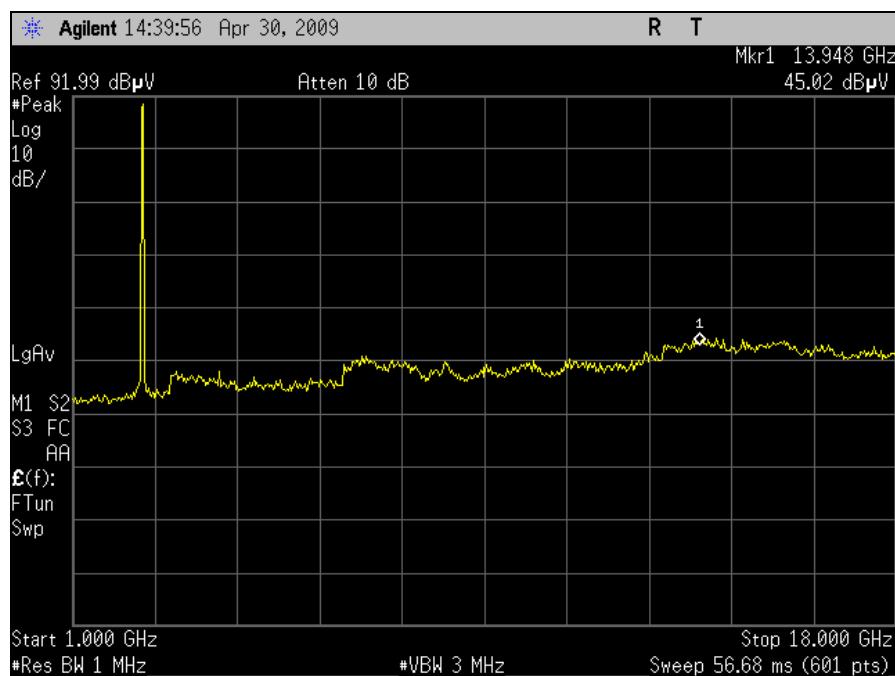


Plot 116. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11g 18dBi Panel Antenna

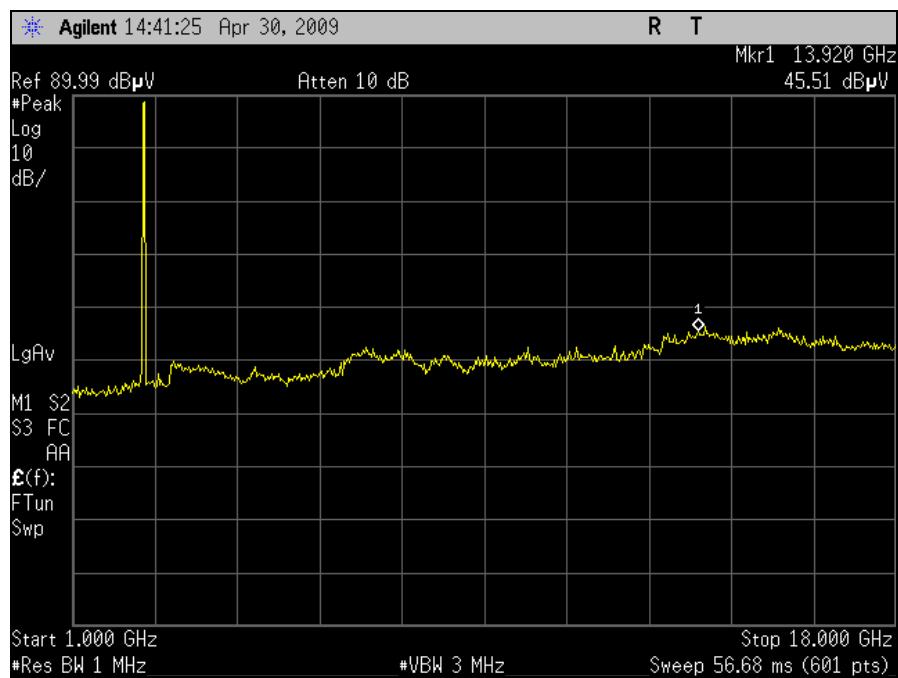

Plot 117. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11g 18dBi Panel Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (18dBi Panel Antenna)

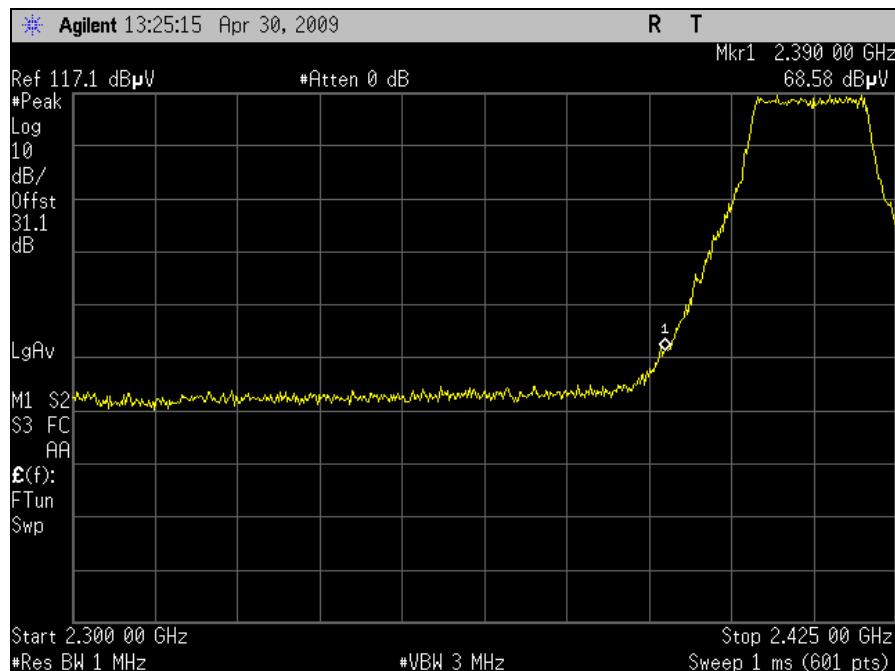


Plot 118. Radiated Restricted Band Edge, Channel 1 Peak– 802.11g 18dBi Panel Antenna (Lower Power)




Plot 119. Radiated Restricted Band Edge, Channel 1 Avg.– 802.11g 18dBi Panel Antenna (Lower Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (18dBi Panel Antenna)

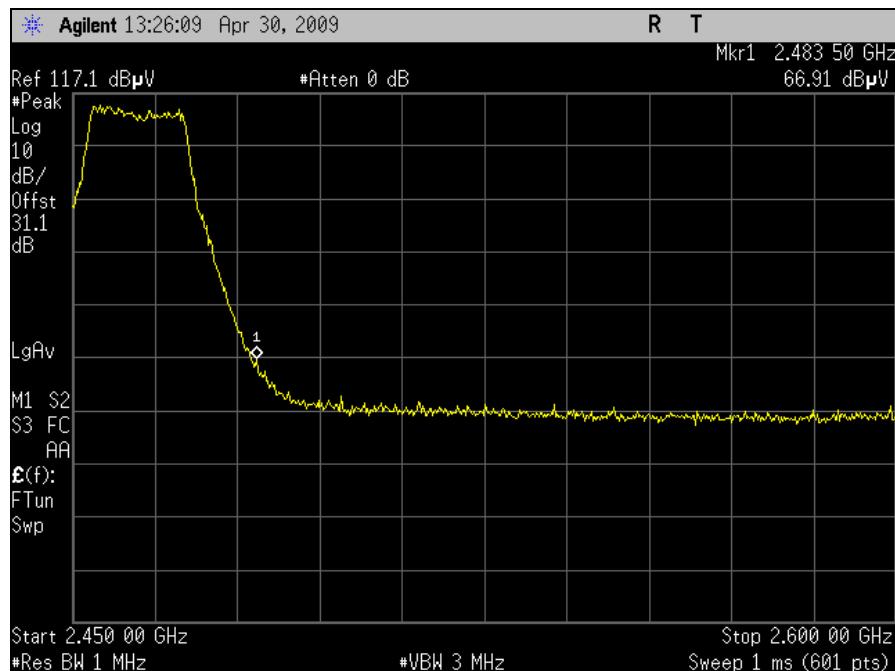


Plot 120. Radiated Restricted Band Edge, Channel 12 Peak– 802.11g 18dBi Panel Antenna (Lower Power)

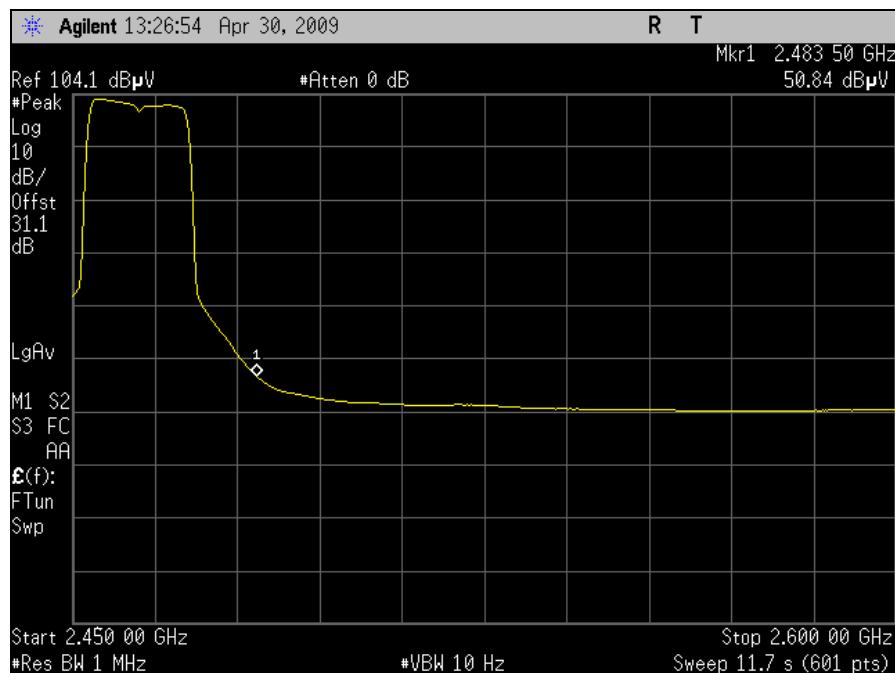


Plot 121. Radiated Restricted Band Edge, Channel 12 Avg.– 802.11g 18dBi Panel Antenna (Lower Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (18dBi Panel Antenna)

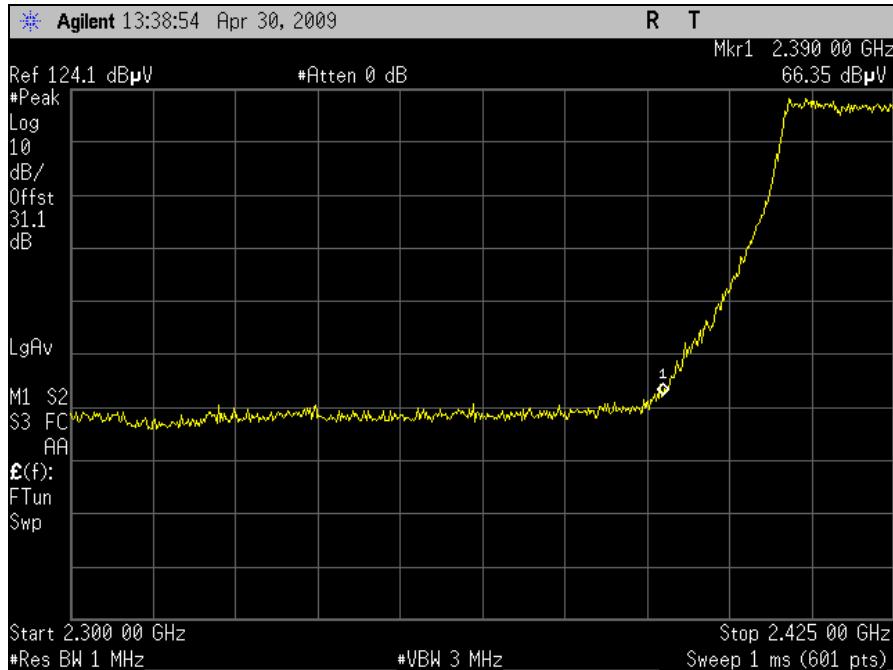


Plot 122. Radiated Restricted Band Edge, Channel 2 Peak—802.11g 18dBi Panel Antenna (Higher Power)

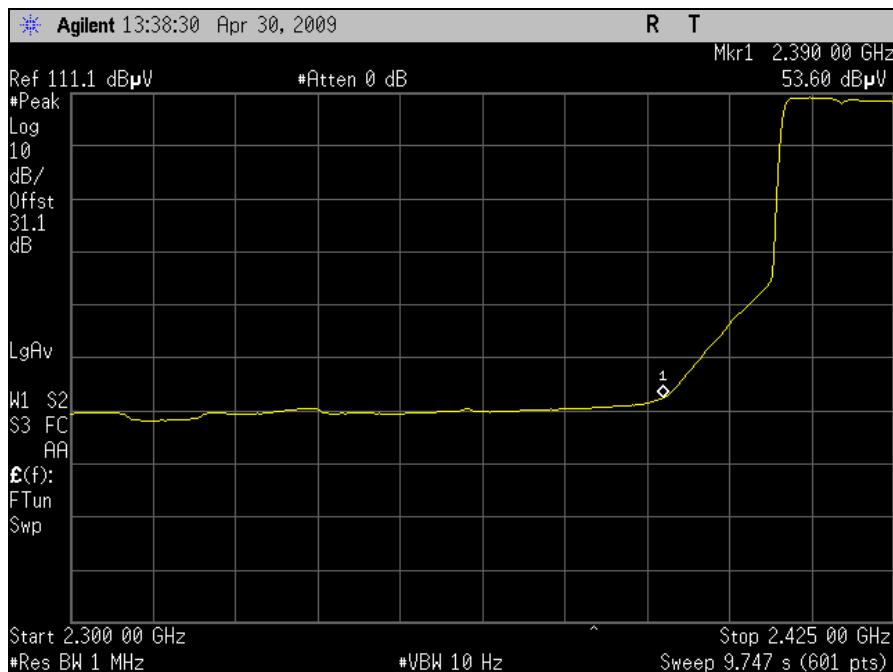


Plot 123. Radiated Restricted Band Edge, Channel 2 Avg.—802.11g 18dBi Panel Antenna (Higher Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (18dBi Panel Antenna)

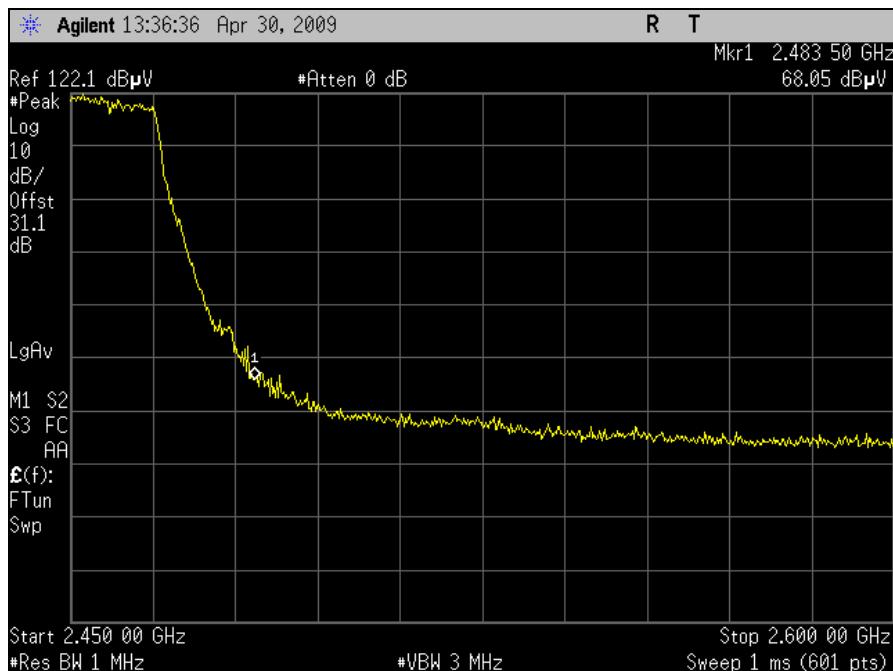


Plot 124. Radiated Restricted Band Edge, Channel 11 Peak– 802.11g 18dBi Panel Antenna (Higher Power)

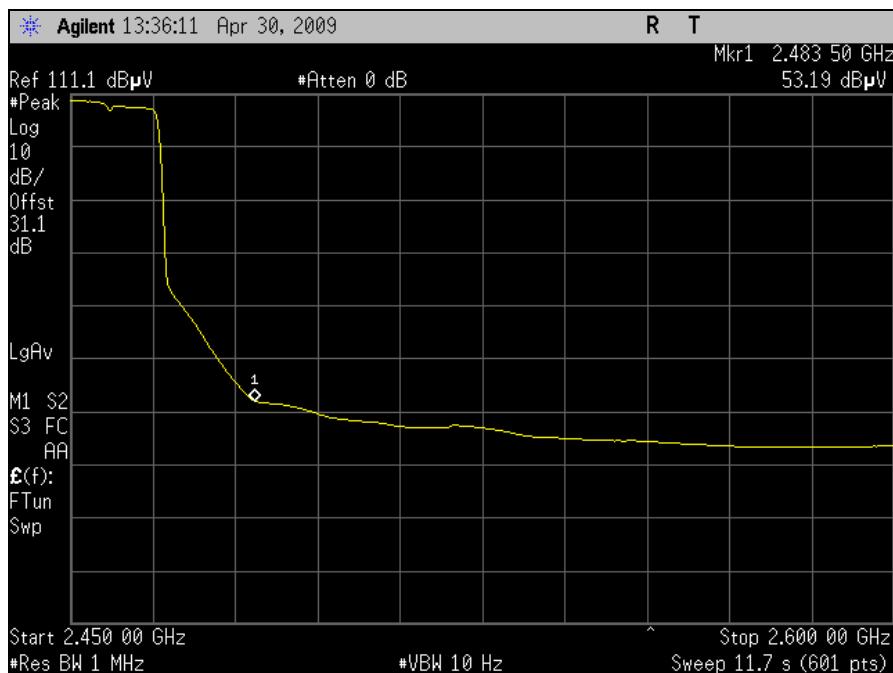


Plot 125. Radiated Restricted Band Edge, Channel 11 Avg.– 802.11g 18dBi Panel Antenna (Higher Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (18dBi Panel Antenna)

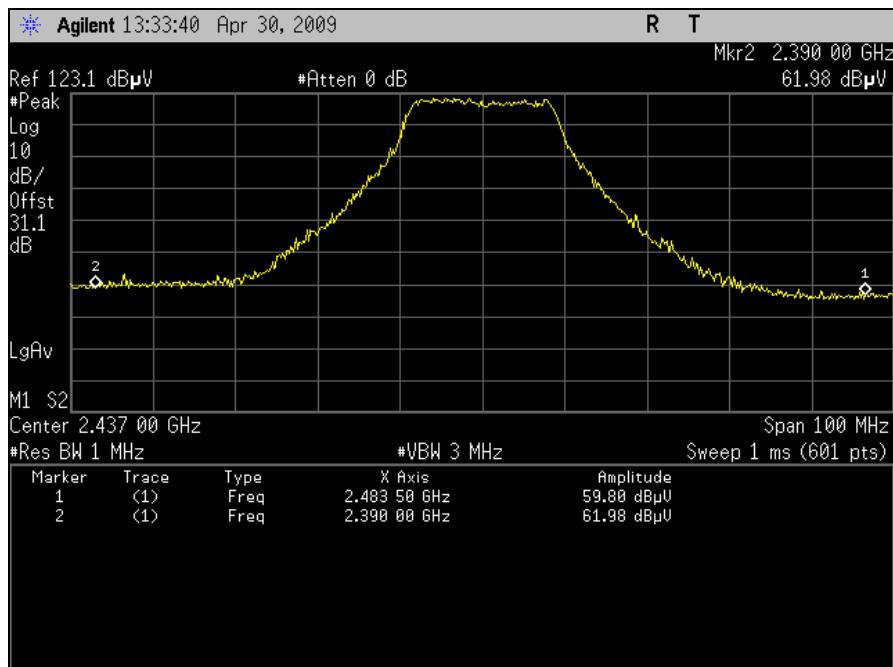

Plot 126. Radiated Restricted Band Edge, Mid Channel Peak– 802.11g 18dBi Panel Antenna

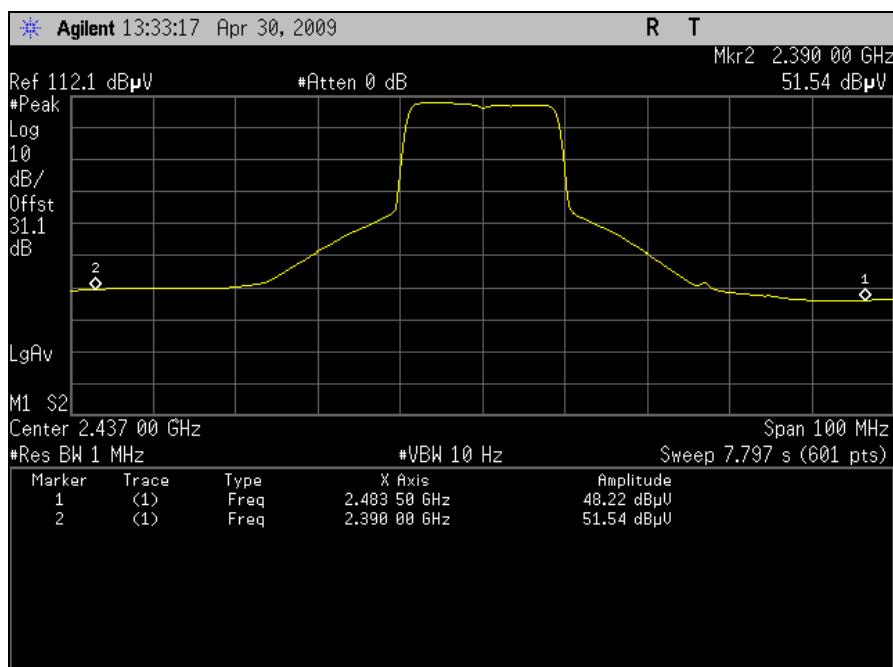

Plot 127. Radiated Restricted Band Edge, Mid Channel Avg– 802.11g 18dBi Panel Antenna

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g) 25dBi Grid Antenna

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.824	V	44.41	34.76	33.35	4.58	47.58	Peak	74	-26.42
4.824	V	30.82	34.76	33.35	4.58	33.99	Avg	54	-20.01
7.236	V	32.35	35.01	35.73	5.90	38.98	Peak	74	-35.02
7.236	V	46.21	35.01	35.73	5.90	52.84	Avg	54	-1.16
9.648	V	32.49	35.58	37.83	7.22	41.97	Peak	74	-32.03
9.648	V	46.21	35.58	37.83	7.22	55.69	Avg	54	1.69
12.06	V	45.57	35.00	39.82	6.67	57.06	Peak	74	-16.94
12.06	V	32.09	35.00	39.82	6.67	43.58	Avg	54	-10.42
Low Channel 2412 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.874	V	45.08	34.74	33.50	4.63	48.47	Peak	74	-25.53
4.874	V	33.92	34.74	33.50	4.63	37.31	Avg	54	-16.69
7.311	V	46.21	35.02	35.95	6.31	53.44	Peak	74	-20.56
7.311	V	32.93	35.02	35.95	6.31	40.16	Avg	54	-13.84
9.748	V	45.22	35.55	37.95	7.16	54.78	Peak	74	-19.22
9.748	V	31.83	35.55	37.95	7.16	41.39	Avg	54	-12.61
12.185	V	45.91	34.94	39.53	7.11	57.61	Peak	74	-16.39
12.185	V	32.73	34.94	39.53	7.11	44.43	Avg	54	-9.57
Mid Channel 2437 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.924	V	45.2	34.73	33.64	4.68	48.78	Peak	74	-25.22
4.924	V	30.86	34.73	33.64	4.68	34.44	Avg	54	-19.56
7.386	V	45.95	35.05	36.15	6.66	53.71	Peak	74	-20.29
7.386	V	32.2	35.05	36.15	6.66	39.96	Avg	54	-14.04
9.848	V	47.06	35.54	38.07	7.08	56.66	Peak	74	-17.34
9.848	V	32.84	35.54	38.07	7.08	42.44	Avg	54	-11.56
12.31	V	46.31	34.83	39.19	7.72	58.39	Peak	74	-15.61
12.31	V	31.02	34.83	39.19	7.72	43.10	Avg	54	-10.90
High Channel 2462 MHz									


Table 48. Radiated Harmonic Emissions Test Results, 802.11g Mode (25dBi Grid Antenna)

Note: All other emissions were measured at the noise floor of the spectrum analyzer


§ 15.247(d) Radiated Spurious Emissions –802.11g (25dBi Grid Antenna)

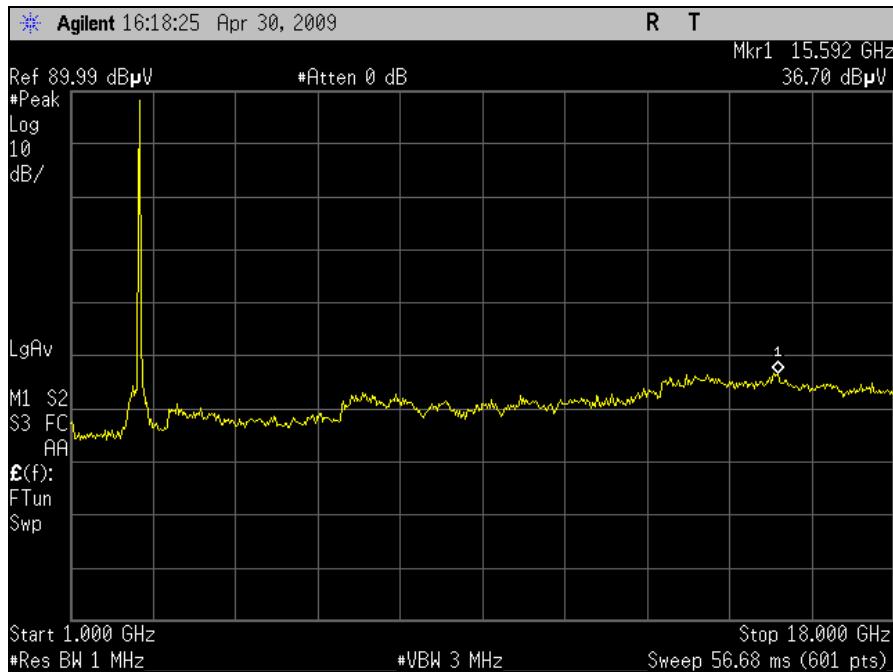

Plot 128. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11g 25dBi Grid Antenna

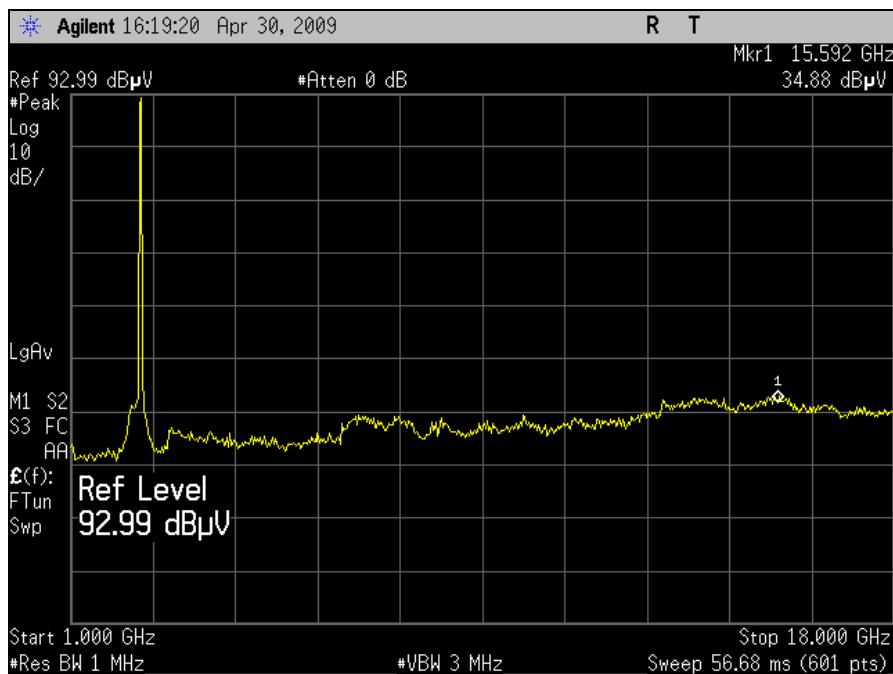


Plot 129. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11g 25dBi Grid Antenna

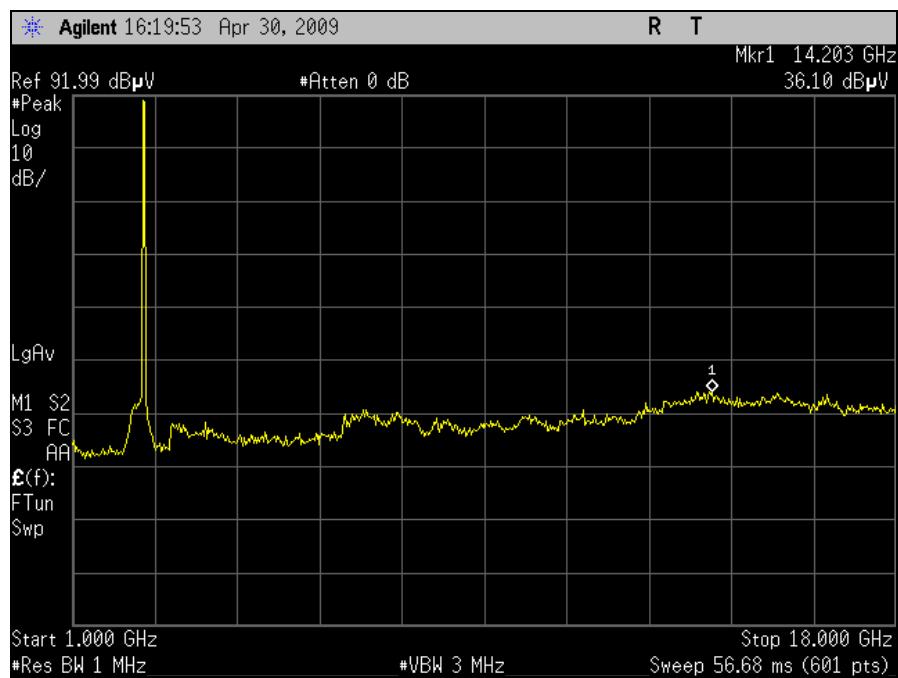


Plot 130. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11g 25dBi Grid Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (25dBi Grid Antenna)

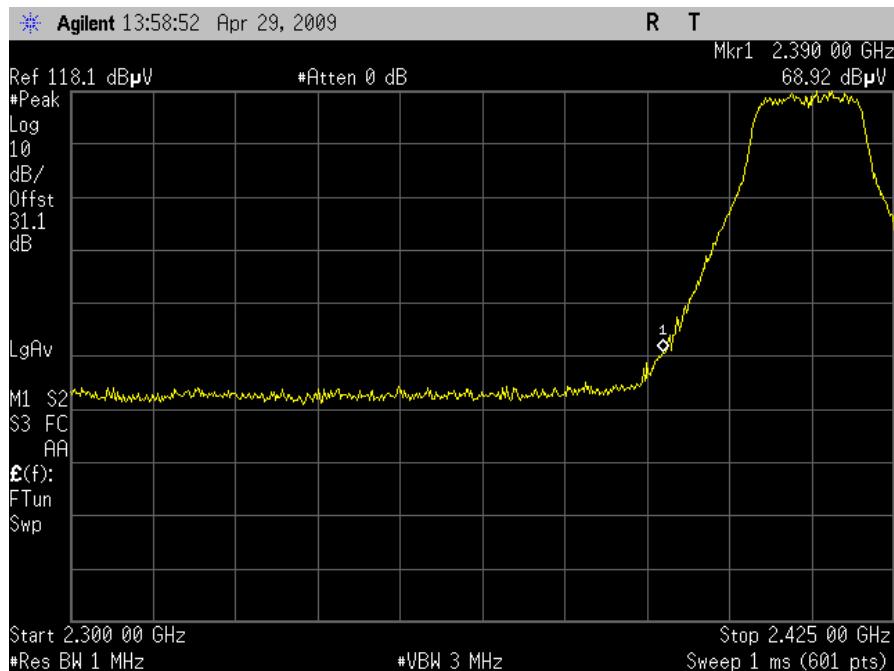


Plot 131. Radiated Restricted Band Edge, Channel 1 Peak– 802.11g 25dBi Grid Antenna (Lower Power)

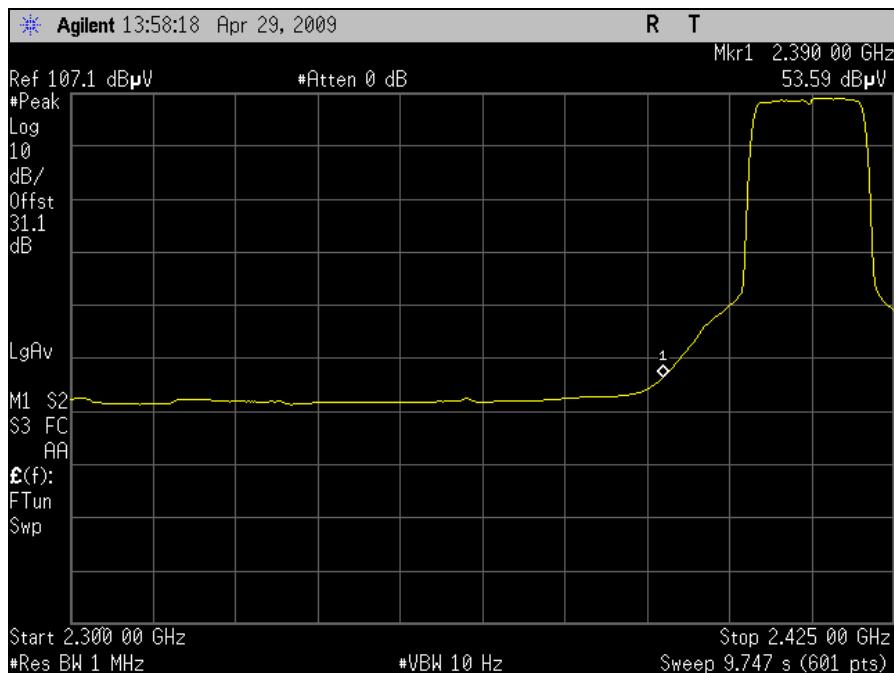


Plot 132. Radiated Restricted Band Edge, Channel 1 Avg.– 802.11g 25dBi Grid Antenna (Lower Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (25dBi Grid Antenna)

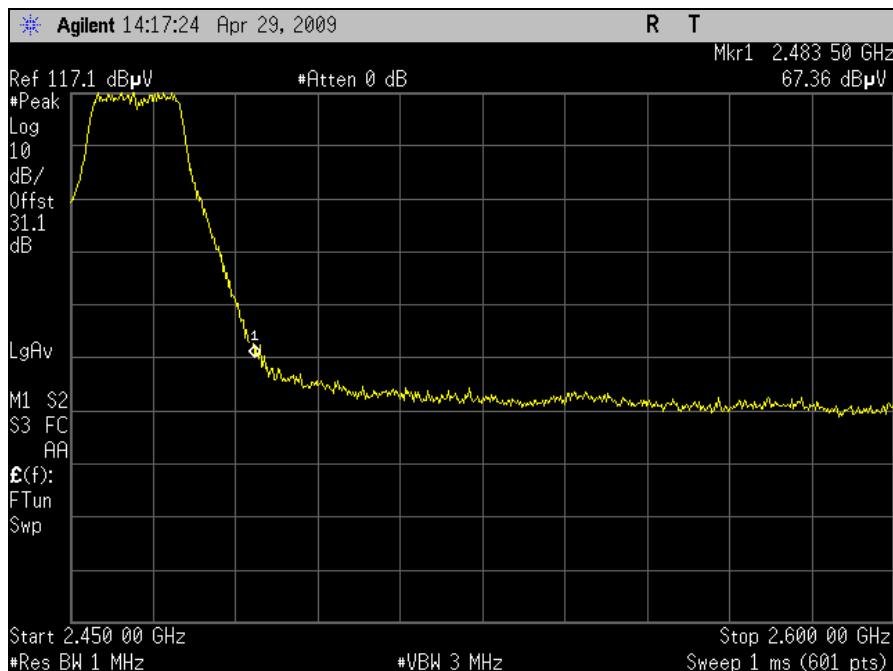


Plot 133. Radiated Restricted Band Edge, Channel 12 Peak– 802.11g 25dBi Grid Antenna (Lower Power)

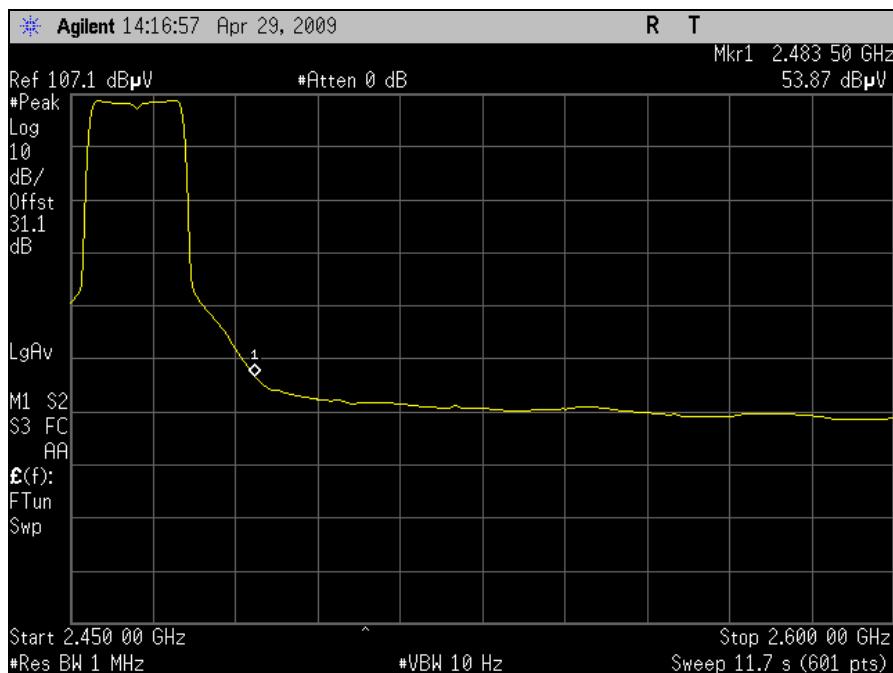


Plot 134. Radiated Restricted Band Edge, Channel 12 Avg.– 802.11g 25dBi Grid Antenna (Lower Power)

§ 15.247(d) Radiated Restricted Band Edge – 802.11g (25dBi Grid Antenna)

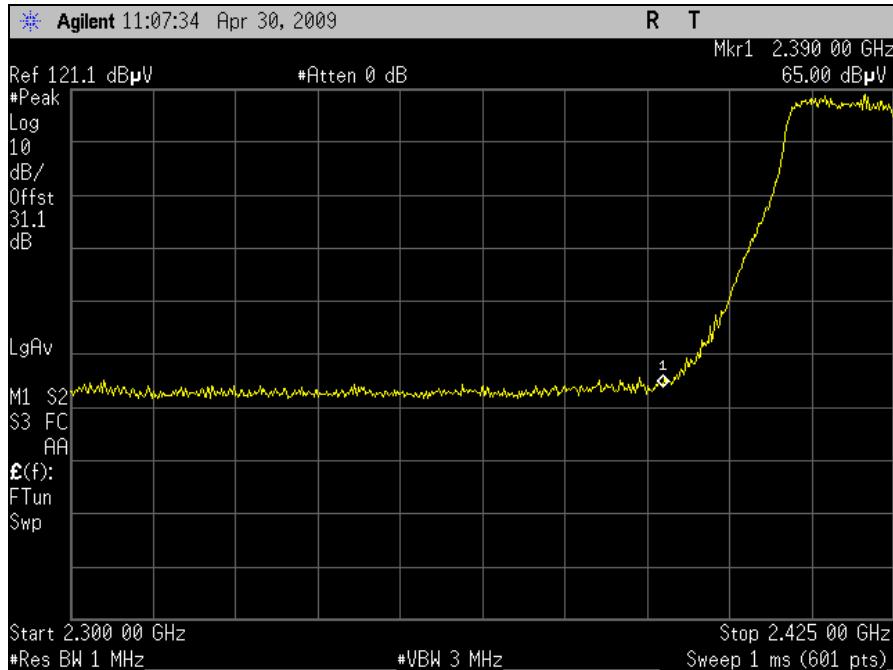


Plot 135. Radiated Restricted Band Edge, Channel 2 Peak– 802.11g 25dBi Grid Antenna (Higher Power)

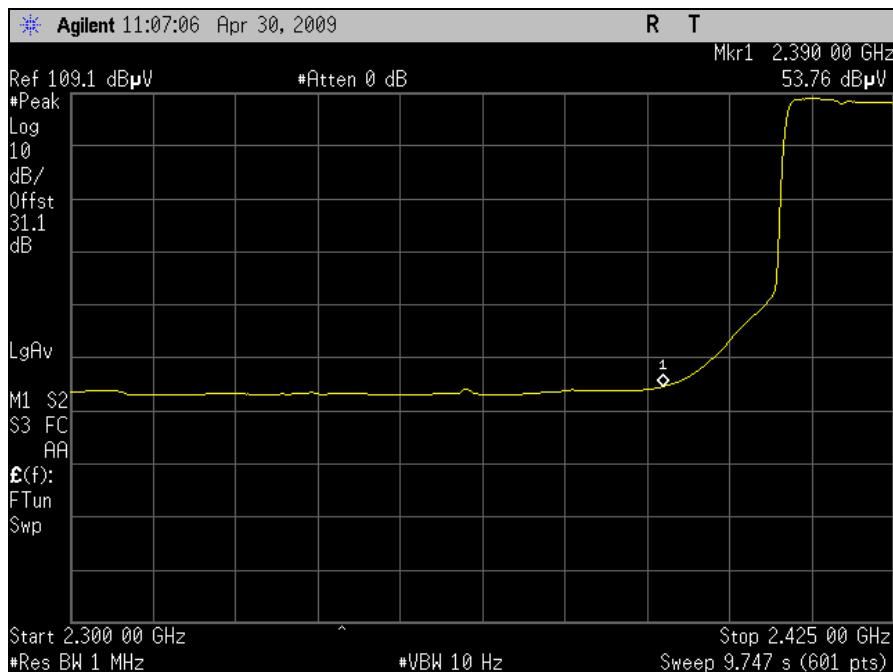


Plot 136. Radiated Restricted Band Edge, Channel 2 Avg.– 802.11g 25dBi Grid Antenna (Higher Power)



§ 15.247(d) Radiated Restricted Band Edge – 802.11g (25dBi Grid Antenna)

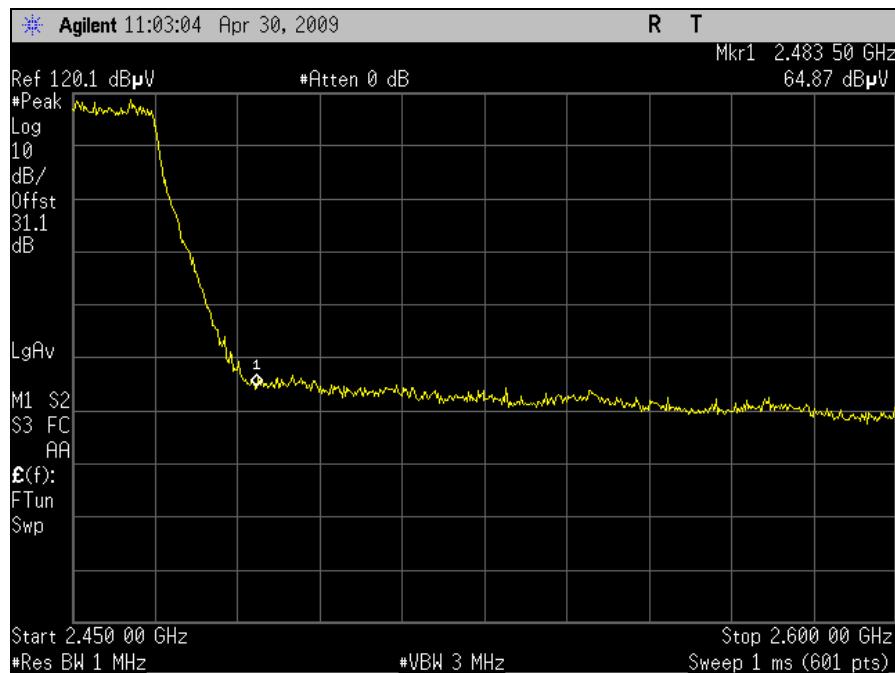

Plot 137. Radiated Restricted Band Edge, Channel 11 Peak– 802.11g 25dBi Grid Antenna (Higher Power)

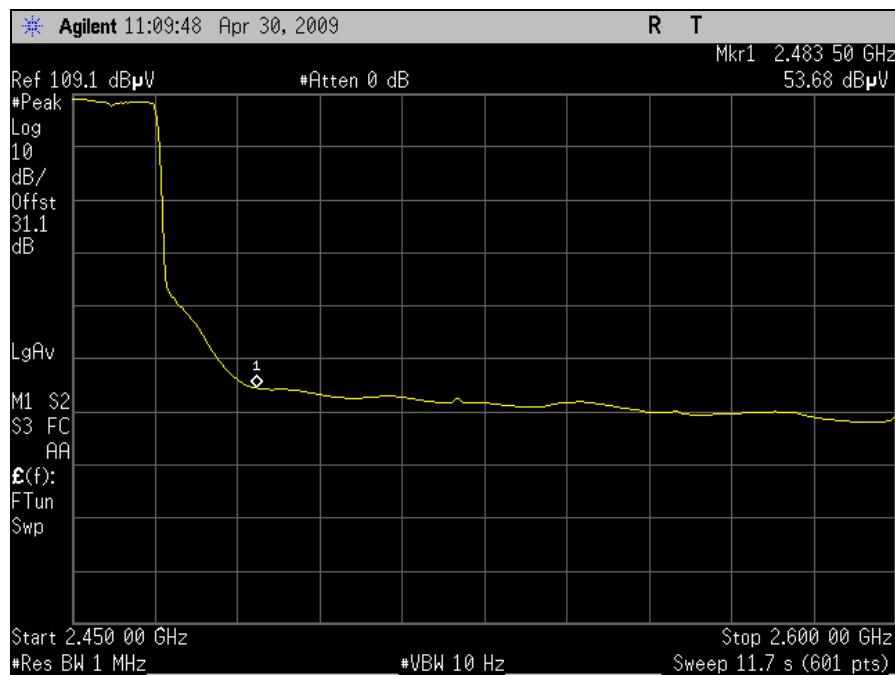

Plot 138. Radiated Restricted Band Edge, Channel 11 Avg.– 802.11g 25dBi Grid Antenna (Higher Power)

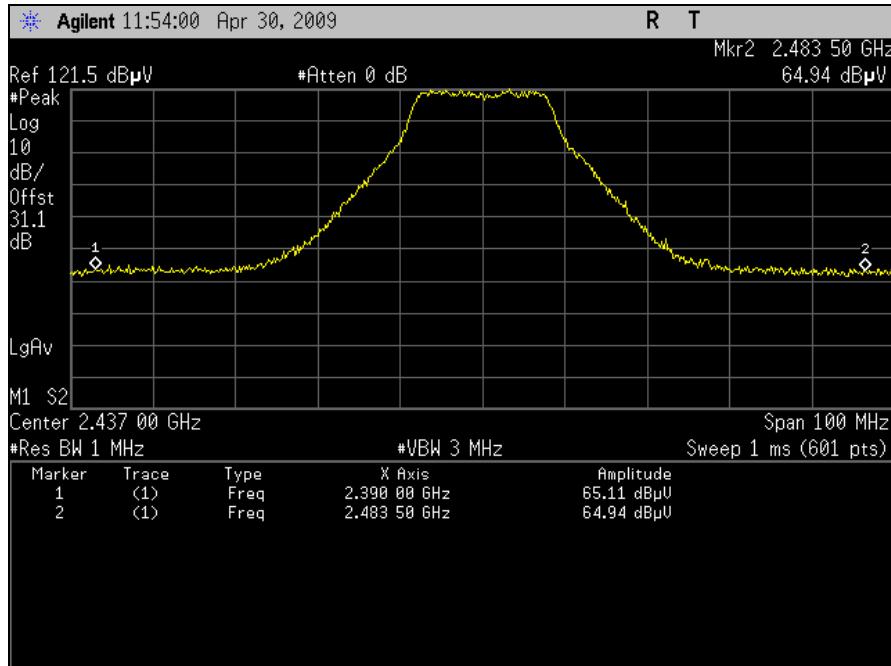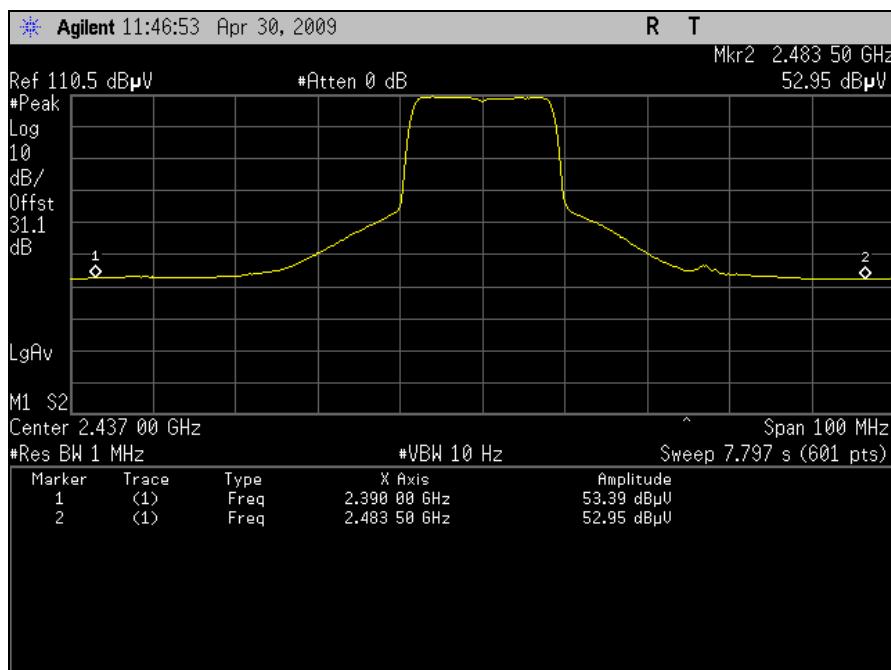§ 15.247(d) Radiated Restricted Band Edge – 802.11g (25dBi Grid Antenna)

Plot 139. Radiated Restricted Band Edge, Mid Channel Peak—802.11g 25dBi Grid Antenna

Plot 140. Radiated Restricted Band Edge, Mid Channel Avg—802.11g 25dBi Grid Antenna

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(d) Radiated Harmonic Emissions – 802.11n 20MHz All Ports (6dBi Omni Antenna)

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.824	V	54.04	34.76	33.35	4.58	57.21	Peak	74	-16.79
4.824	V	40.14	34.76	33.35	4.58	43.31	Avg	54	-10.69
7.236	V	45.87	35.01	35.73	5.90	52.50	Peak	74	-21.50
7.236	V	32.52	35.01	35.73	5.90	39.15	Avg	54	-14.85
9.648	V	45.53	35.58	37.83	7.22	55.01	Peak	74	-18.99
9.648	V	32.43	35.58	37.83	7.22	41.91	Avg	54	-12.09
12.06	V	46.22	35.00	39.82	6.67	57.71	Peak	74	-16.29
12.06	V	32.06	35.00	39.82	6.67	43.55	Avg	54	-10.45
Low Channel 2412 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.884	V	54.53	34.74	33.53	4.64	57.96	Peak	74	-16.04
4.884	V	39.59	34.74	33.53	4.64	43.02	Avg	54	-10.98
7.326	V	45.6	35.03	35.99	6.38	52.95	Peak	74	-21.05
7.326	V	32.25	35.03	35.99	6.38	39.60	Avg	54	-14.40
9.768	V	46.29	35.55	37.98	7.14	55.86	Peak	74	-18.14
9.768	V	32.69	35.55	37.98	7.14	42.26	Avg	54	-11.74
12.21	V	45.19	34.93	39.46	7.23	56.95	Peak	74	-17.05
12.21	V	31.96	34.93	39.46	7.23	43.72	Avg	54	-10.28
Mid Channel 2437 MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg	Limit @ 3m (dBuV/m)	Delta (dB)
4.924	V	50.4	34.73	33.64	4.68	53.98	Peak	74	-20.02
4.924	V	34.76	34.73	33.64	4.68	38.34	Avg	54	-15.66
7.386	V	45.65	35.05	36.15	6.66	53.41	Peak	74	-20.59
7.386	V	32.08	35.05	36.15	6.66	39.84	Avg	54	-14.16
9.848	V	46.01	35.54	38.07	7.08	55.61	Peak	74	-18.39
9.848	V	32.33	35.54	38.07	7.08	41.93	Avg	54	-12.07
12.31	V	45.21	34.83	39.19	7.72	57.29	Peak	74	-16.71
12.31	V	31.89	34.83	39.19	7.72	43.97	Avg	54	-10.03
High Channel 2462 MHz									


Table 49. Radiated Harmonic Emissions Test Results, 802.11n 20MHz, All Ports (6dBi Omni Antenna)

Note: All other emissions were measured at the noise floor of the spectrum analyzer


§ 15.247(d) Radiated Spurious Emissions – 802.11n 20MHz All Ports (6dBi Omni Antenna)

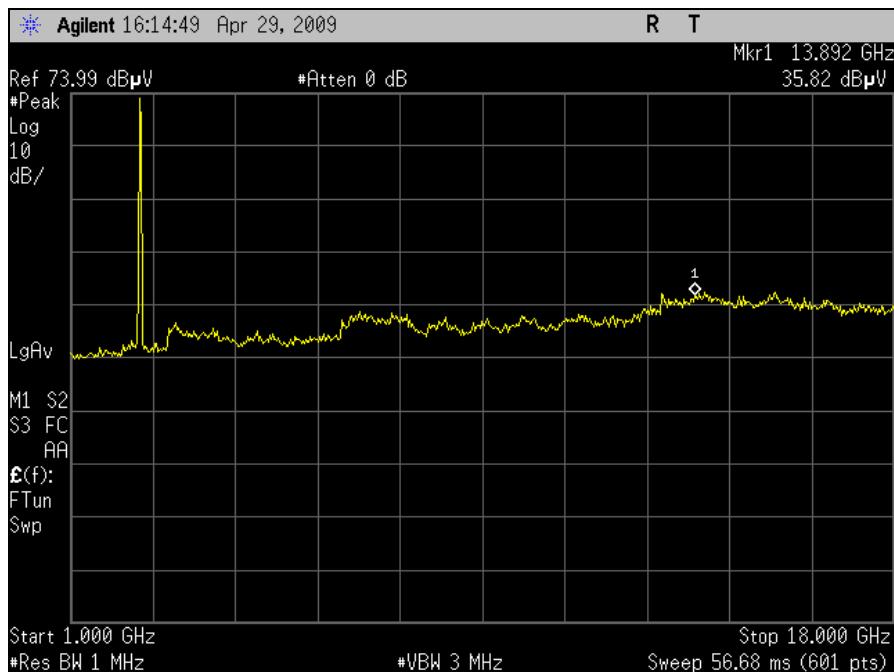

Plot 141. Radiated Spurious Emissions, Low Channel 1-18GHz – 802.11n 20MHz, All Ports (6dBi Omni Antenna)

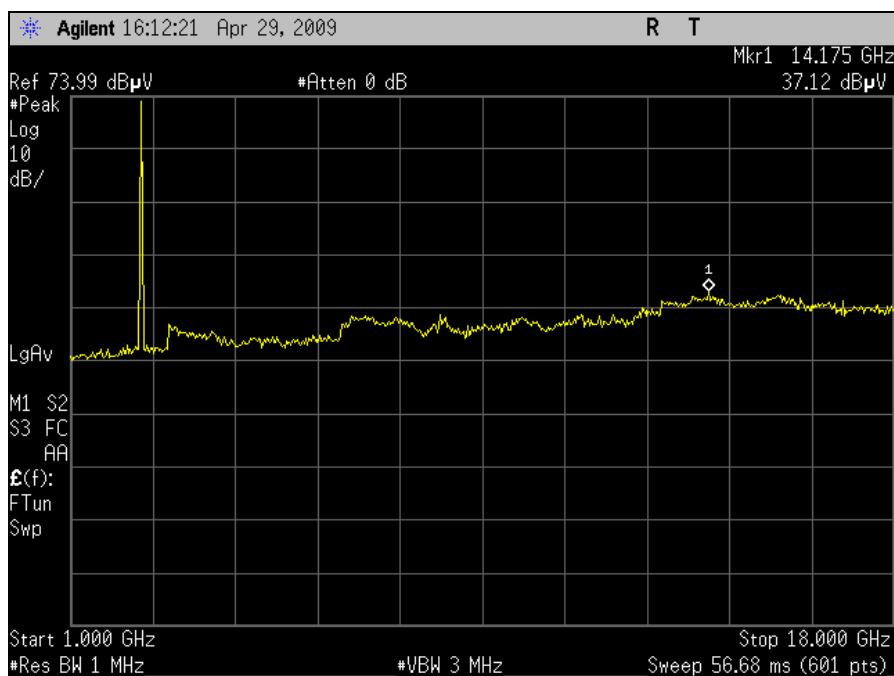


Plot 142. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11n 20MHz, All Ports (6dBi Omni Antenna)

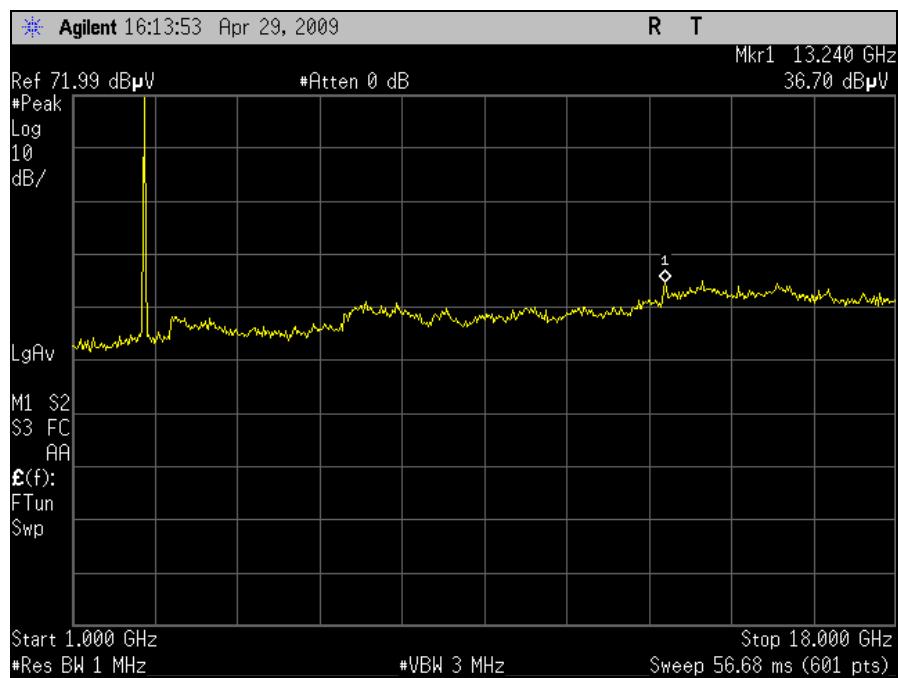


Plot 143. Radiated Spurious Emissions, High Channel 1-18GHz – 802.11n 20MHz, All Ports (6dBi Omni Antenna)

§ 15.247(d) Radiated Restricted Band Edge – 802.11n 20MHz All Ports (6dBi Omni Antenna)

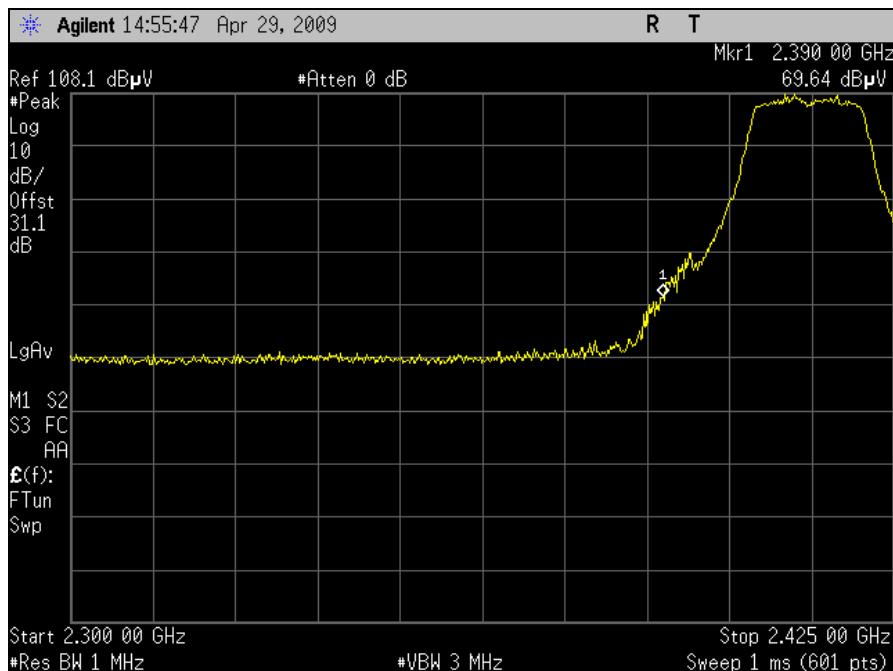


Plot 144. Radiated Restricted Band Edge, Low Channel Peak– 802.11n 20MHz, All Ports, 6dBi Omni Antenna

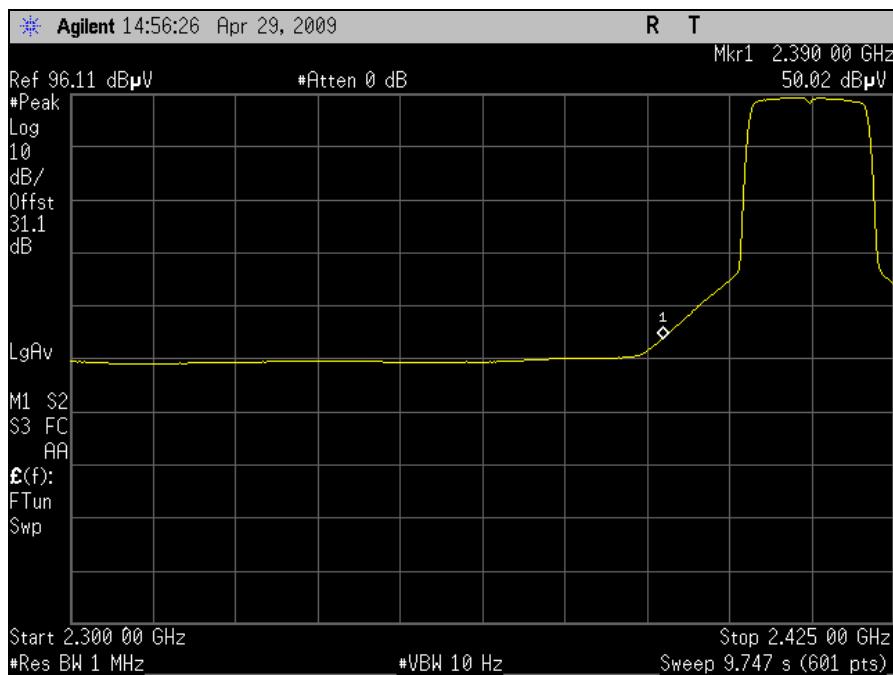


Plot 145. Radiated Restricted Band Edge, Low Channel Avg– 802.11n 20MHz, All Ports, 6dBi Omni Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11n 20MHz All Ports (6dBi Omni Antenna)

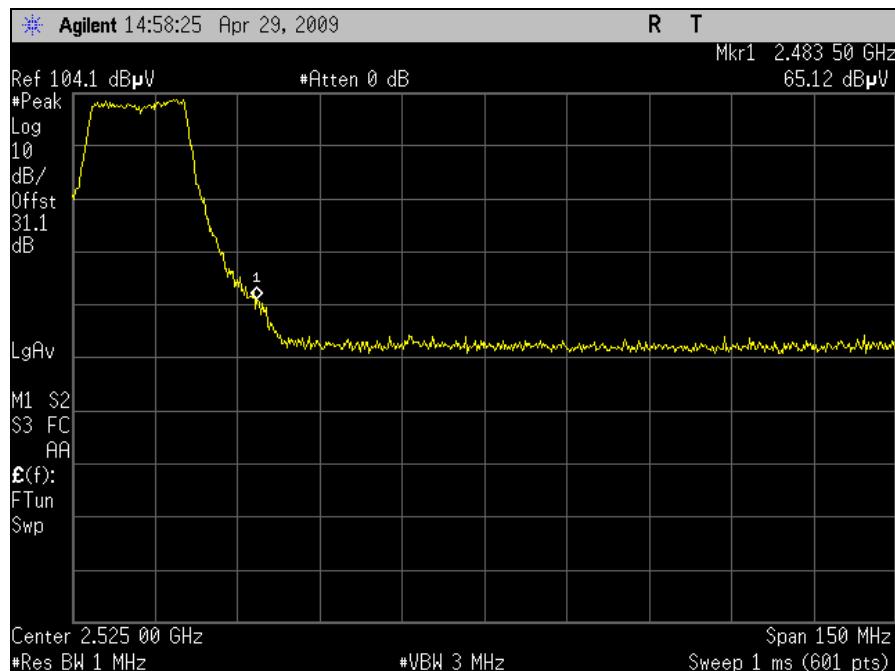

Plot 146. Radiated Restricted Band Edge, High Channel Peak– 802.11n 20MHz, All Ports, 6dBi Omni Antenna

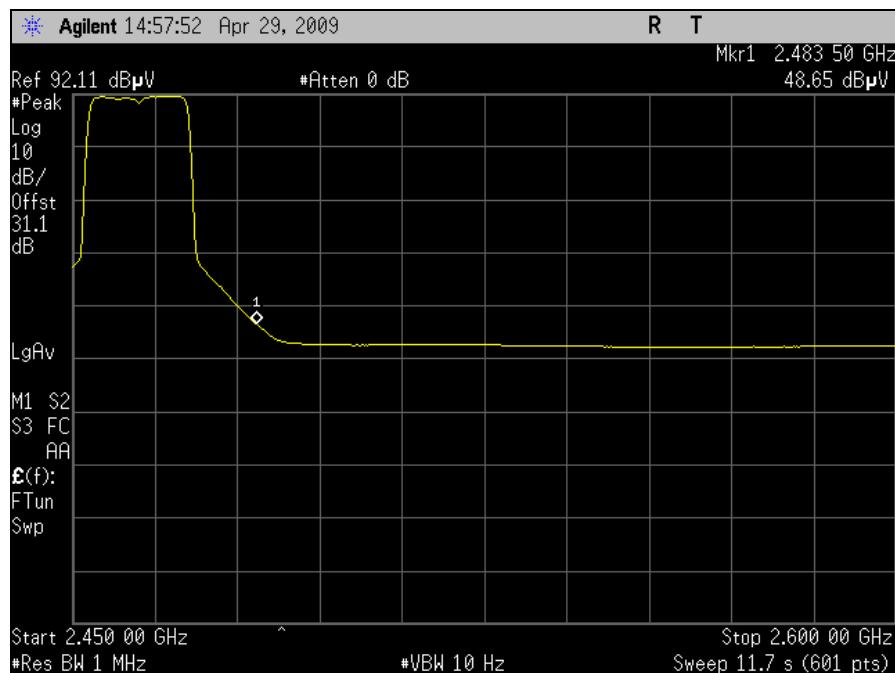

Plot 147. Radiated Restricted Band Edge, High Channel Avg– 802.11n 20MHz, All Ports, 6dBi Omni Antenna

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(d) Radiated Harmonic Emissions – 802.11n 40MHz All Ports (6dBi Omni Antenna)

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit Detector Peak / Avg	Limit @ 3m (dB μ V/m)	Delta (dB)
4.874	V	55.33	34.74	33.50	4.63	58.72	Peak	74	-15.28
4.874	V	40.86	34.74	33.50	4.63	44.25	Avg	54	-9.75
7.311	V	46.22	35.02	35.95	6.31	53.45	Peak	74	-20.55
7.311	V	32.02	35.02	35.95	6.31	39.25	Avg	54	-14.75
9.748	V	46.31	35.55	37.95	7.16	55.87	Peak	74	-18.13
9.748	V	32.56	35.55	37.95	7.16	42.12	Avg	54	-11.88
12.185	V	46.82	34.94	39.53	7.11	58.52	Peak	74	-15.48
12.185	V	31.98	34.94	39.53	7.11	43.68	Avg	54	-10.32
Mid Channel 2437 MHz									

Table 50. Radiated Harmonic Emissions Test Results, 802.11n 40MHz, All Ports (6dBi Omni Antenna)


Note: All other emissions were measured at the noise floor of the spectrum analyzer

§ 15.247(d) Radiated Spurious Emissions – 802.11n 40MHz All Ports (6dBi Omni Antenna)

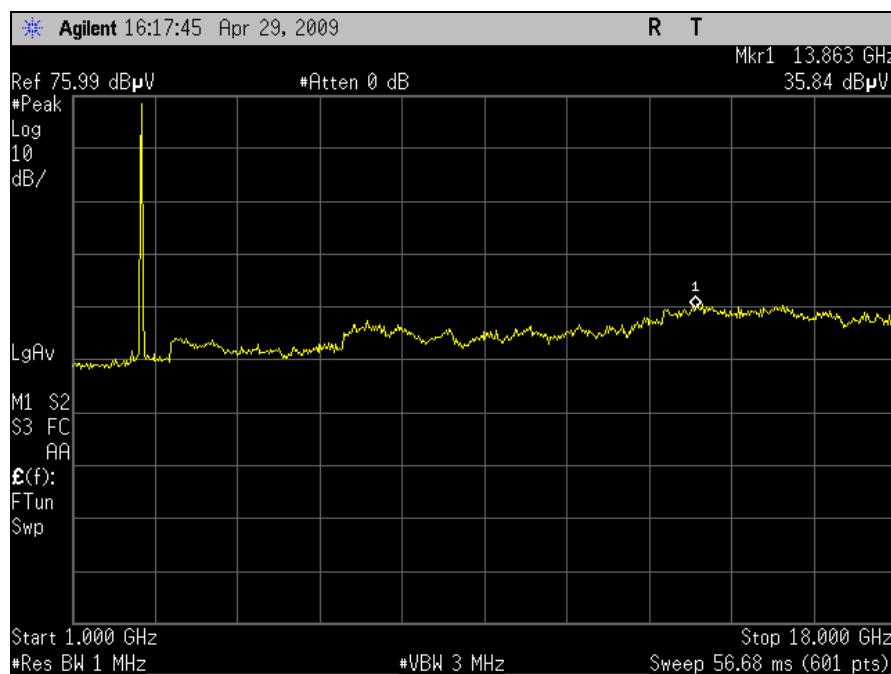


Plot 148. Radiated Spurious Emissions, Mid Channel 1-18GHz – 802.11n 40MHz, All Ports (6dBi Omni Antenna)

§ 15.247(d) Radiated Restricted Band Edge – 802.11n 40MHz All Ports (6dBi Omni Antenna)

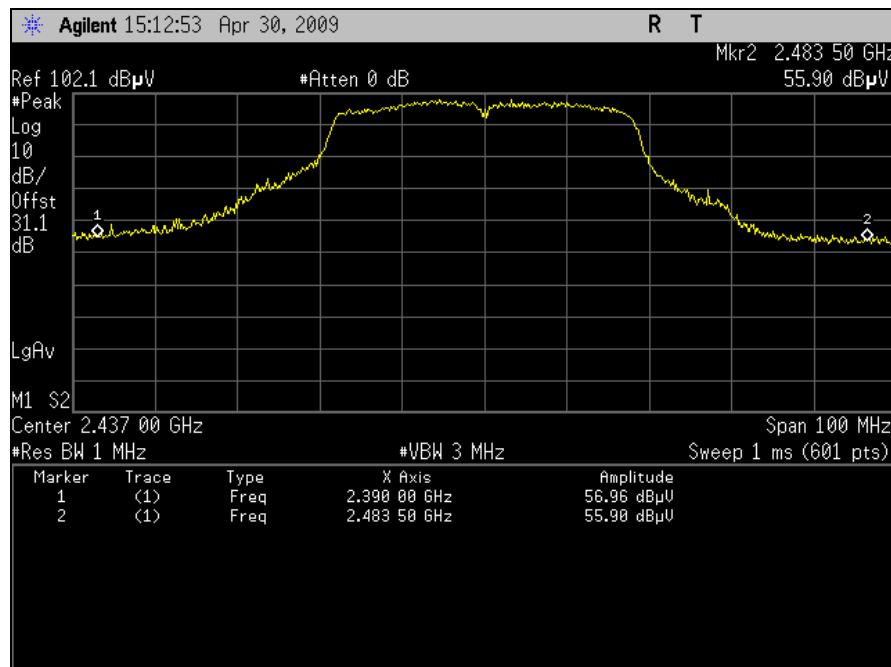


Plot 149. Radiated Restricted Band Edge, Mid Channel Peak– 802.11n 40MHz, All Ports, 6dBi Omni Antenna

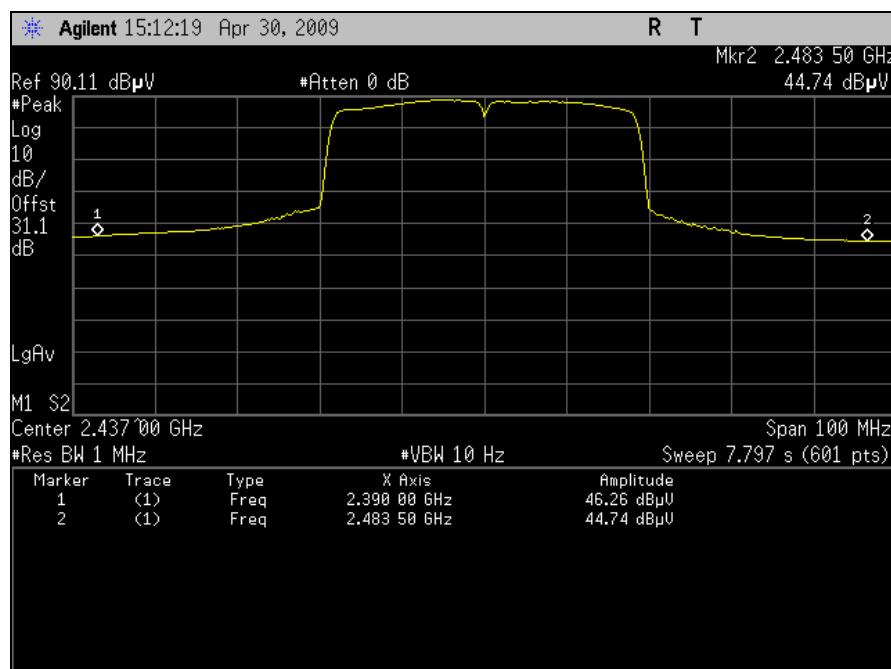


Plot 150. Radiated Restricted Band Edge, Mid Channel Avg– 802.11n 40MHz, All Ports, 6dBi Omni Antenna

§ 15.247(d) Radiated Restricted Band Edge – 802.11n 40MHz All Ports (6dBi Omni Antenna)

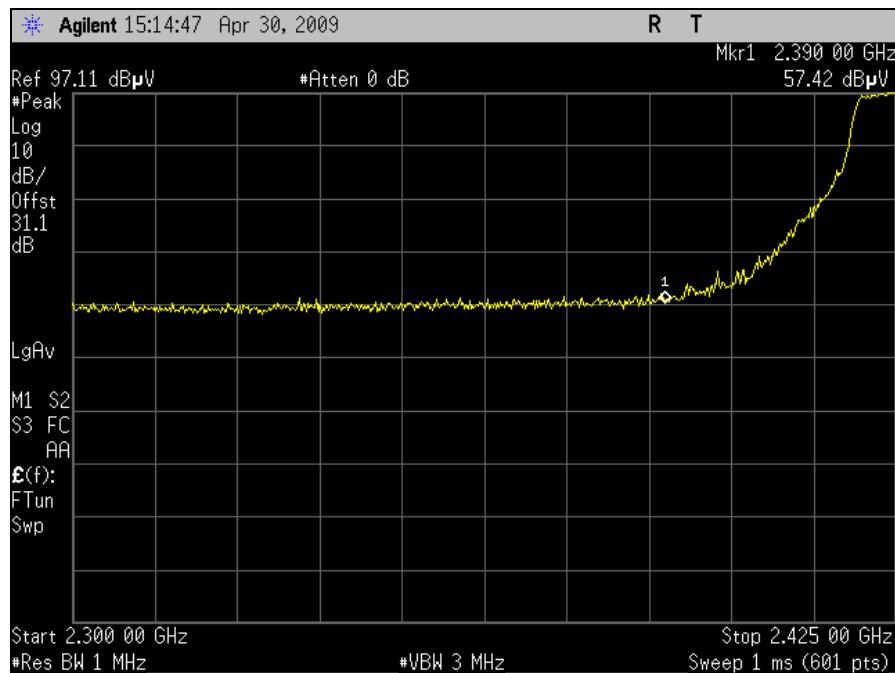


Plot 151. Radiated Restricted Band Edge, Mid Channel Peak– 802.11n 40MHz, All Ports, 6dBi Omni Antenna (2300MHz)

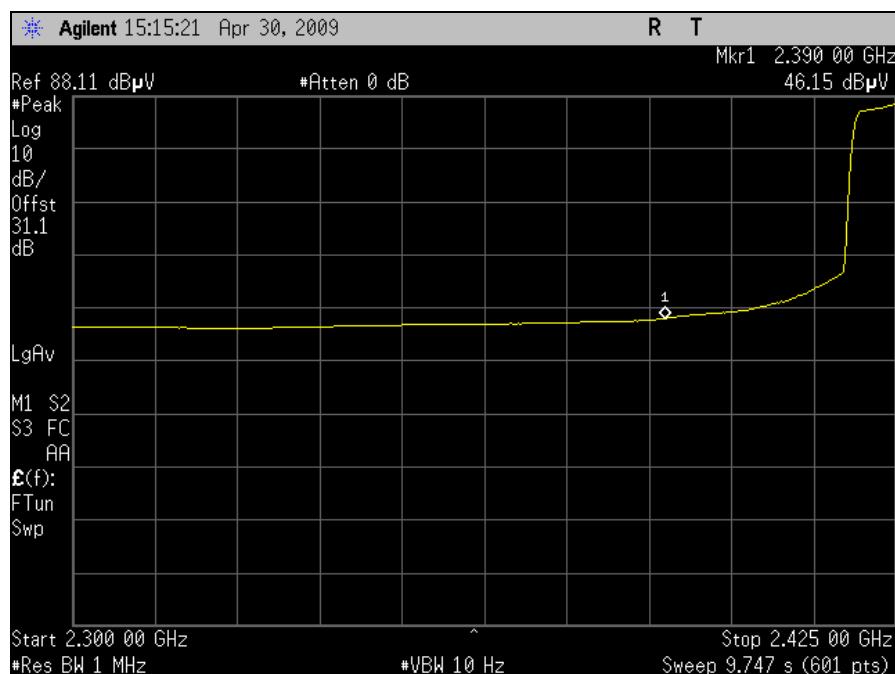


Plot 152. Radiated Restricted Band Edge, Mid Channel Avg– 802.11n 40MHz, All Ports, 6dBi Omni Antenna (2300MHz)

§ 15.247(d) Radiated Restricted Band Edge – 802.11n 40MHz All Ports (6dBi Omni Antenna)

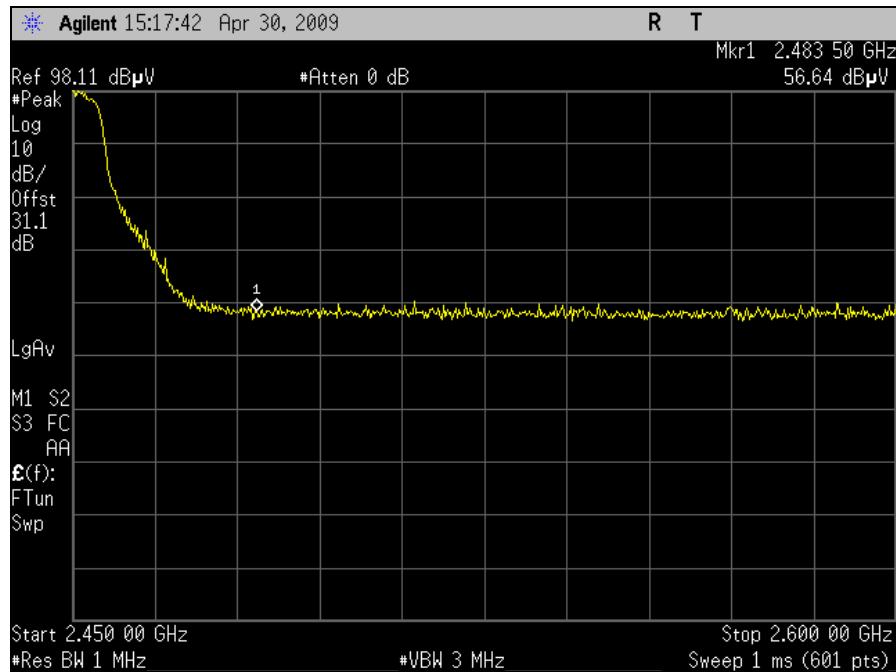


Plot 153. Radiated Restricted Band Edge, Mid Channel Peak– 802.11n 40MHz, All Ports, 6dBi Omni Antenna (2600MHz)

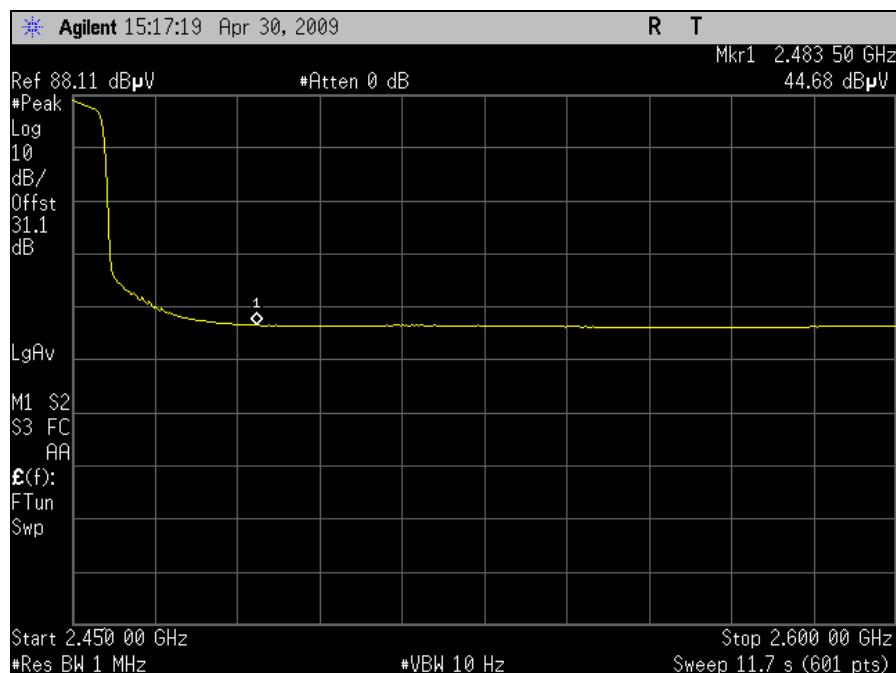


Plot 154. Radiated Restricted Band Edge, Mid Channel Avg– 802.11n 40MHz, All Ports, 6dBi Omni Antenna (2600MHz)

**Electromagnetic Compatibility Criteria for Intentional Radiators
Radiated Spurious Emissions – Test Setup Photographs**

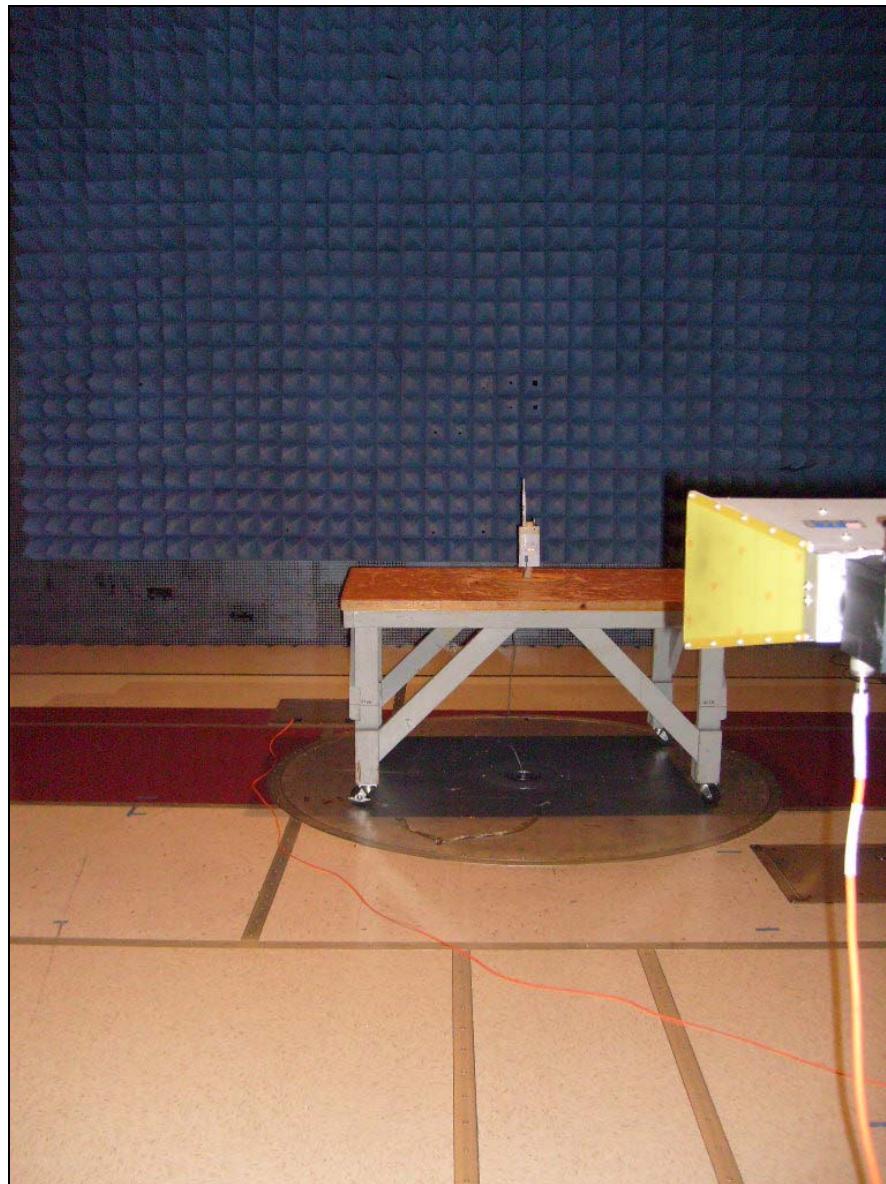

Photograph 6. Test Equipment and setup for various Radiated Measurements – 6dBi Omni Antenna

Radiated Spurious Emissions – Test Setup Photographs

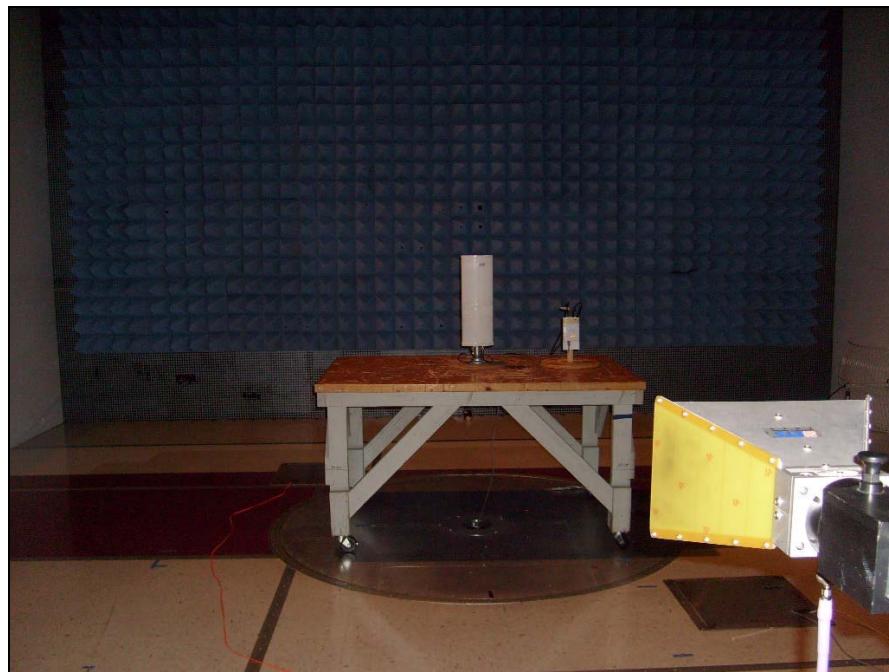

Photograph 7. Test Equipment and setup for various Radiated Measurements – 16dBi Sector Antenna



Photograph 8. Test Equipment and setup for Various Radiated Measurements – 18dBi Panel Antenna

Radiated Spurious Emissions – Test Setup Photographs



Photograph 9. Test Equipment and setup for various Radiated Measurements – 25dBi Grid Antenna



Photograph 10. Test Equipment and setup for various Radiated Measurements – Combined Omni Antennas

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Spurious Emissions Requirements –RF Conducted


Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

For frequencies 1-18GHz, measurements were made at coupler port of a 20dB directional coupler. The output of the coupler was terminated by a 50Ω load. For frequencies 18-40GHz a HP11970A and HP11970K harmonic mixer was used. Each harmonic mixer was fed with a SMA to wave guide adapter.

Test Results: Equipment complies with the Spurious Emissions Requirements – Radiated and RF Conducted limits of § 15.247 (d). For Radiated Emissions result, refer to section “§15.209: Radiated Emission Limits”. See following pages for detailed test results with RF Conducted Spurious Emissions and §15.205.


Test Engineer(s): Anderson Soungpanya

Test Date(s): 04/20/09 & 04/21/09

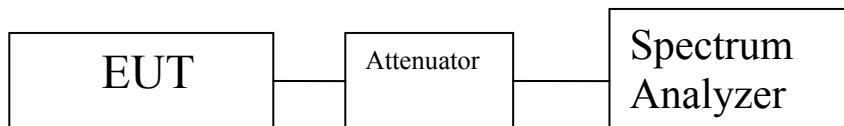


Block Diagram 3. Spurious Conducted Emissions Test Setup


Conducted Emissions – 802.11b Port 1

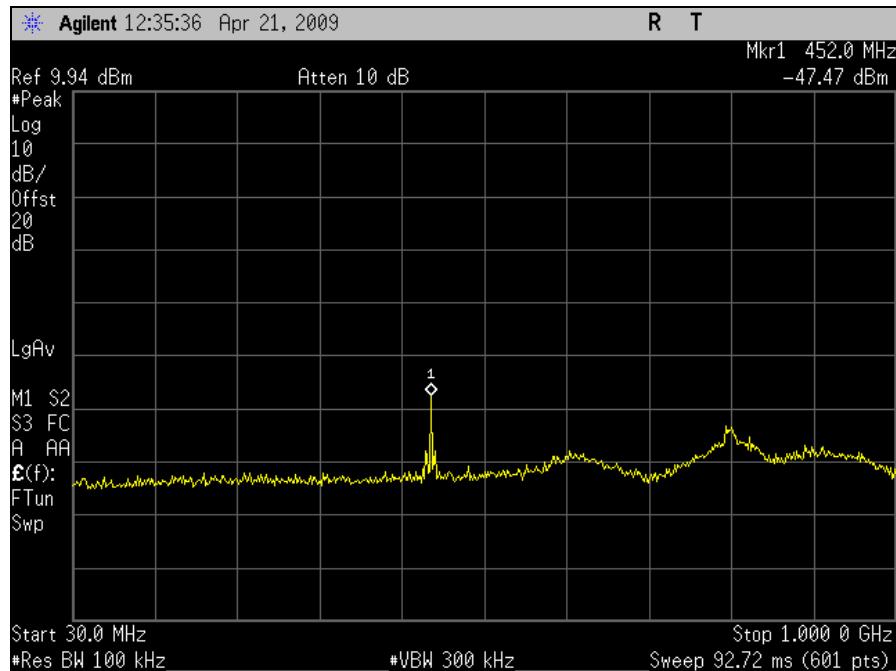


Plot 155. 802.11/b – Low Channel Conducted Emissions 30MHz - 1GHz

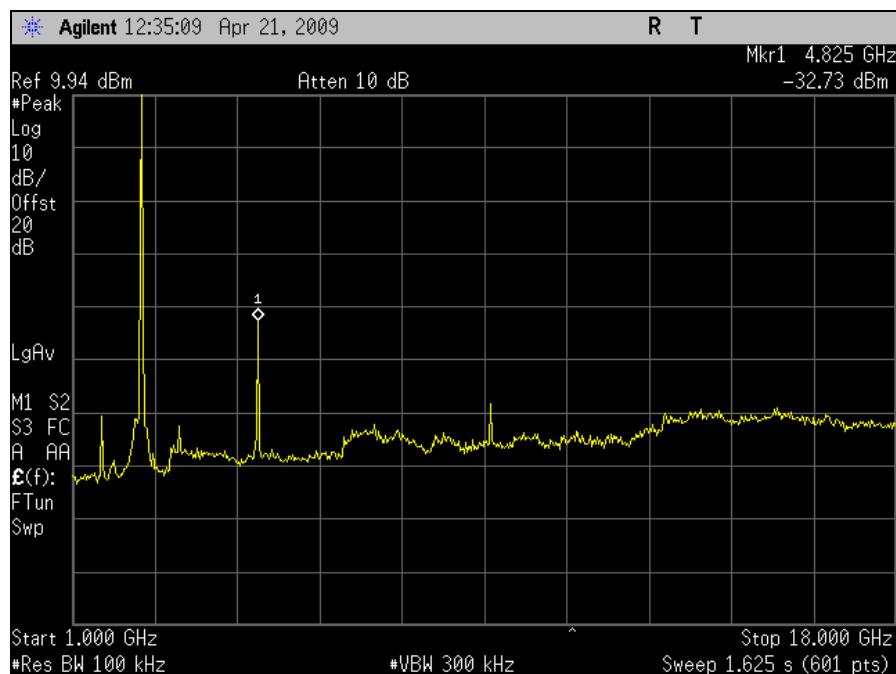


Plot 156. 802.11/b – Low Channel Conducted Emissions 1-18GHz

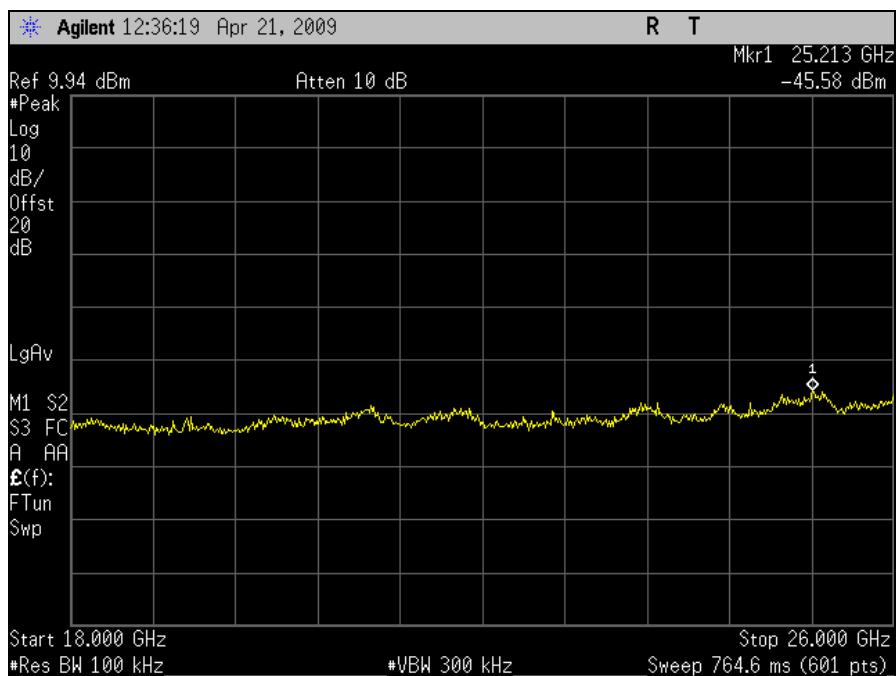


Plot 157. 802.11/b – Low Channel Conducted Emissions 18-26GHz

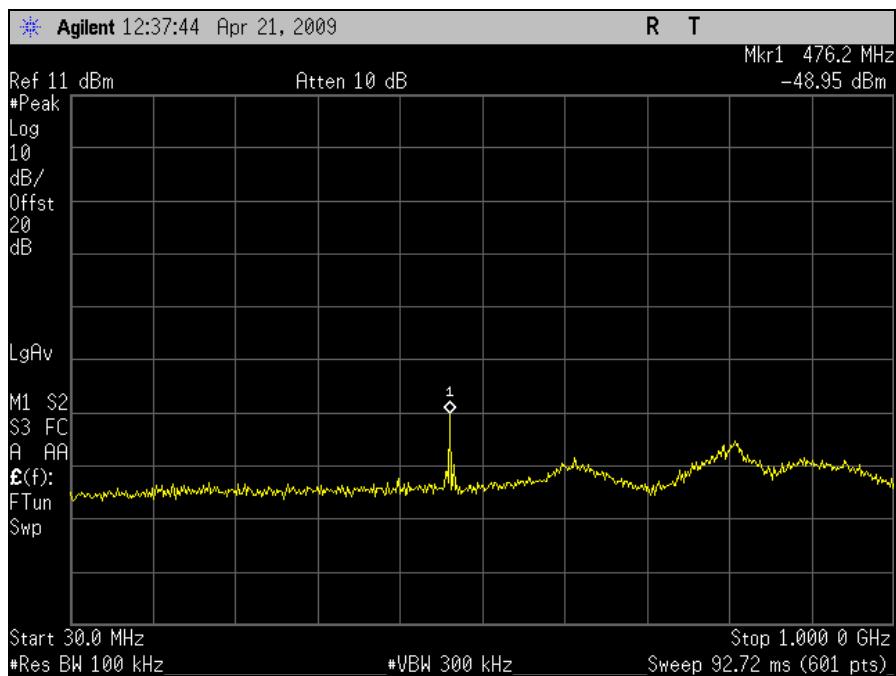


Plot 158. 802.11/b – Mid Channel Conducted Emissions 30MHz - 1GHz

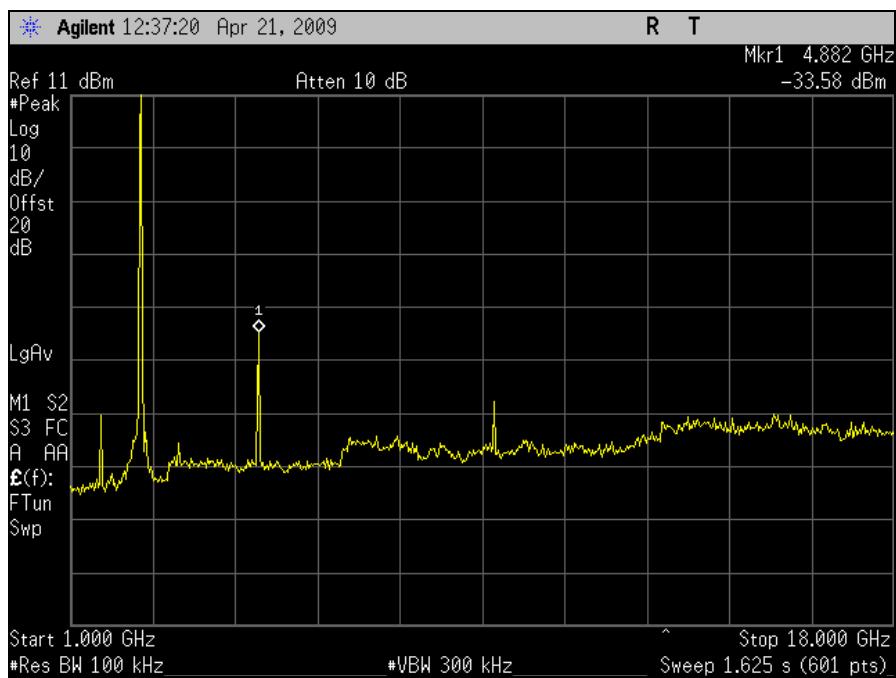


Plot 159. 802.11/b – Mid Channel Conducted Emissions 1-18GHz

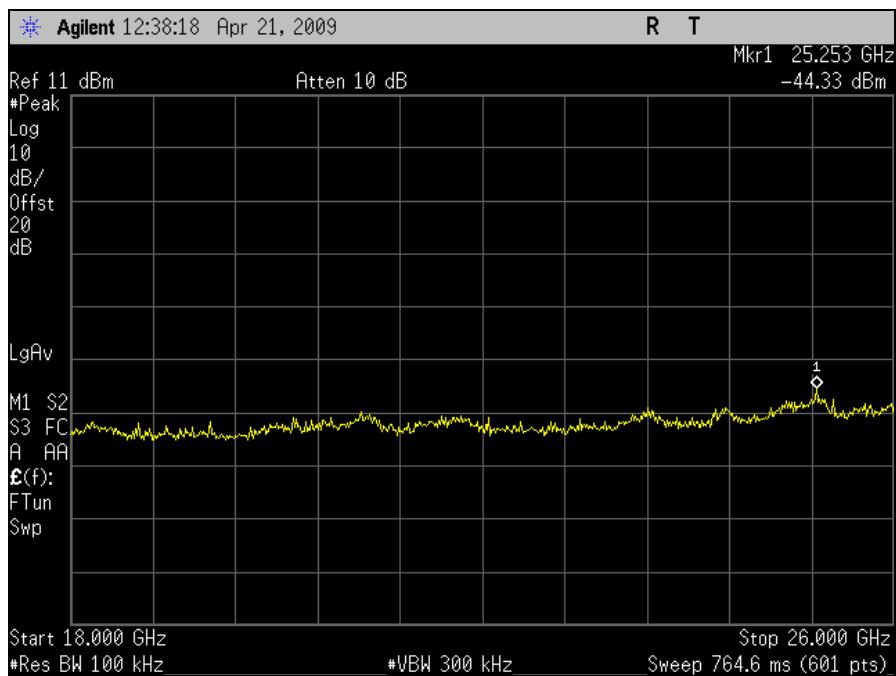


Plot 160. 802.11/b – Mid Channel Conducted Emissions 18-26GHz

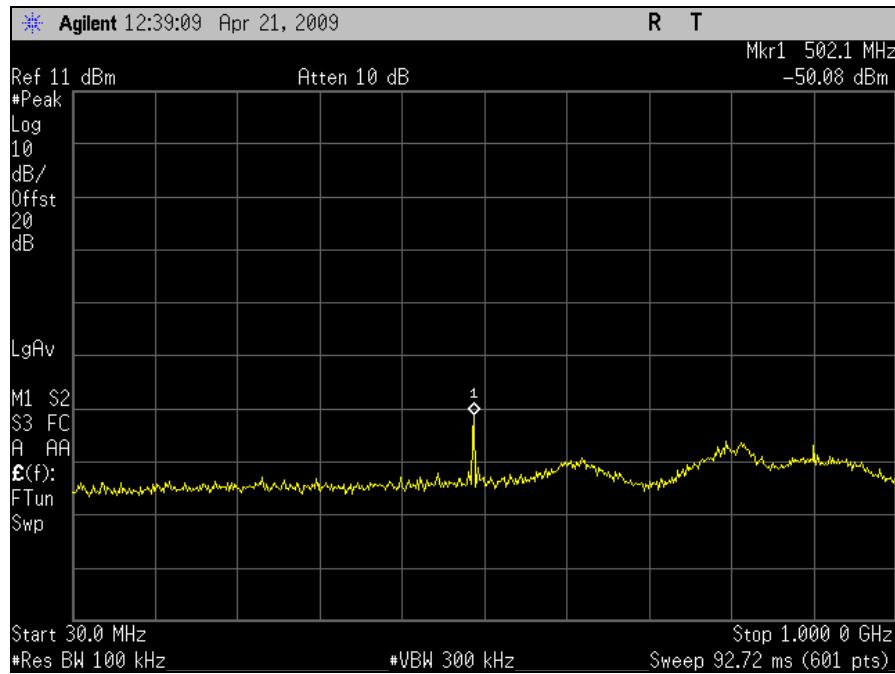

Plot 161. 802.11/b – High Channel Conducted Emissions 30MHz - 1GHz

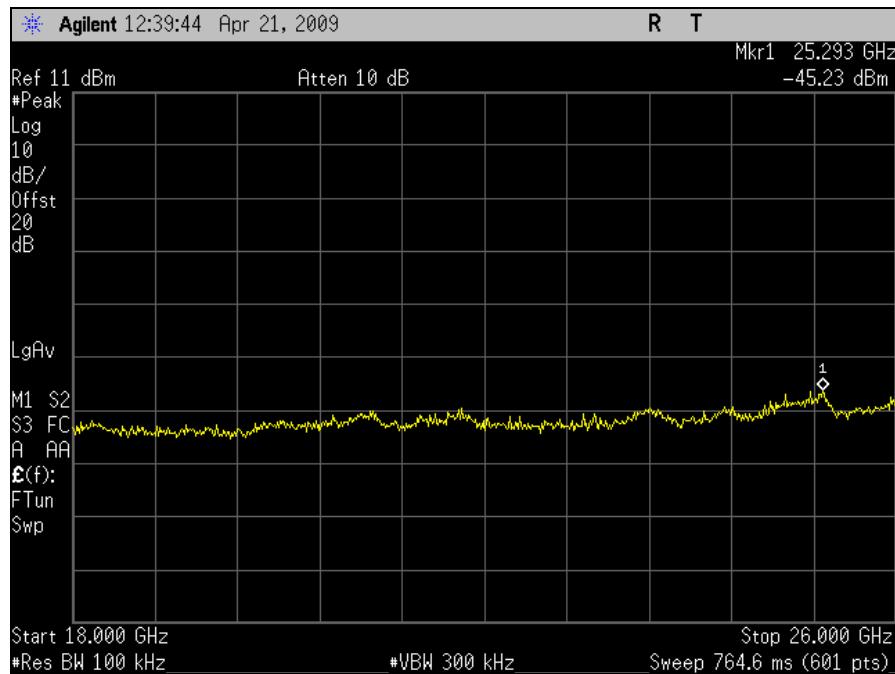


Plot 162. 802.11/b – High Channel Conducted Emissions 1-18GHz

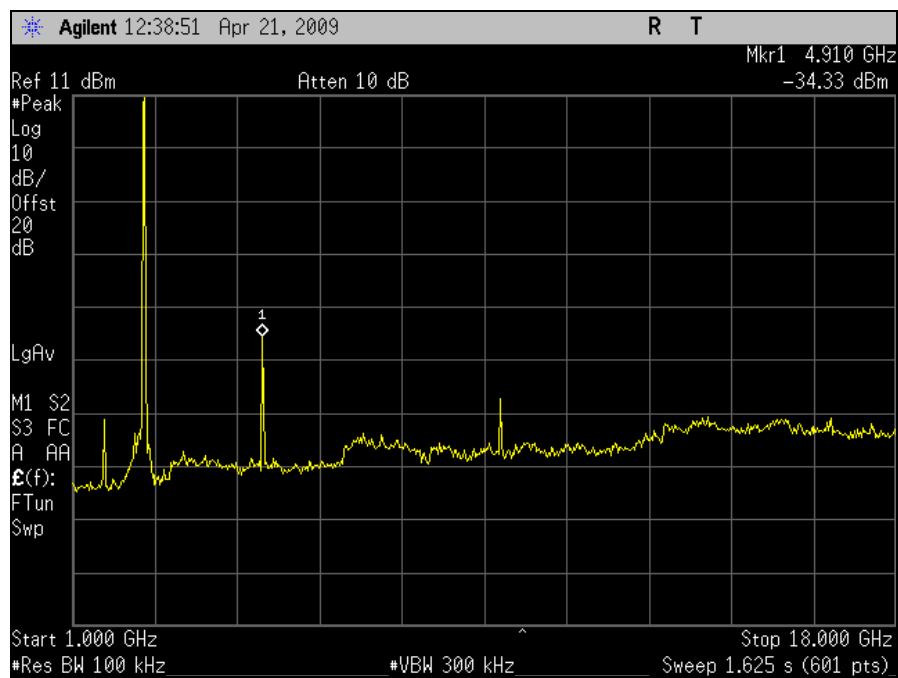


Plot 163. 802.11/b – High Channel Conducted Emissions 18-26GHz


Conducted Emissions – 802.11g Port 1

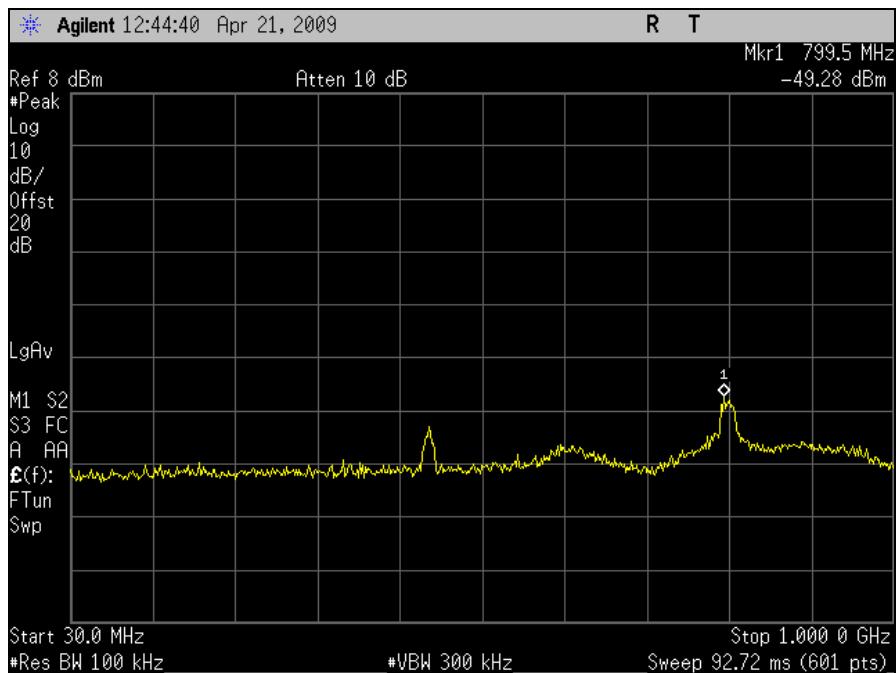


Plot 164. 802.11/g – Low Channel Conducted Emissions 30MHz - 1GHz

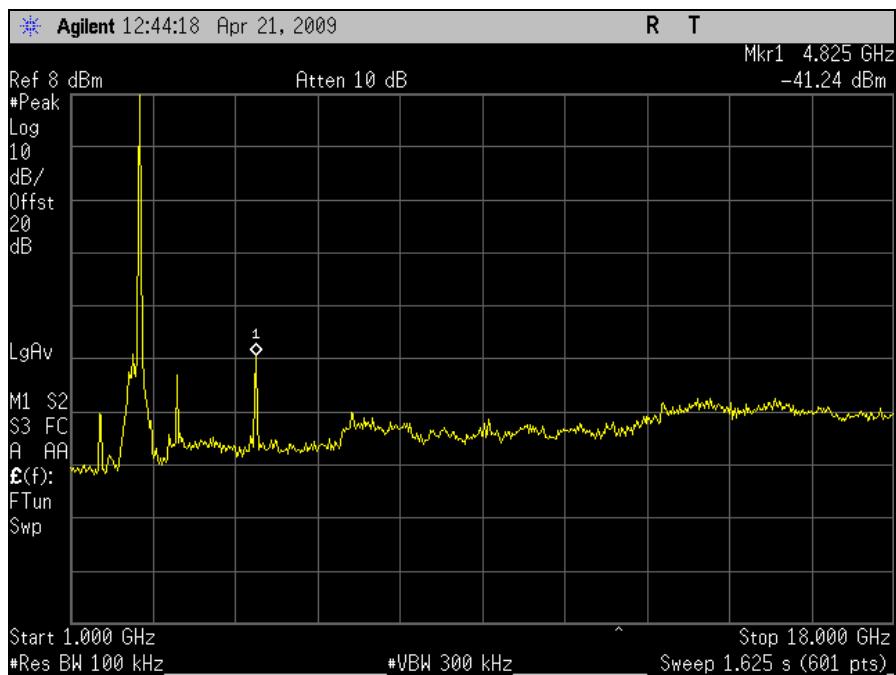


Plot 165. 802.11/g – Low Channel Conducted Emissions 1-18GHz

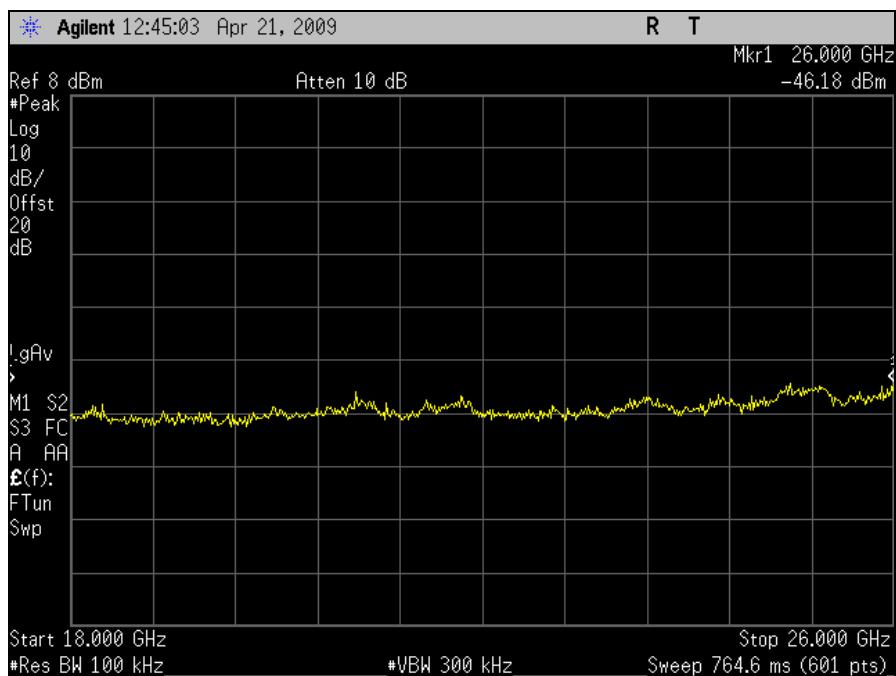


Plot 166. 802.11/g – Low Channel Conducted Emissions 18-26GHz

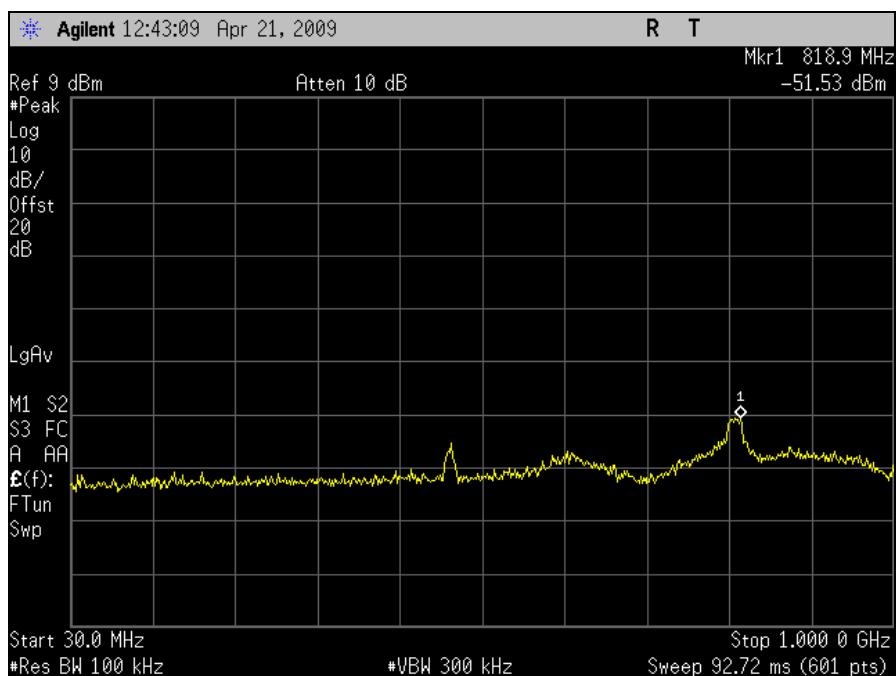


Plot 167. 802.11/g – Mid Channel Conducted Emissions 30MHz - 1GHz

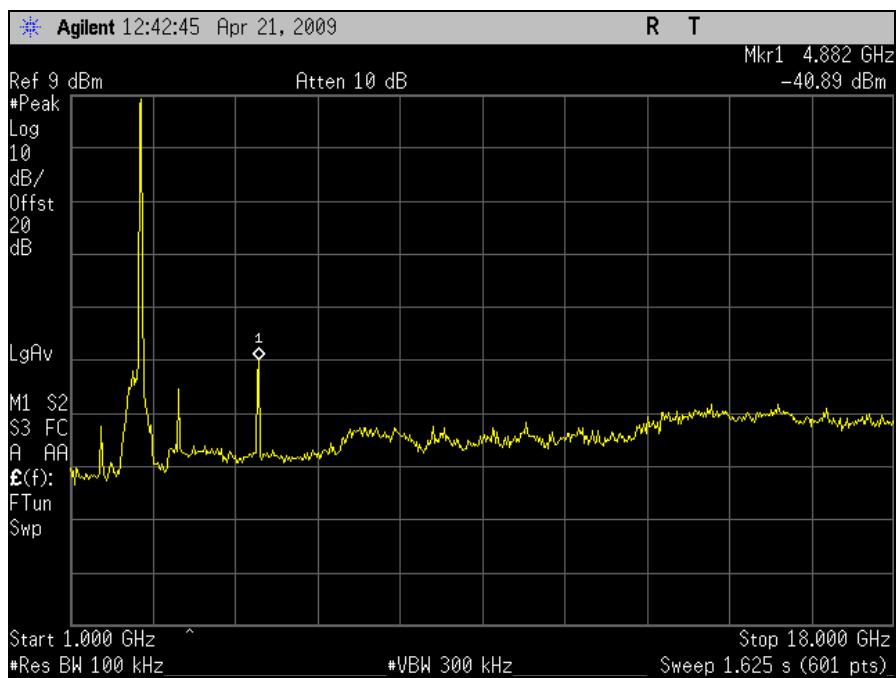


Plot 168. 802.11/g – Mid Channel Conducted Emissions 1-18GHz

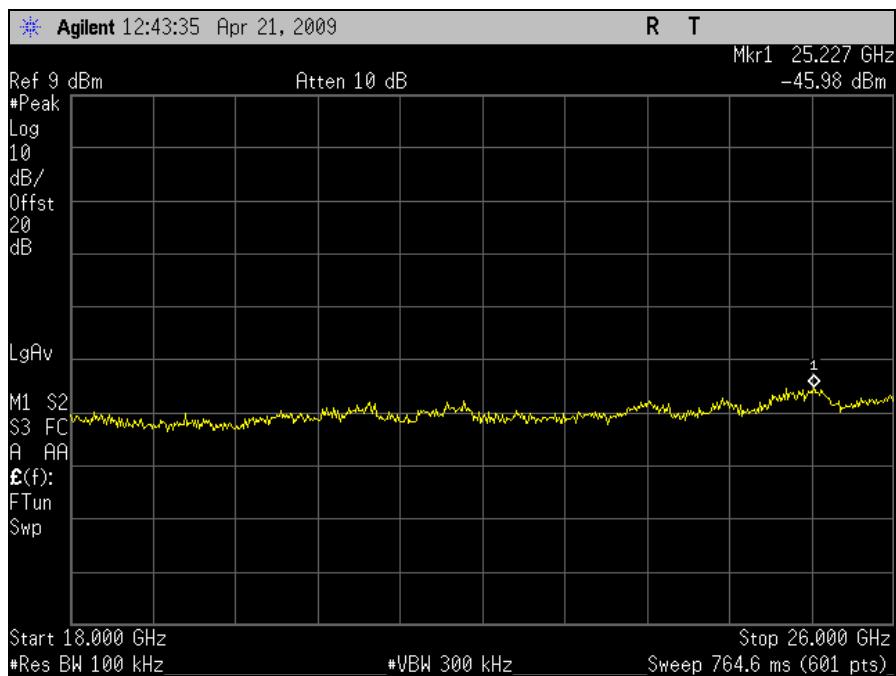


Plot 169. 802.11/g – Mid Channel Conducted Emissions 18-26GHz

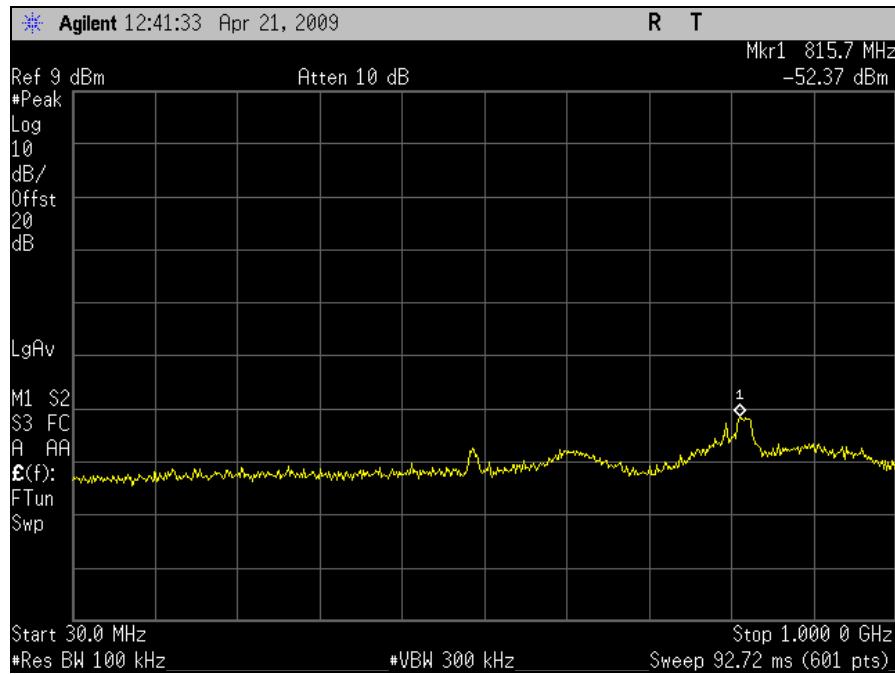

Plot 170. 802.11/g – High Channel Conducted Emissions 30MHz - 1GHz

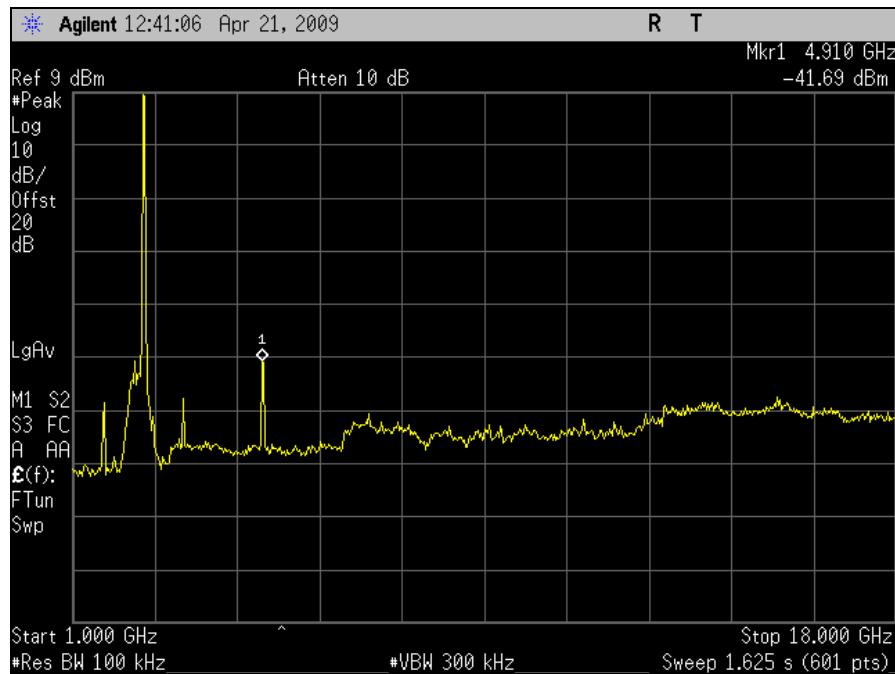


Plot 171. 802.11/g – High Channel Conducted Emissions 1-18GHz

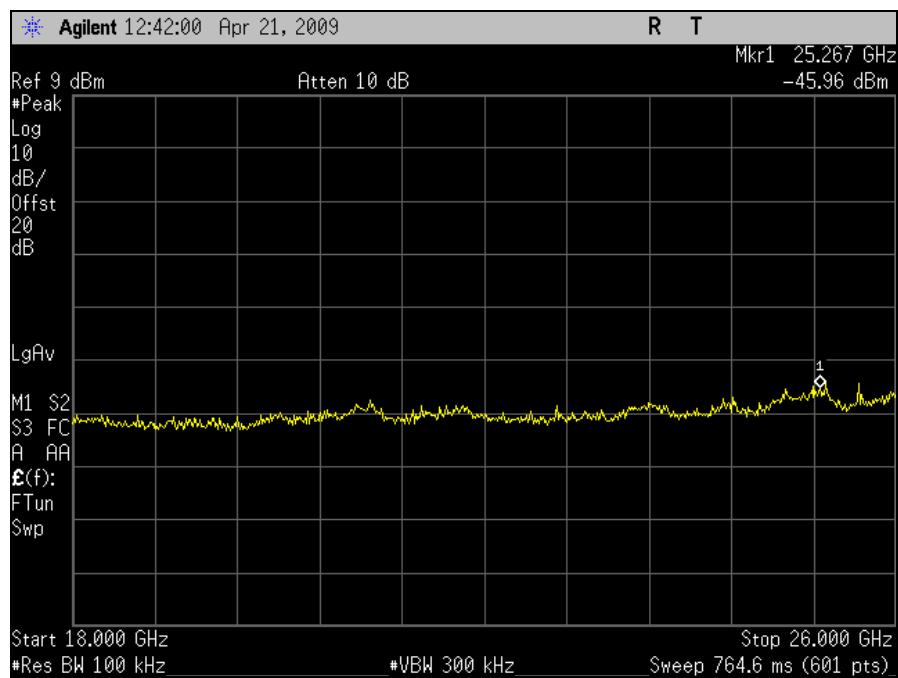


Plot 172. 802.11/g – High Channel Conducted Emissions 18-26GHz


Conducted Emissions – 802.11n 20MHz Port 1

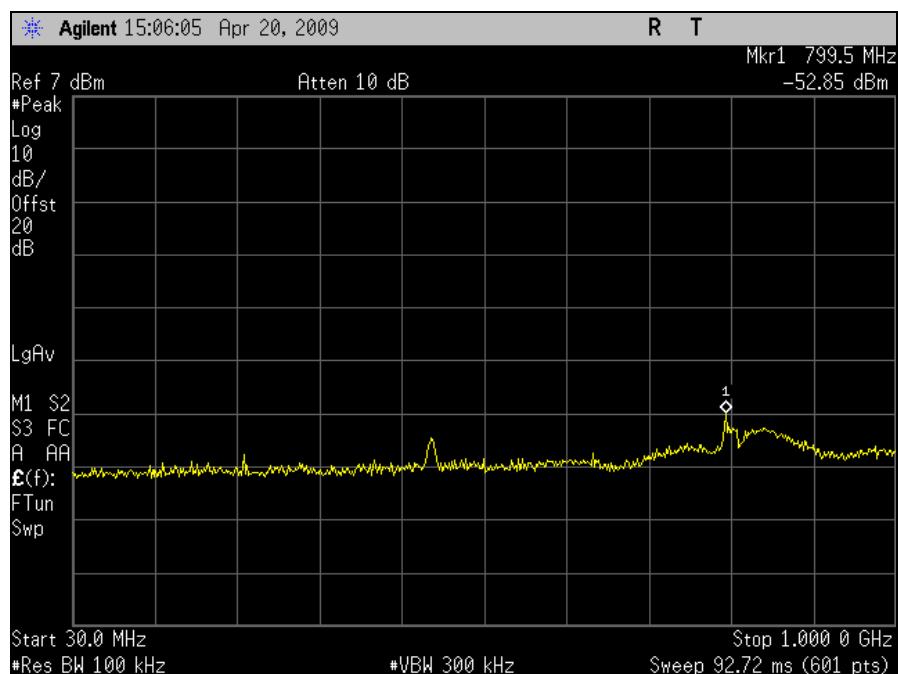


Plot 173. 802.11/n 20MHz – Low Channel Conducted Emissions 30MHz - 1GHz (Port 1)

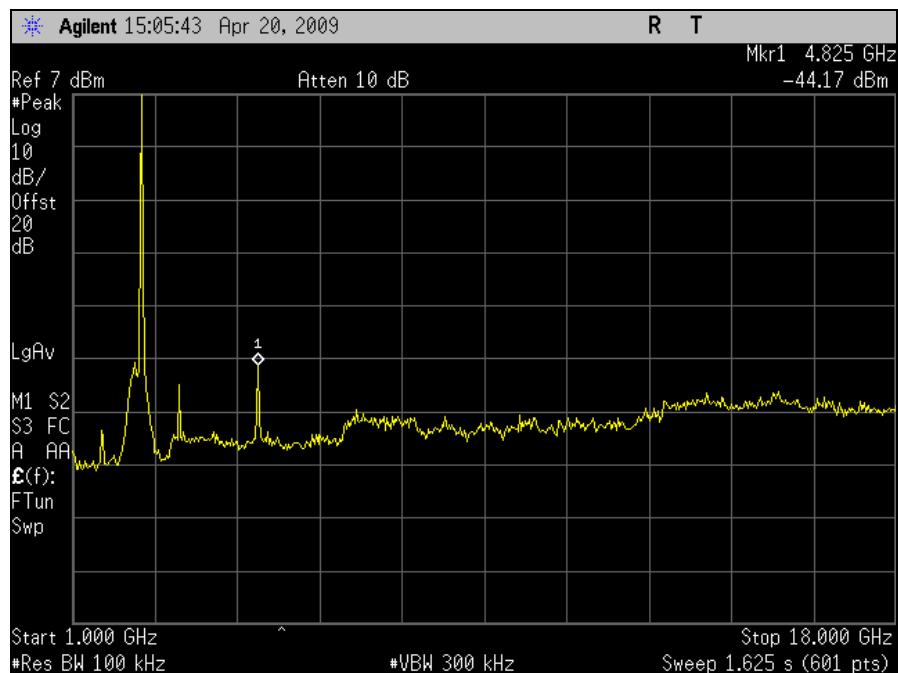


Plot 174. 802.11/n 20MHz – Low Channel Conducted Emissions 1-18GHz (Port 1)

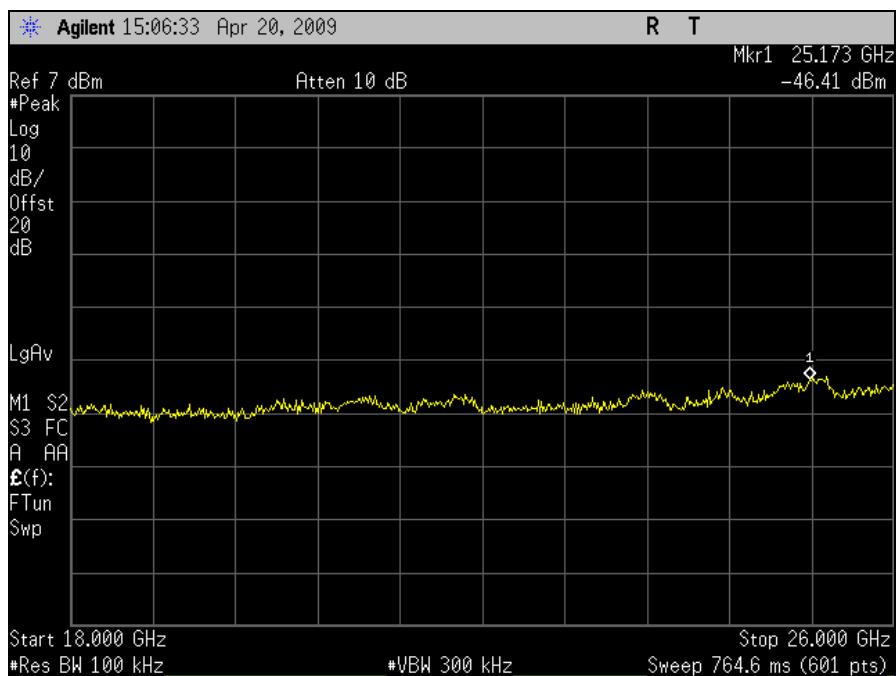


Plot 175. 802.11/n 20MHz – Low Channel Conducted Emissions 18-26GHz (Port 1)

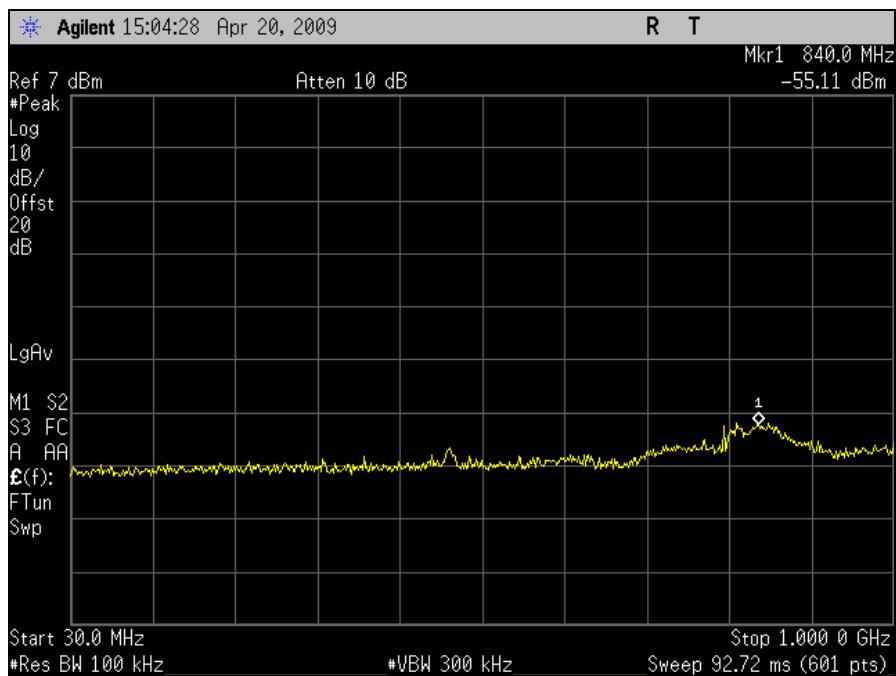


Plot 176. 802.11/n 20MHz – Mid Channel Conducted Emissions 30MHz - 1GHz (Port 1)

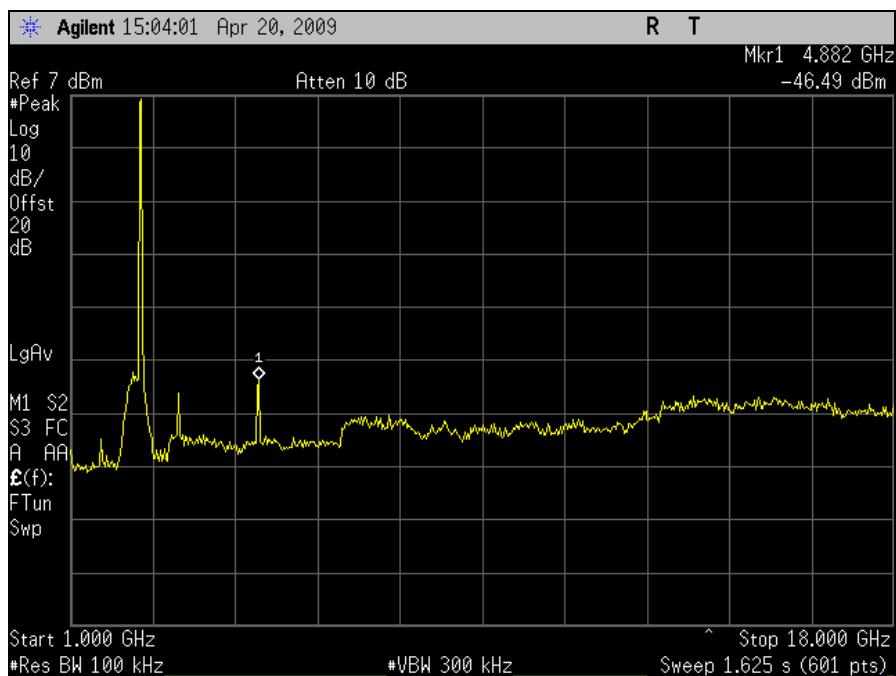


Plot 177. 802.11/n 20MHz – Mid Channel Conducted Emissions 1-18GHz (Port 1)

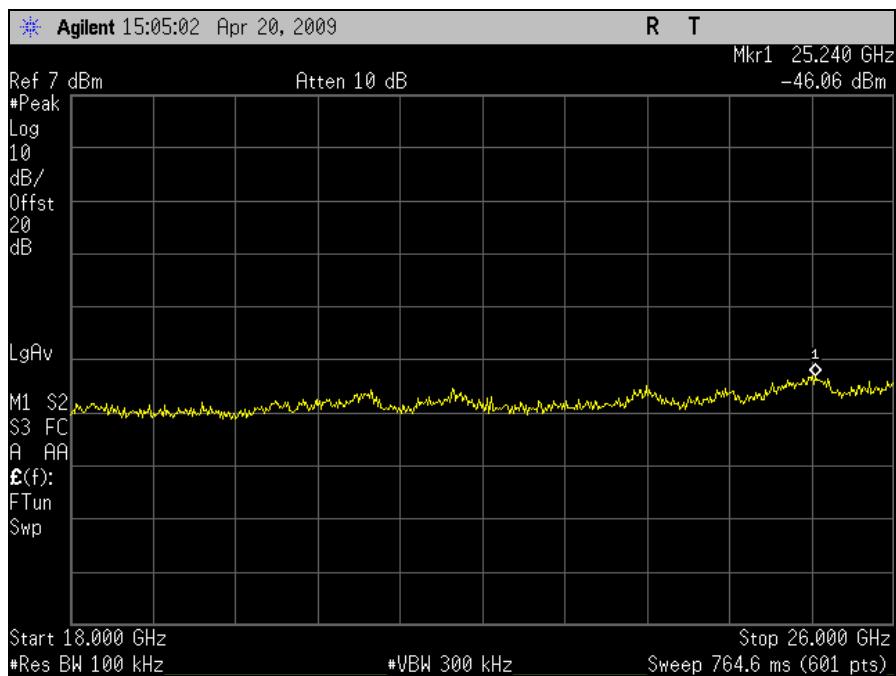


Plot 178. 802.11/n 20MHz – Mid Channel Conducted Emissions 18-26GHz (Port 1)

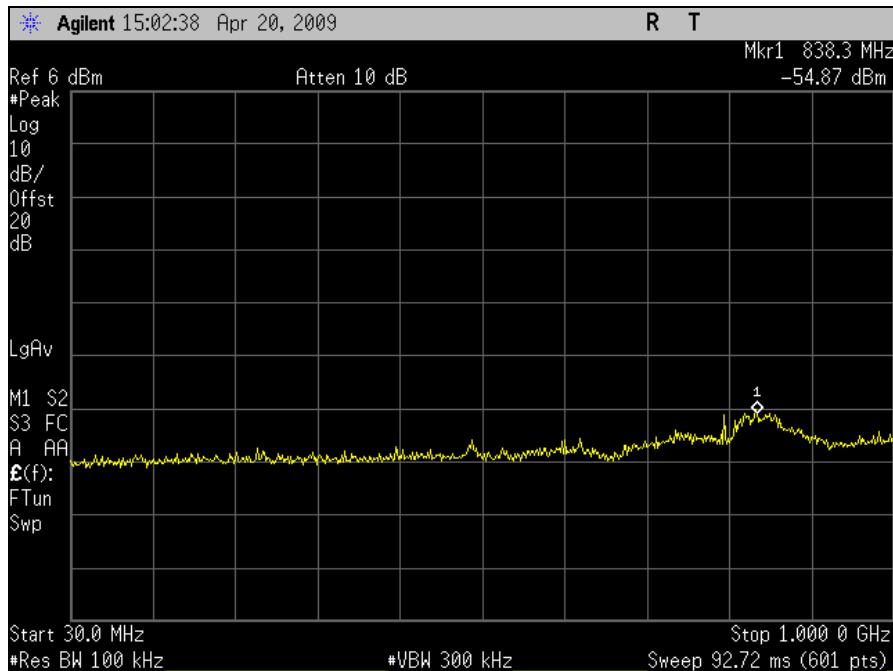

Plot 179. 802.11/n 20MHz – High Channel Conducted Emissions 30MHz - 1GHz (Port 1)

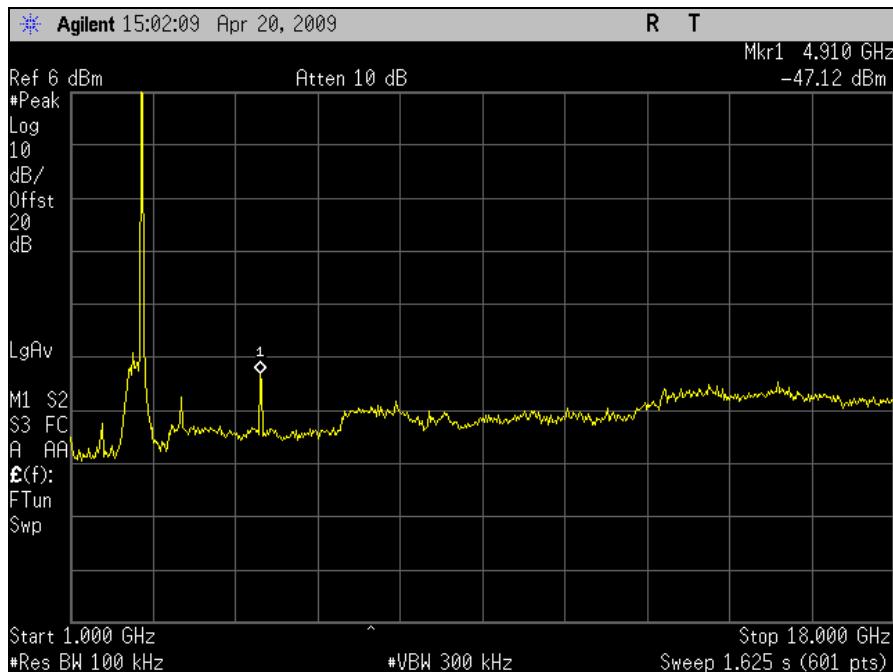


Plot 180. 802.11/n 20MHz – High Channel Conducted Emissions 1-18GHz (Port 1)

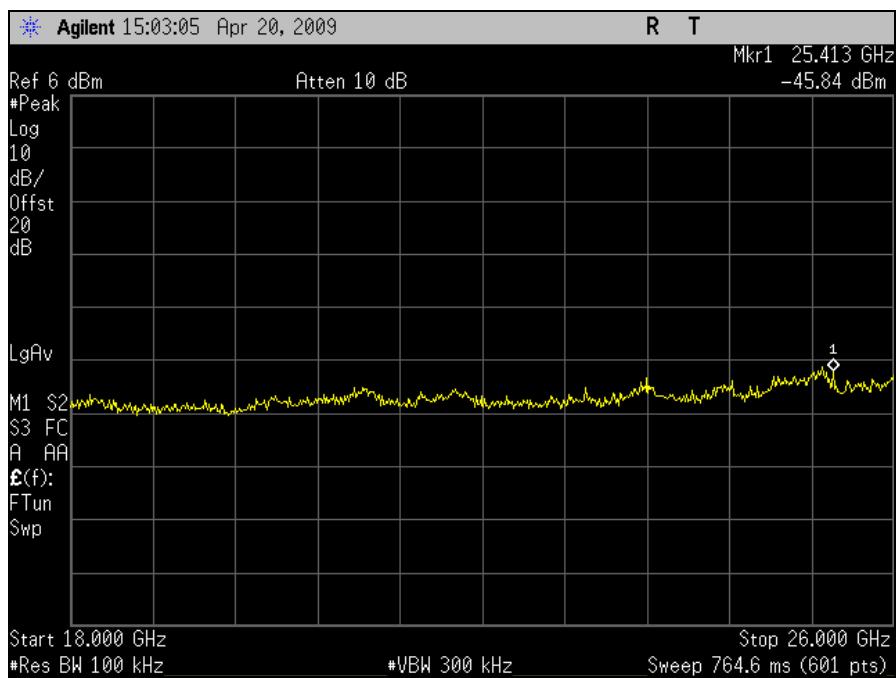


Plot 181. 802.11/n 20MHz – High Channel Conducted Emissions 18-26GHz (Port 1)


Conducted Emissions – 802.11n 40MHz Port 1

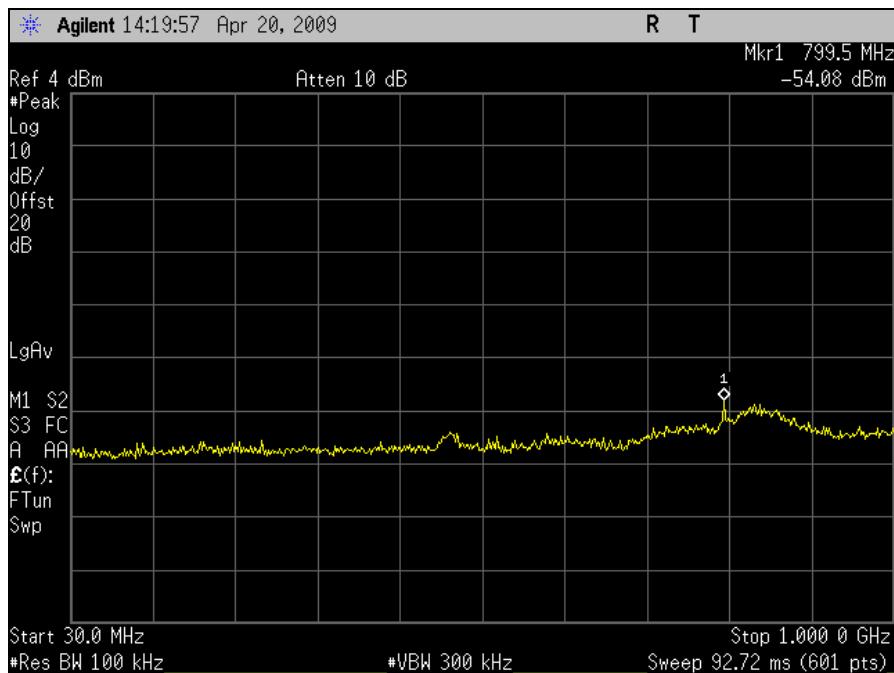

Plot 182. 802.11/n 40MHz – Mid Channel Conducted Emissions 30MHz - 1GHz (Port 1)

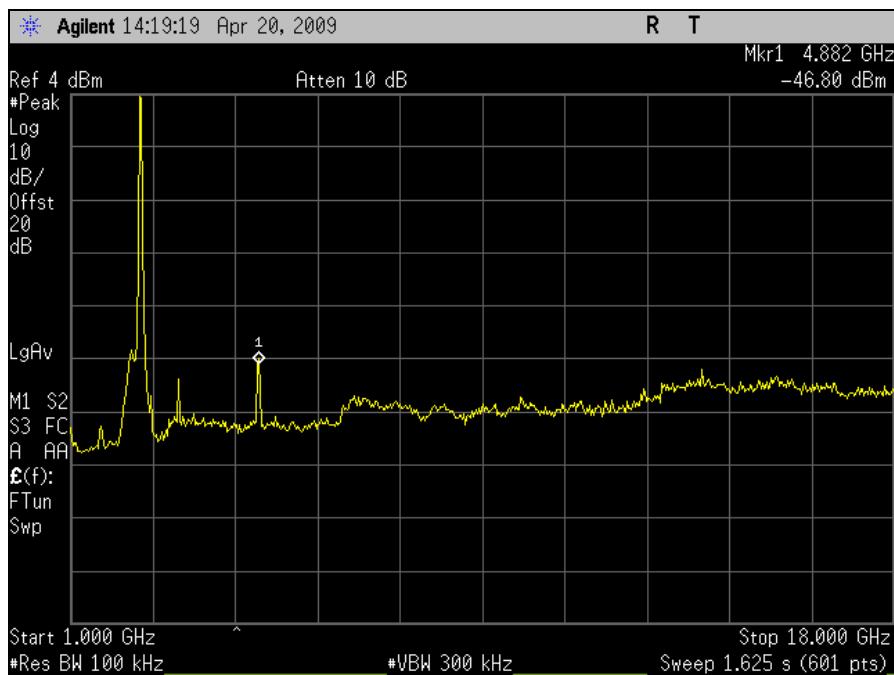


Plot 183. 802.11/n 40MHz – Mid Channel Conducted Emissions 1-18GHz (Port 1)

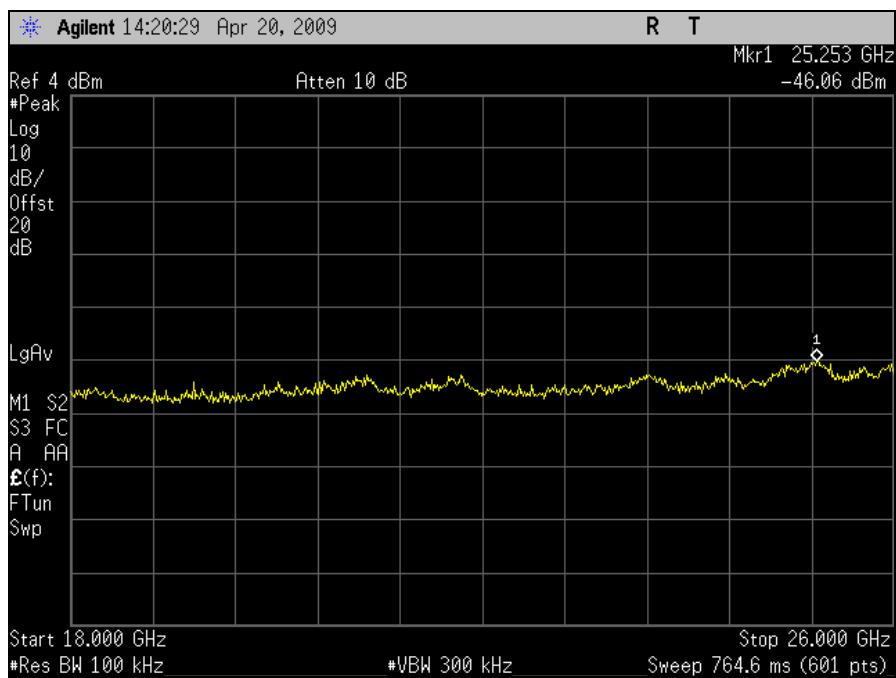


Plot 184. 802.11/n 40MHz – Mid Channel Conducted Emissions 18-26GHz (Port 1)


Conducted Emissions – 802.11n 20MHz Port 2

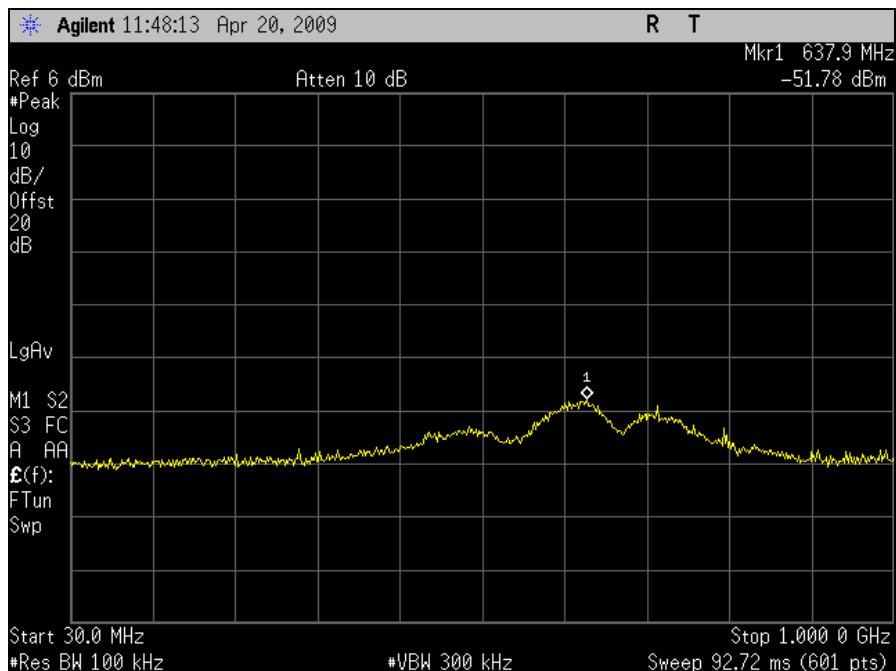

Plot 185. 802.11/n 20MHz – Low Channel Conducted Emissions 30MHz - 1GHz (Port 2)

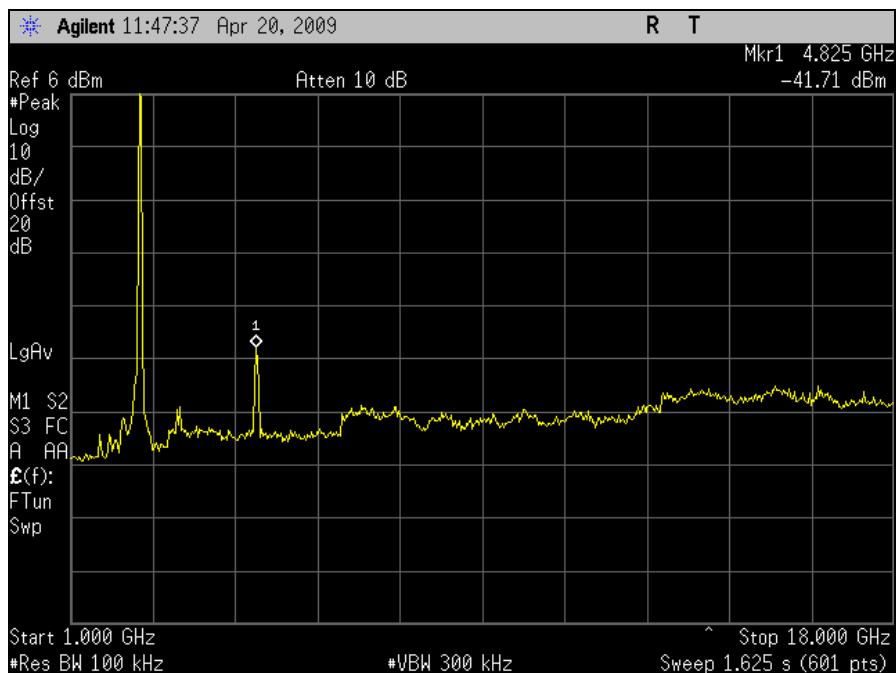


Plot 186. 802.11/n 20MHz – Low Channel Conducted Emissions 1-18GHz (Port 2)

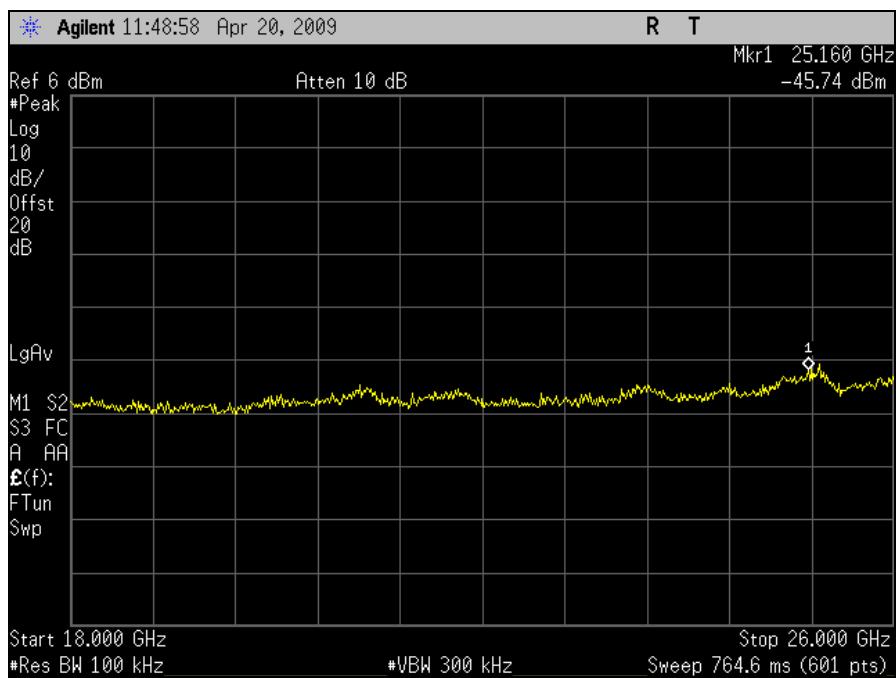


Plot 187. 802.11n 20MHz – Low Channel Conducted Emissions 18-26GHz (Port 2)


Conducted Emissions – 802.11n 40MHz Port 2

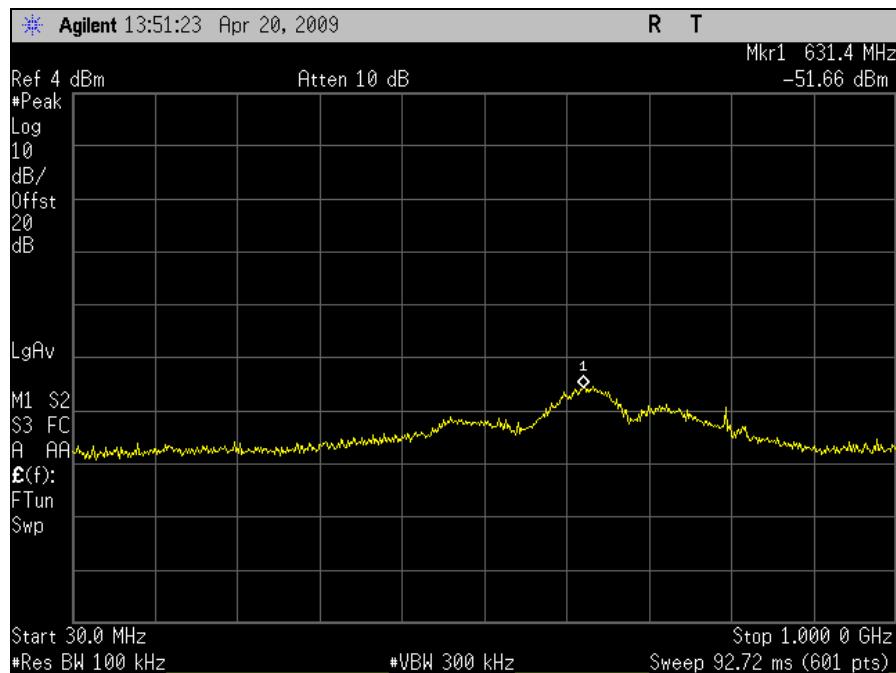

Plot 188. 802.11/n 40MHz – Mid Channel Conducted Emissions 30MHz - 1GHz (Port 2)

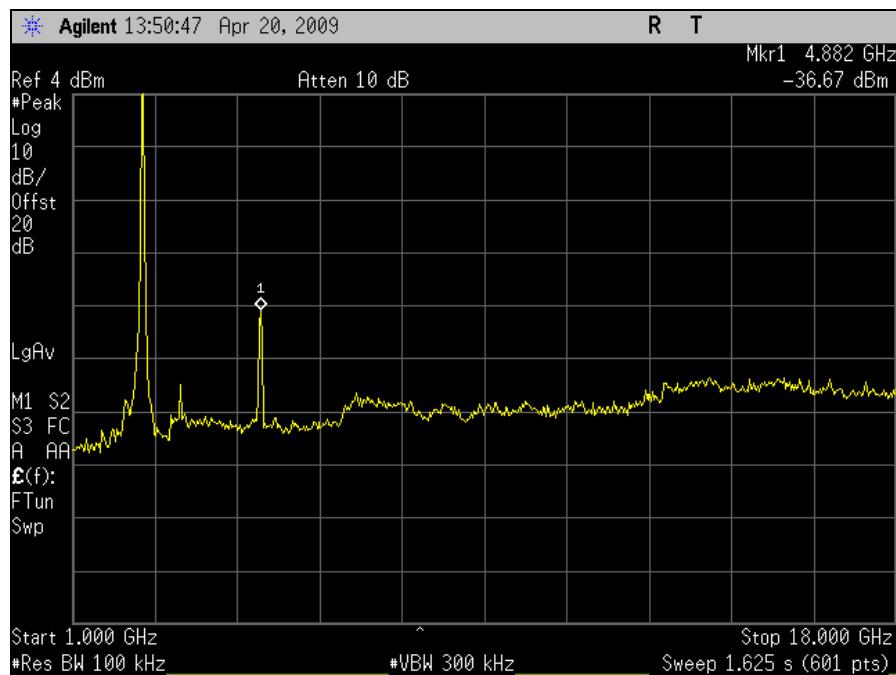


Plot 189. 802.11/n 40MHz – Mid Channel Conducted Emissions 1-18GHz (Port 2)

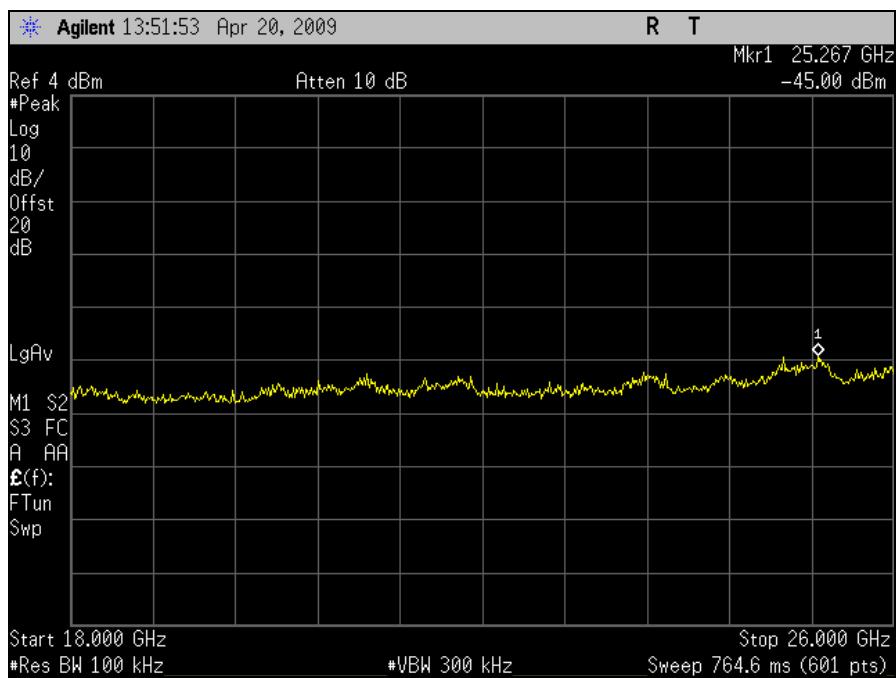


Plot 190. 802.11/n 40MHz – Mid Channel Conducted Emissions 18-26GHz (Port 2)

§ 15.247 Spurious Emissions Requirements –Band Edge (Conducted)

Conducted Band Edge – 802.11b Port 1

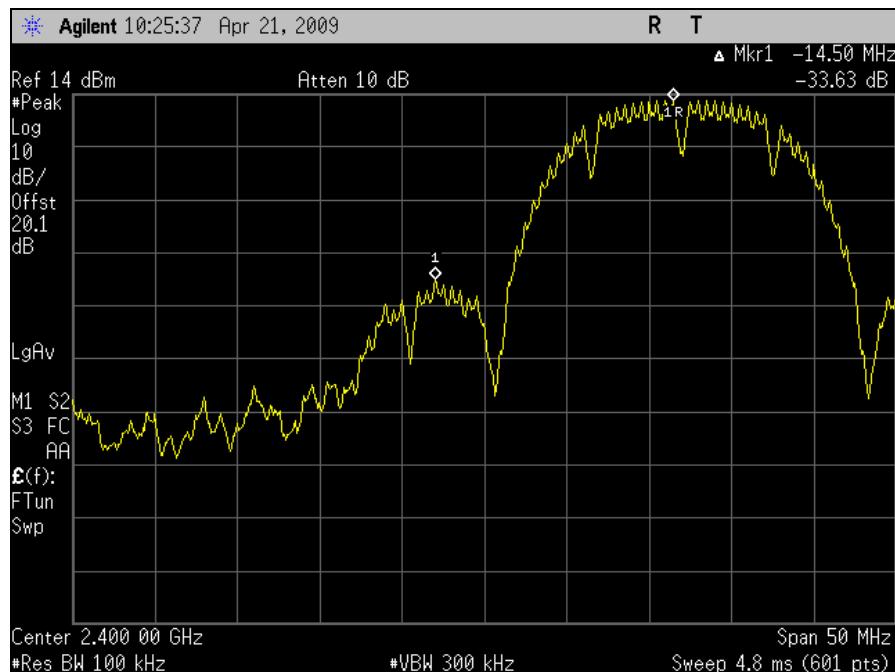


Plot 191. 802.11/b – Lower Band Edge

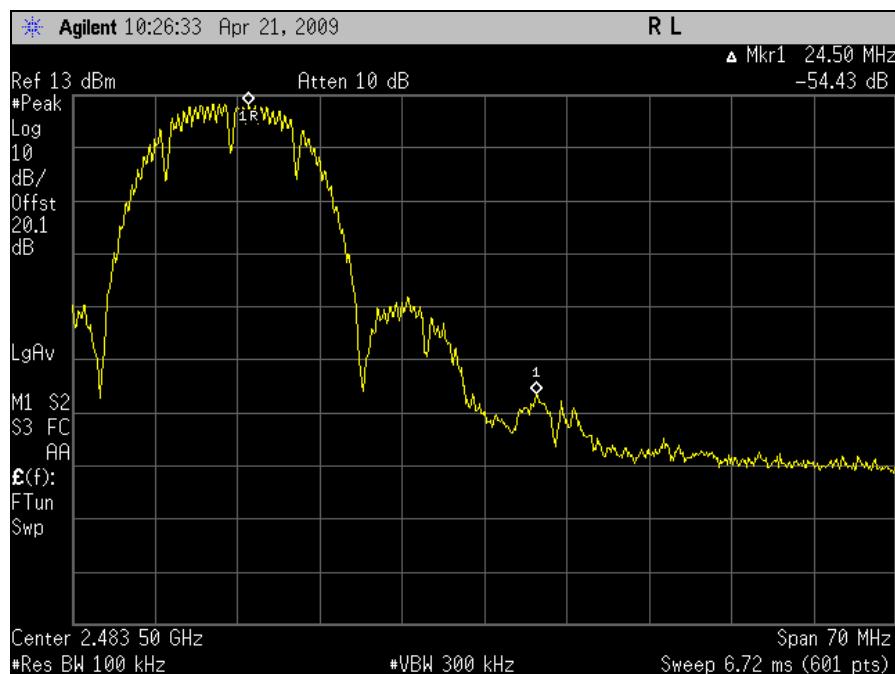


Plot 192. 802.11/b –Upper Band Edge

Conducted Band Edge – 802.11g Port 1

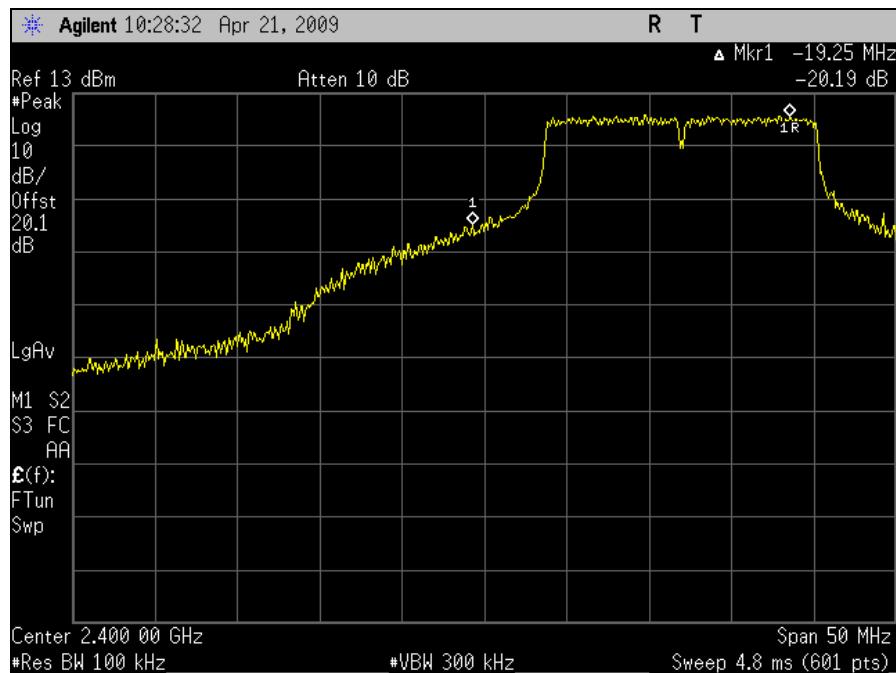


Plot 193. 802.11/g – Lower Band Edge

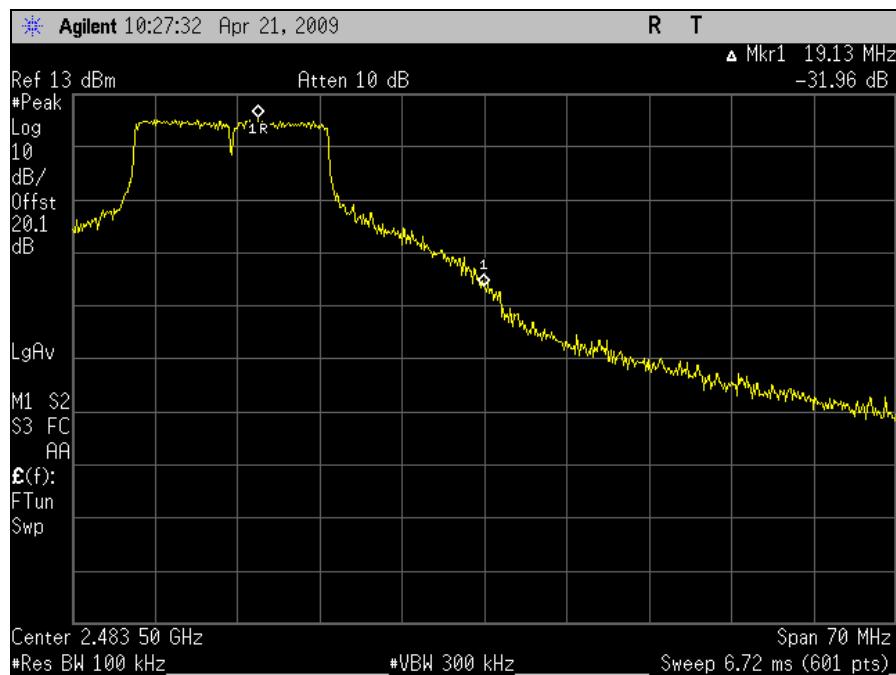


Plot 194. 802.11/g – Lower Band Edge

Conducted Band Edge – 802.11n 20MHz Port 1

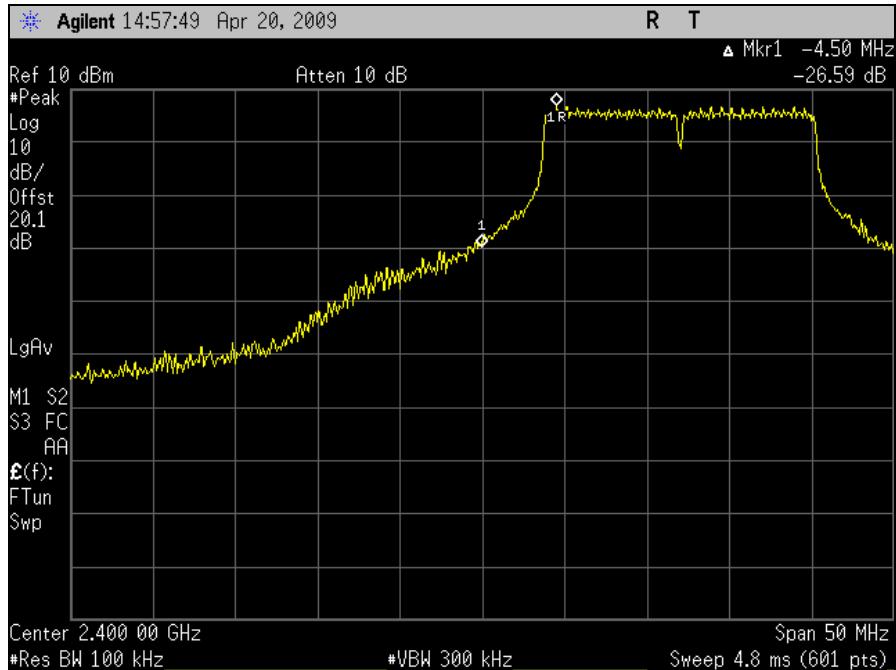


Plot 195. 802.11/n 20MHz – Lower Band Edge (Port 1)

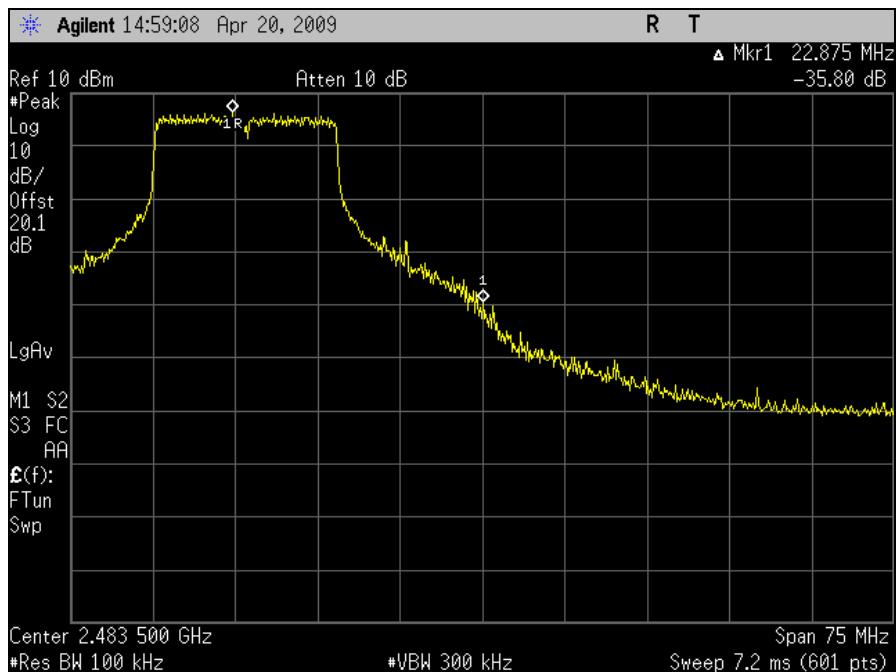

Plot 196. 802.11/n 20MHz –Upper Band Edge (Port 1)

Conducted Band Edge – 802.11n 40MHz Port 1

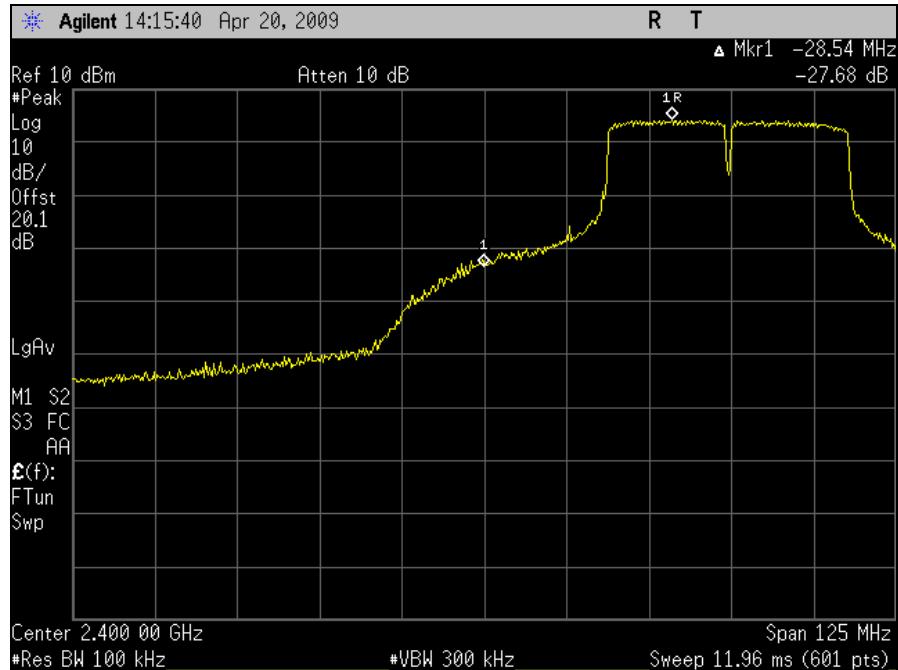


Plot 197. 802.11/n 40MHz – Mid Channel Lower Band Edge (Port 1)




Plot 198. 802.11/n 40MHz – Mid Channel Upper Band Edge (Port 1)

Conducted Band Edge – 802.11n 20MHz Port 2

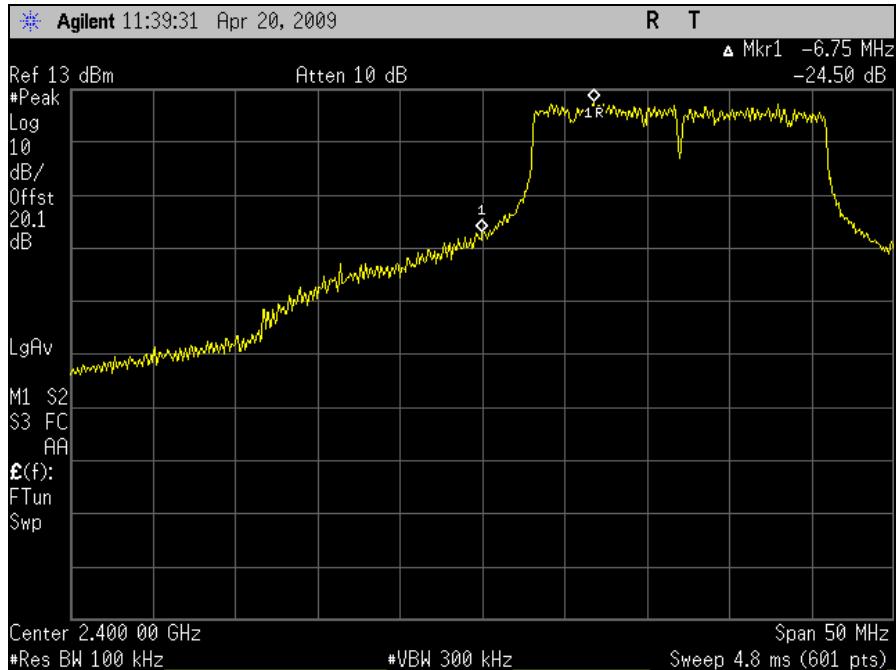


Plot 199. 802.11/n 20MHz – Lower Band Edge (Port 2)

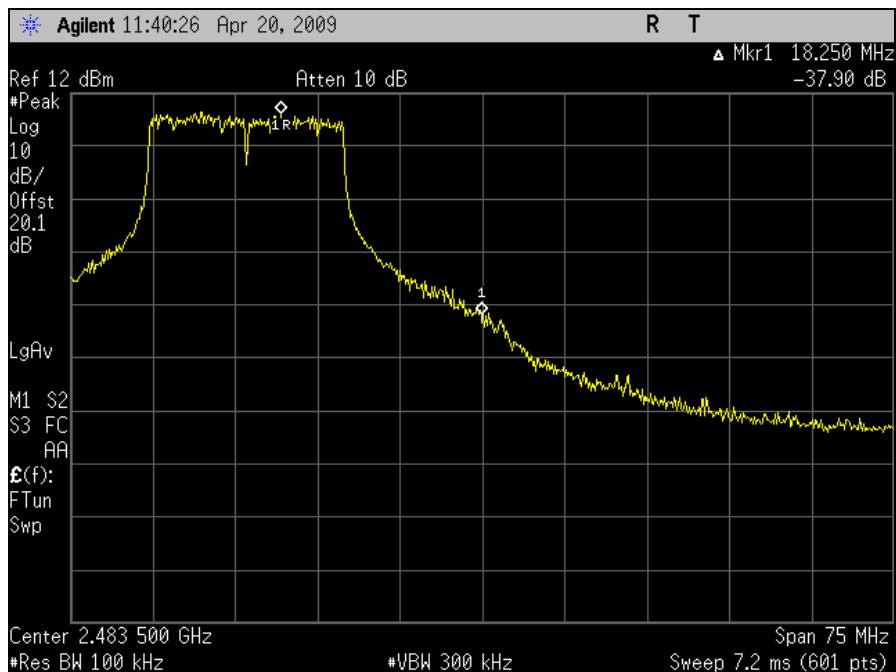


Plot 200. 802.11/n 20MHz –Upper Band Edge (Port 2)

Conducted Band Edge – 802.11n 40MHz Port 2

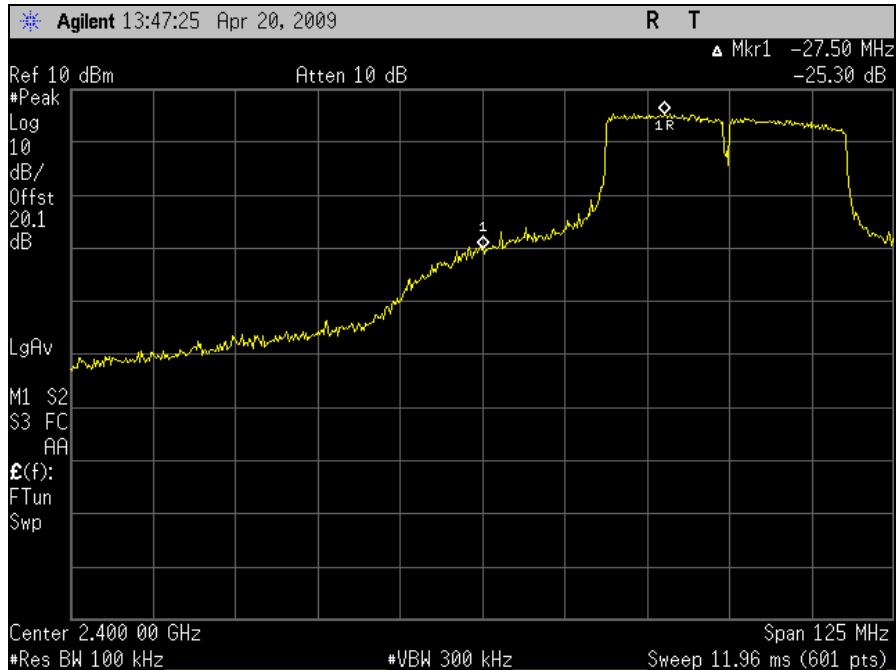

Plot 201. 802.11/n 40MHz – Lower Band Edge (Port 2)

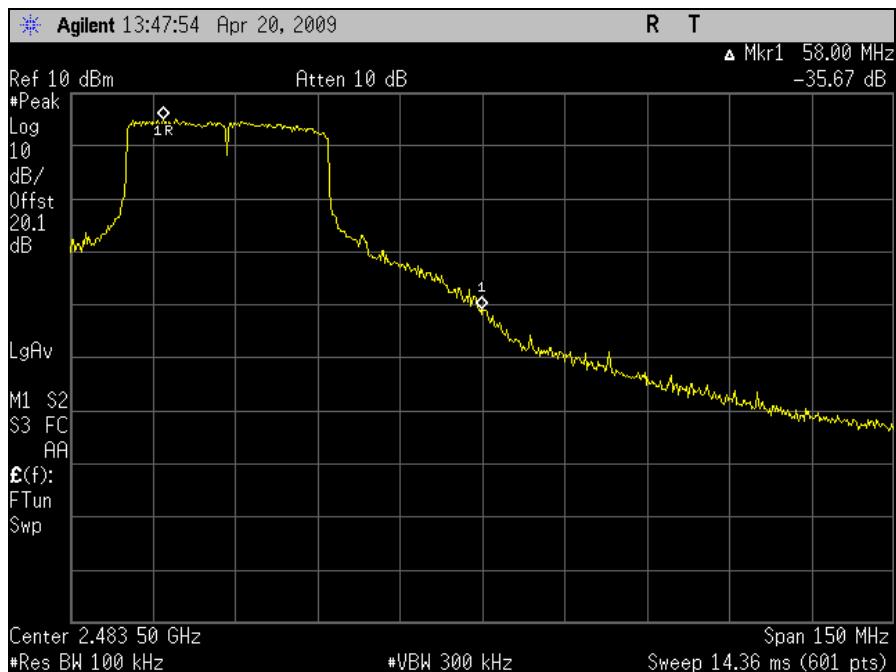

Plot 202. 802.11/n 40MHz –Upper Band Edge (Port 2)

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density


Test Requirements: §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through a directional couple. The power was monitored at the coupler port with a Peak Power Meter. The power level was set to the maximum level. The RBW was set to 3 kHz with a VRB at 3*RBW. The spectrum analyzer was set to sweep over a 100 second interval. Measurements were carried out at the low, mid and high channels.

Test Results: Equipment complies with the peak power spectral density limits of § 15.247 (e). The peak power spectral density was determined from plots on the following page(s).

Test Engineer: Anderson Soungpanya

Test Date: 04/20/09 & 04/21/09

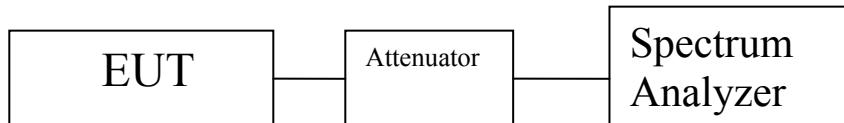

Block Diagram 4. Peak Power Spectral Density Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density (802.11b/g/n)

802.11b				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	0.22	8	7.78
Mid	2437	-0.95	8	8.95
High	2462	-1.06	8	9.06

Table 51. Peak Power Spectral Density Test Results – 802.11b Mode Port 1

802.11g				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-1.96	8	9.96
Mid	2437	-1.83	8	9.83
High	2462	-3.62	8	11.62

Table 52. Peak Power Spectral Density Test Results – 802.11g Mode Port 1

802.11n 20MHz				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.05	8	13.05
Mid	2437	-5.28	8	13.28
High	2462	-5.41	8	13.41

Table 53. Peak Power Spectral Density Test Results – 802.11n Mode Port 1 (20MHz)

802.11n 40MHz				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Mid	2437	-4.99	8	12.99

Table 54. Peak Power Spectral Density Test Results – 802.11n Mode Port 1 (40MHz)

802.11n 20MHz				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-3.37	8	11.37
Mid	2437	-4.14	8	12.14
High	2462	-5.49	8	13.49

Table 55. Peak Power Spectral Density Test Results – 802.11n Mode Port 2 (20MHz)

802.11n 40MHz				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Mid	2437	-4.76	8	12.76

Table 56. Peak Power Spectral Density Test Results – 802.11n Mode Port 2 (40MHz)


802.11n 20MHz (All Ports)				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-0.14	8	8.14
Mid	2437	-0.02	8	8.02
High	2462	0.40	8	7.6

Table 57. Peak Power Spectral Density Test Results – 802.11n Mode All Ports (20MHz)


802.11n 40MHz (All Ports)				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Mid	2437	-5.37	8	13.37

Table 58. Peak Power Spectral Density Test Results – 802.11n Mode All Ports (40MHz)

Electromagnetic Compatibility Criteria for Intentional Radiators Peak Power Spectral Density Test Results – 802.11b Mode - Port 1

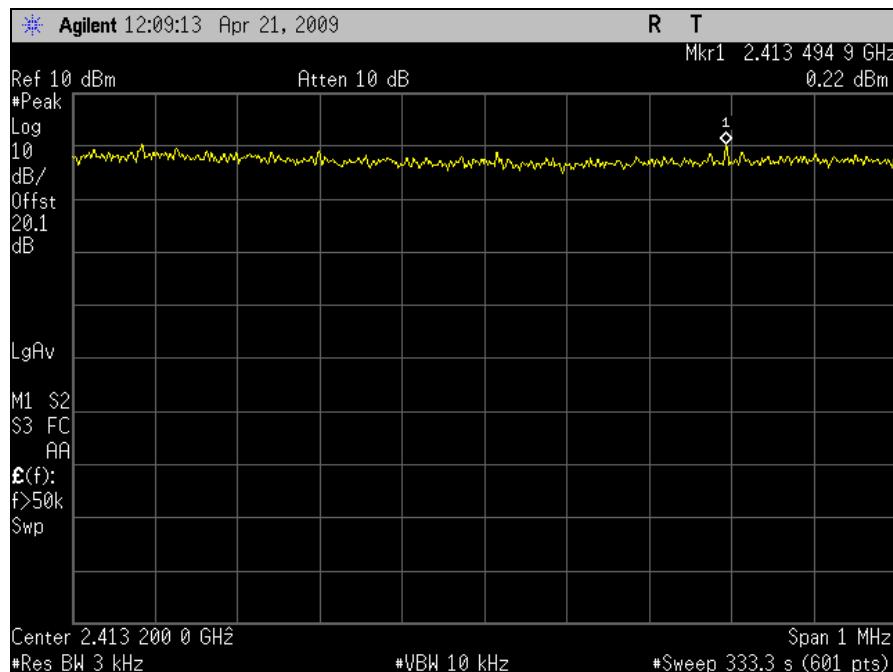


Plot 203. 802.11/b – Low Ch Peak Power Spectral Density

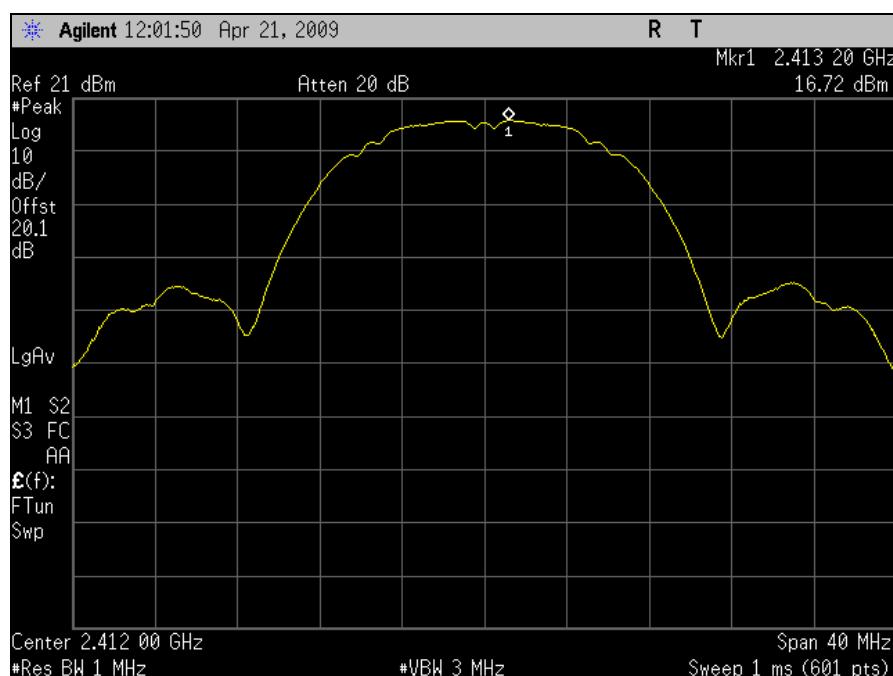


Plot 204. 802.11/b – Low Ch Peak Power Spectral Density Determination

Peak Power Spectral Density Test Results – 802.11b Mode - Port 1

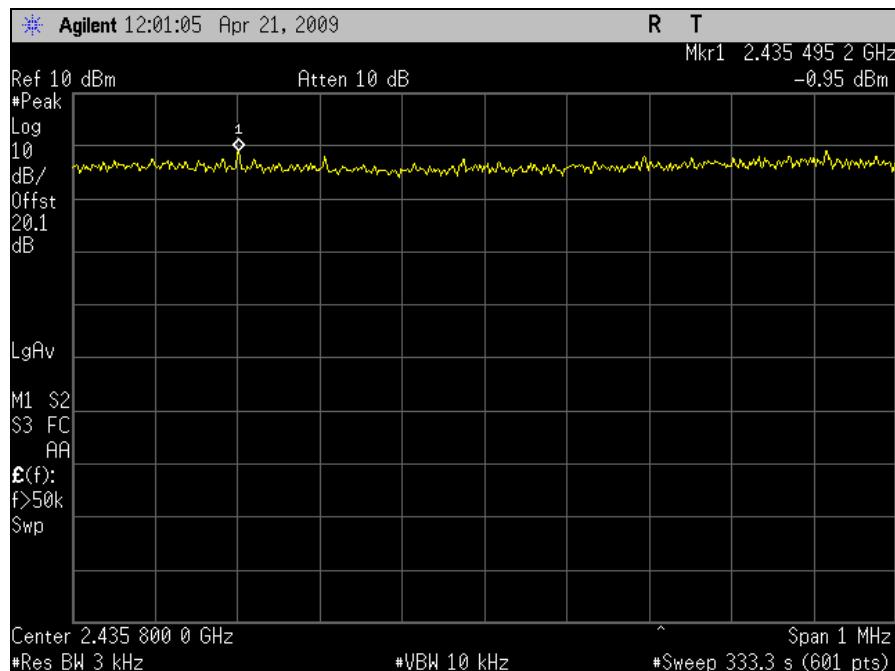


Plot 205. 802.11/b – Mid Ch Peak Power Spectral Density

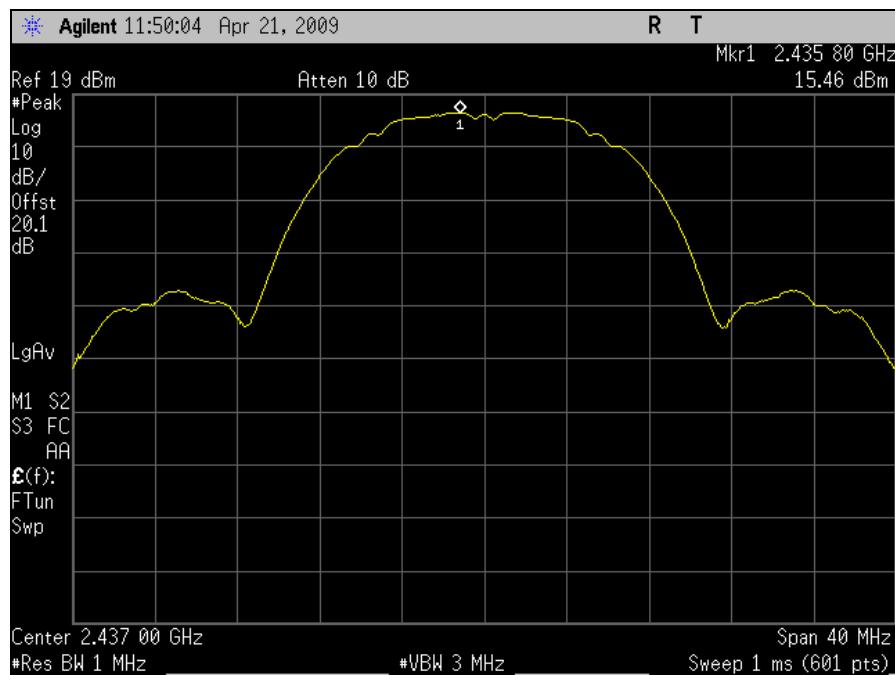


Plot 206. 802.11/b – Mid Ch Peak Power Spectral Density Determination

Peak Power Spectral Density Test Results – 802.11b Mode - Port 1

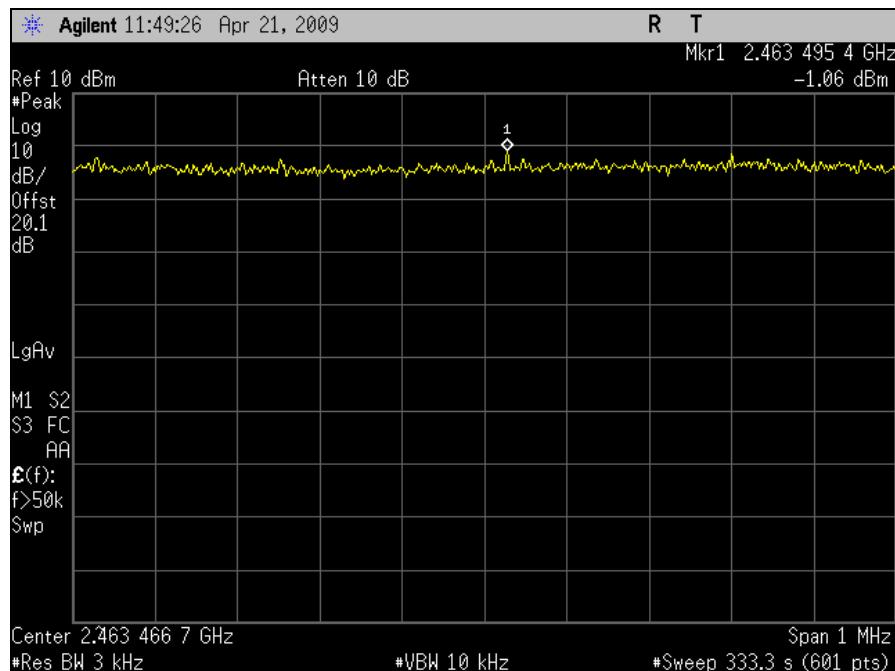


Plot 207. 802.11/b – High Ch Peak Power Spectral Density

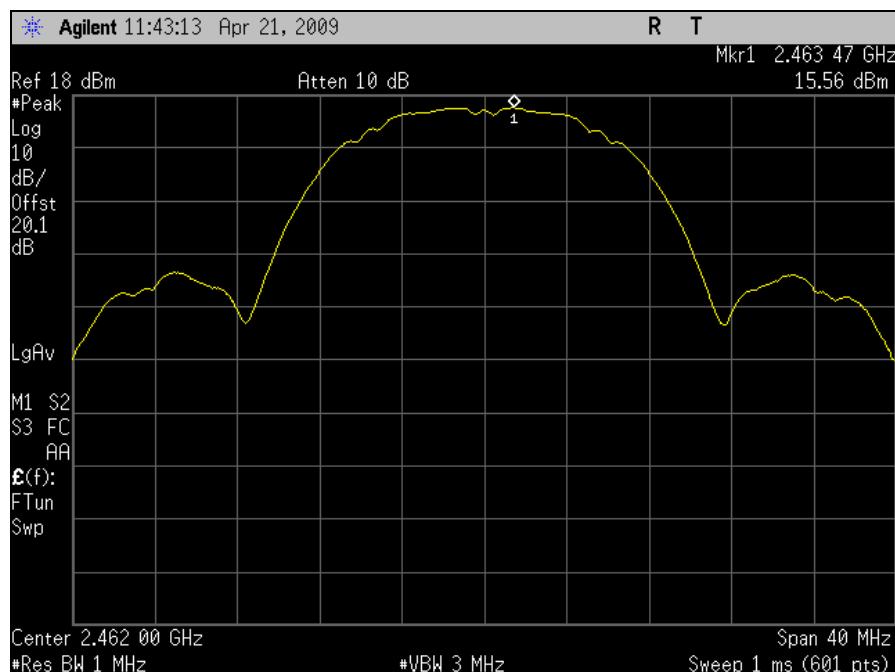

Plot 208. 802.11/b – High Ch Peak Power Spectral Density Determination

Peak Power Spectral Density Test Results – 802.11g Mode - Port 1

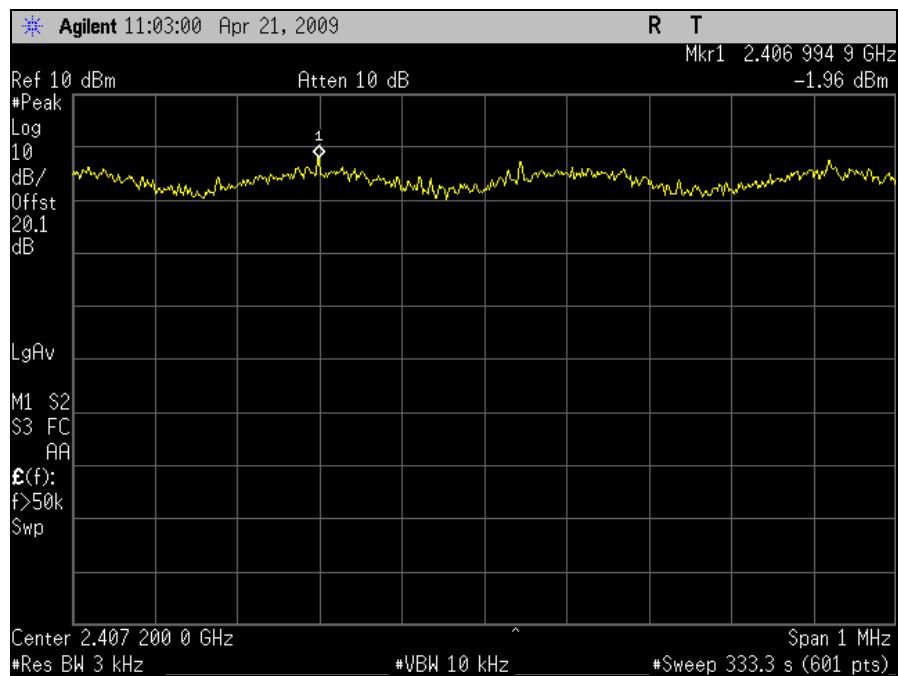


Plot 209. 802.11/g – Low Ch Peak Power Spectral Density




Plot 210. 802.11/g – Low Ch Peak Power Spectral Density Determination

Peak Power Spectral Density Test Results – 802.11g Mode - Port 1

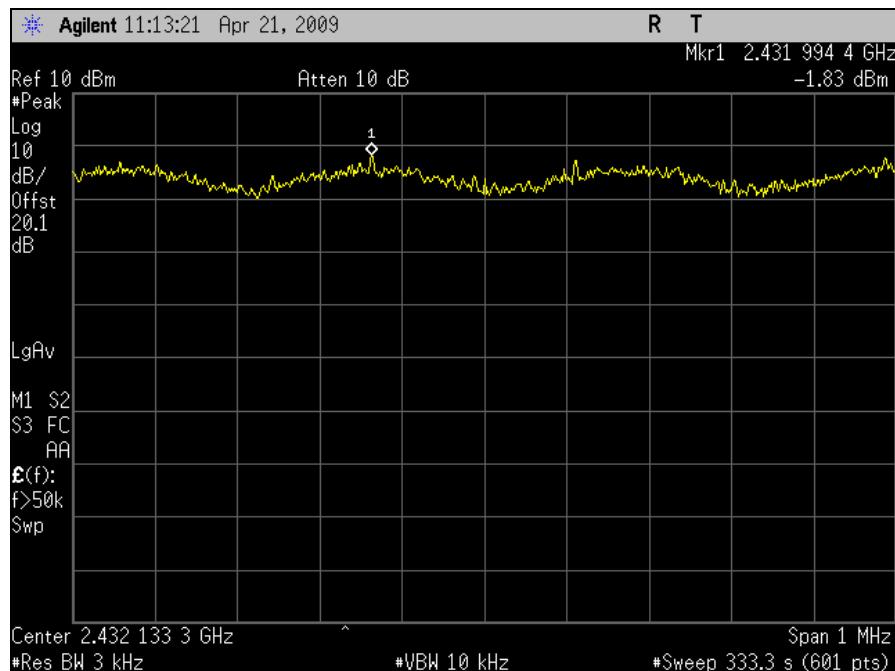


Plot 211. 802.11/g – Mid Ch Peak Power Spectral Density

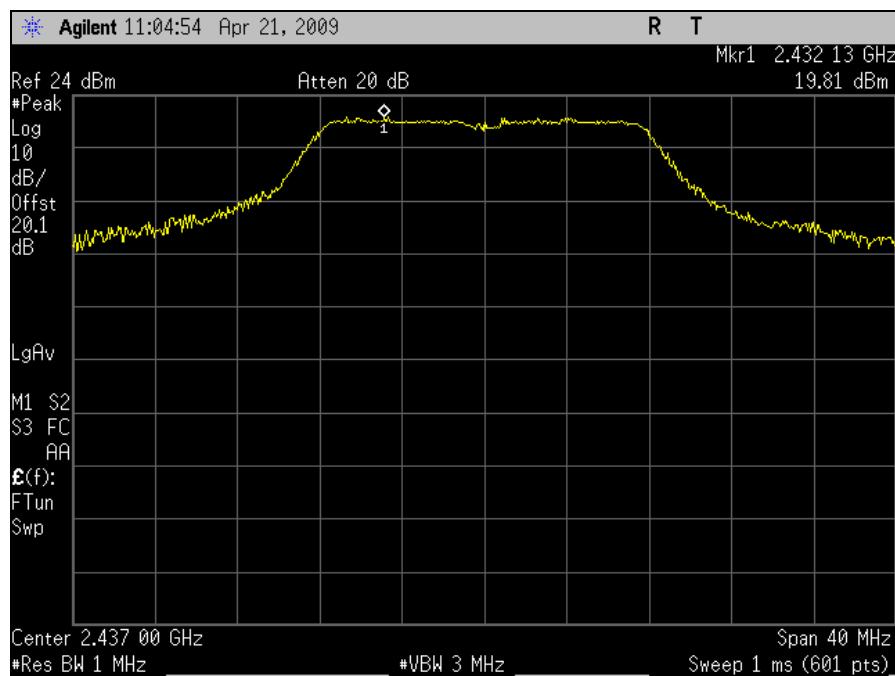


Plot 212. 802.11/g – Mid Ch Peak Power Spectral Density Determination

Peak Power Spectral Density Test Results – 802.11g Mode - Port 1

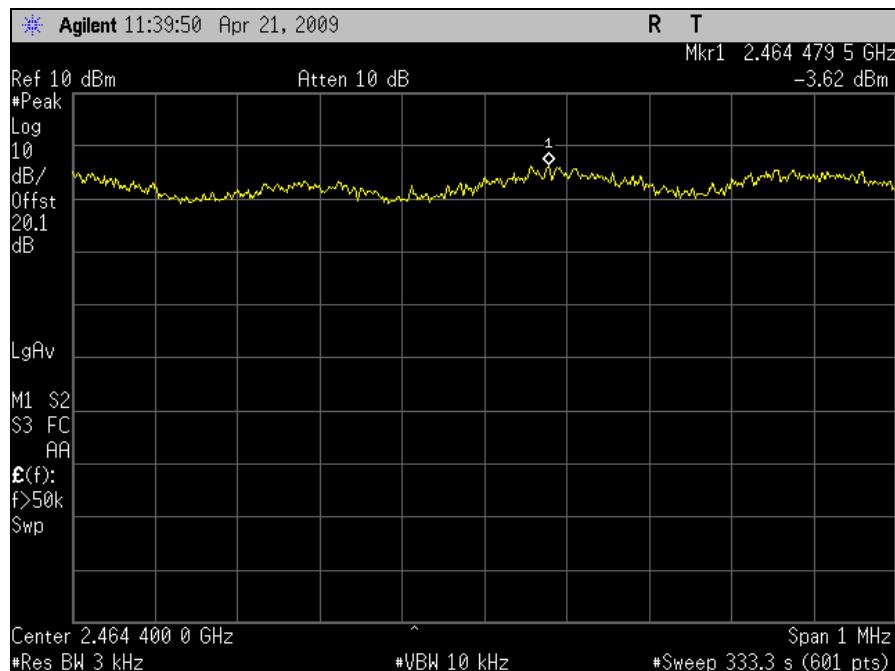


Plot 213. 802.11/g – High Ch Peak Power Spectral Density

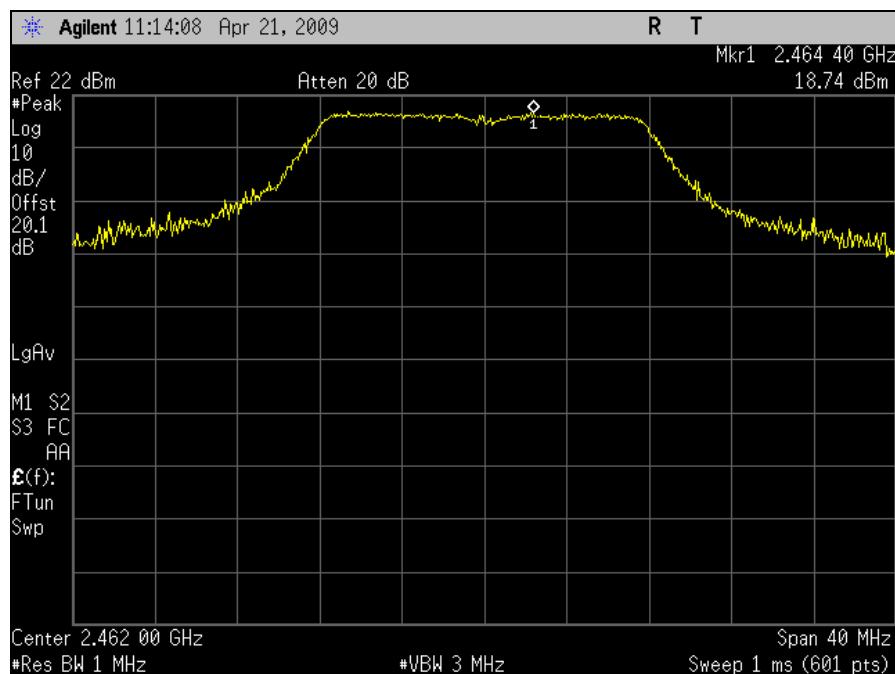


Plot 214. 802.11/g – High Ch Peak Power Spectral Density Determination

Peak Power Spectral Density Test Results – 802.11n Mode - Port 1 (20MHz)

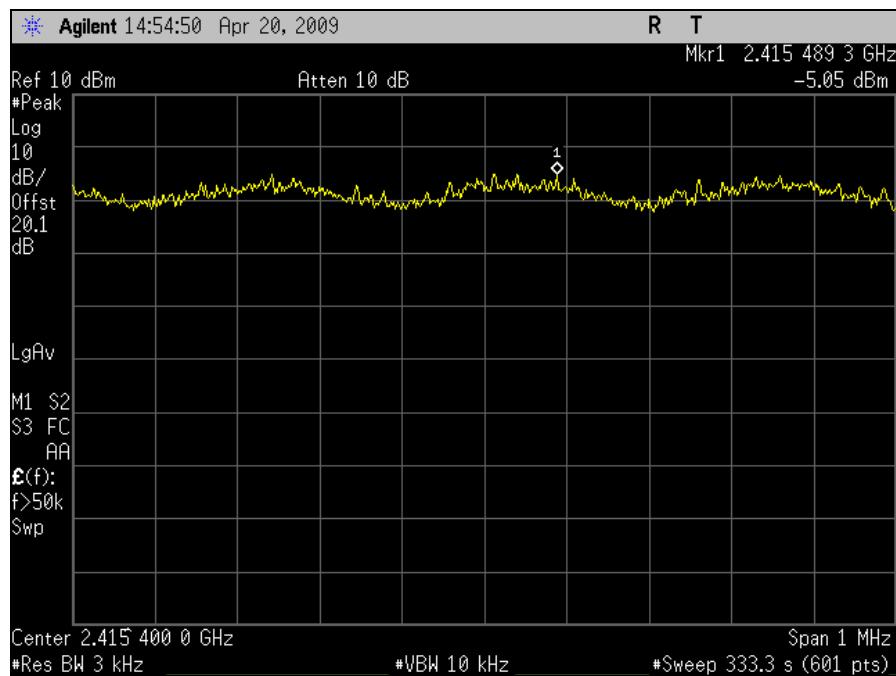


Plot 215. 802.11/n 20MHz– Low Ch Peak Power Spectral Density (Port 1)

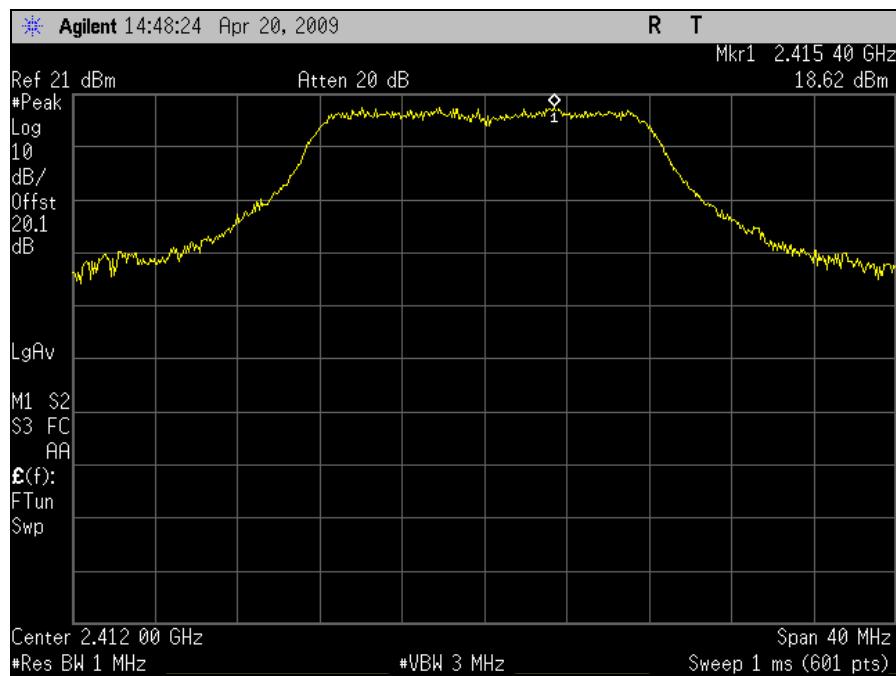


Plot 216. 802.11/n 20MHz– Low Ch Peak Power Spectral Density Determination (Port 1)

Peak Power Spectral Density Test Results – 802.11n Mode - Port 1 (20MHz)

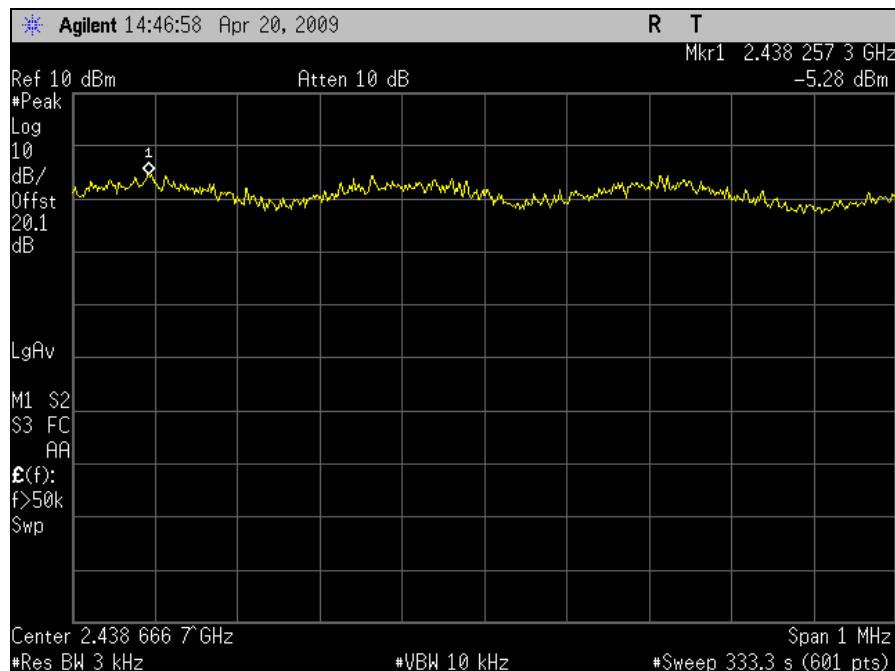


Plot 217. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density (Port 1)

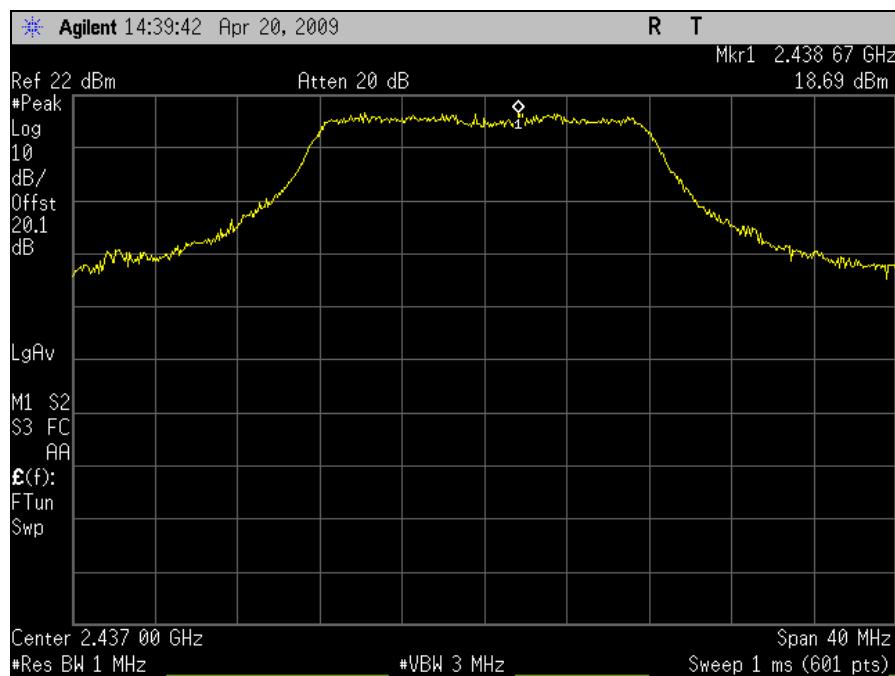


Plot 218. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density Determination (Port 1)

Peak Power Spectral Density Test Results – 802.11n Mode - Port 1 (20MHz)

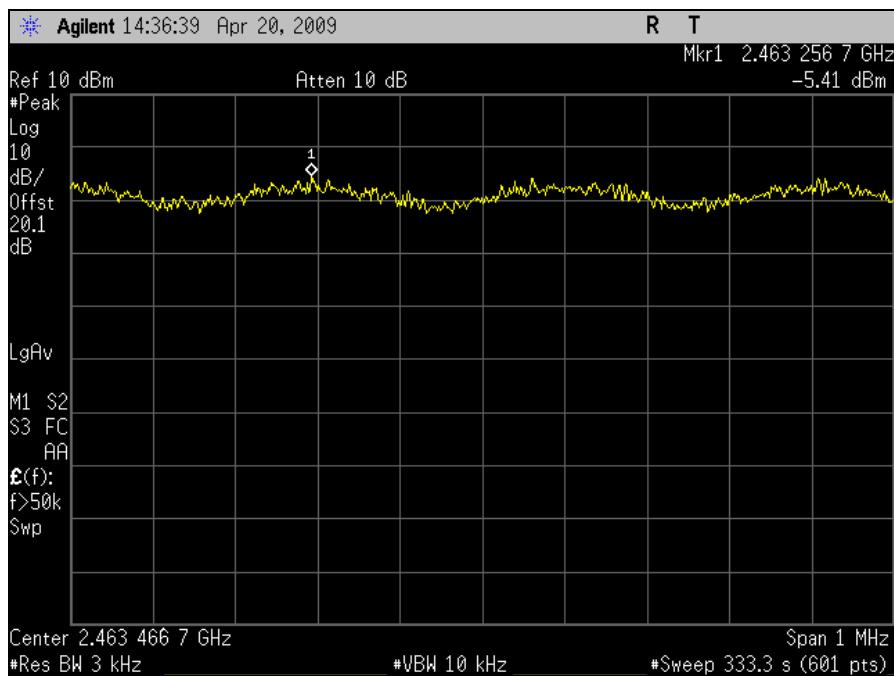


Plot 219. 802.11/n 20MHz– High Ch Peak Power Spectral Density (Port 1)

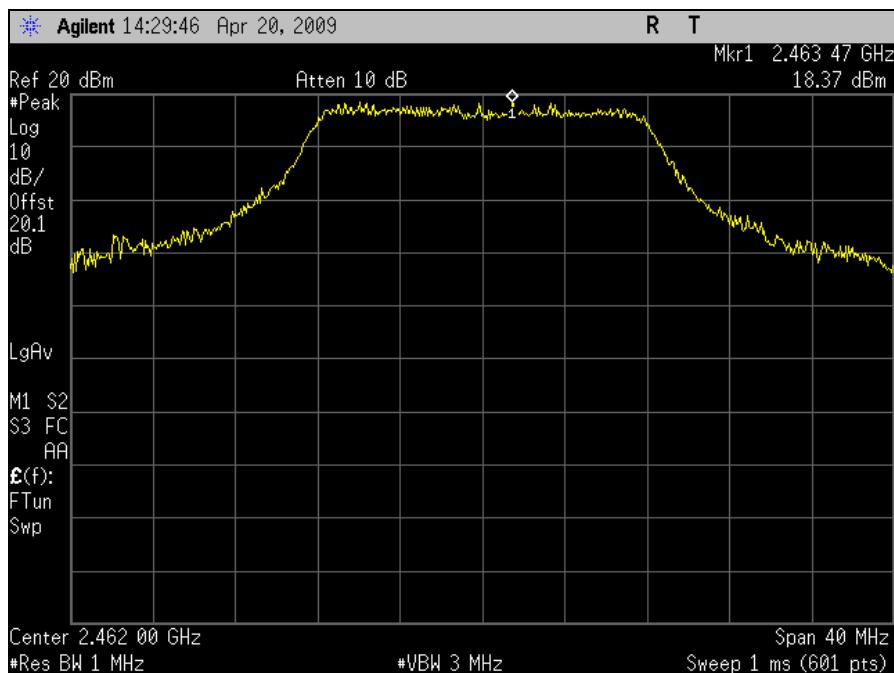


Plot 220. 802.11/n 20MHz– High Ch Peak Power Spectral Density Determination (Port 1)

Peak Power Spectral Density Test Results – 802.11n Mode - Port 1 (40MHz)

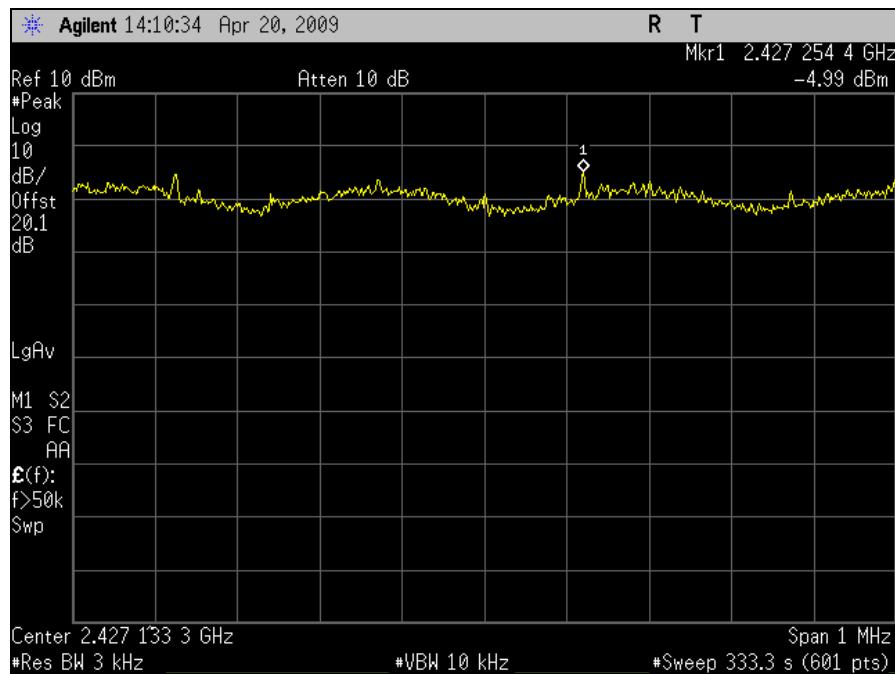


Plot 221. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density (Port 1)

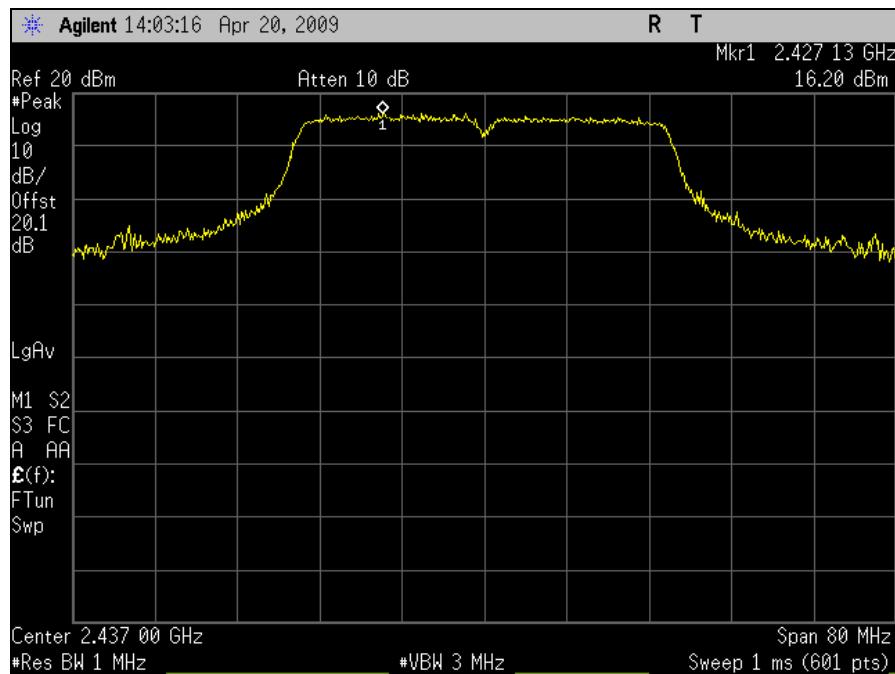


Plot 222. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density Determination (Port 1)

Peak Power Spectral Density Test Results – 802.11n Mode - Port 2 (20MHz)

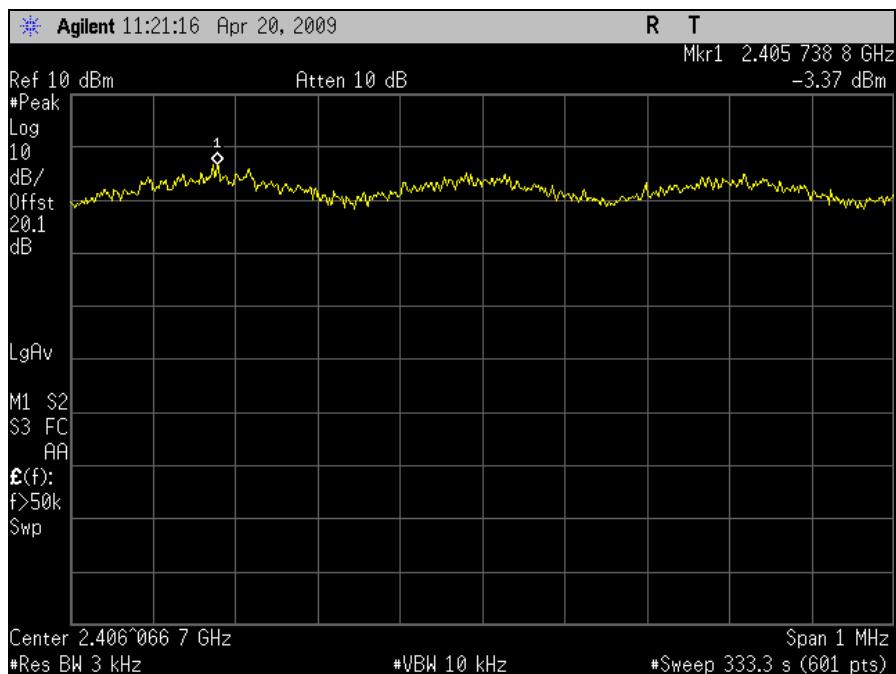


Plot 223. 802.11/n 20MHz– Low Ch Peak Power Spectral Density (Port 2)

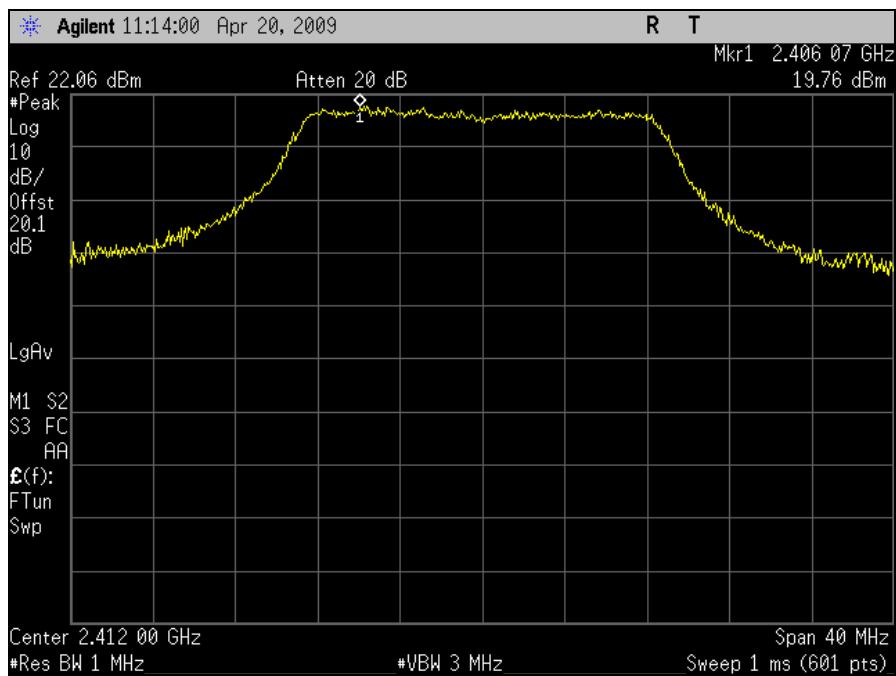


Plot 224. 802.11/n 20MHz– Low Ch Peak Power Spectral Density Determination (Port 2)

Peak Power Spectral Density Test Results – 802.11n Mode - Port 2 (20MHz)

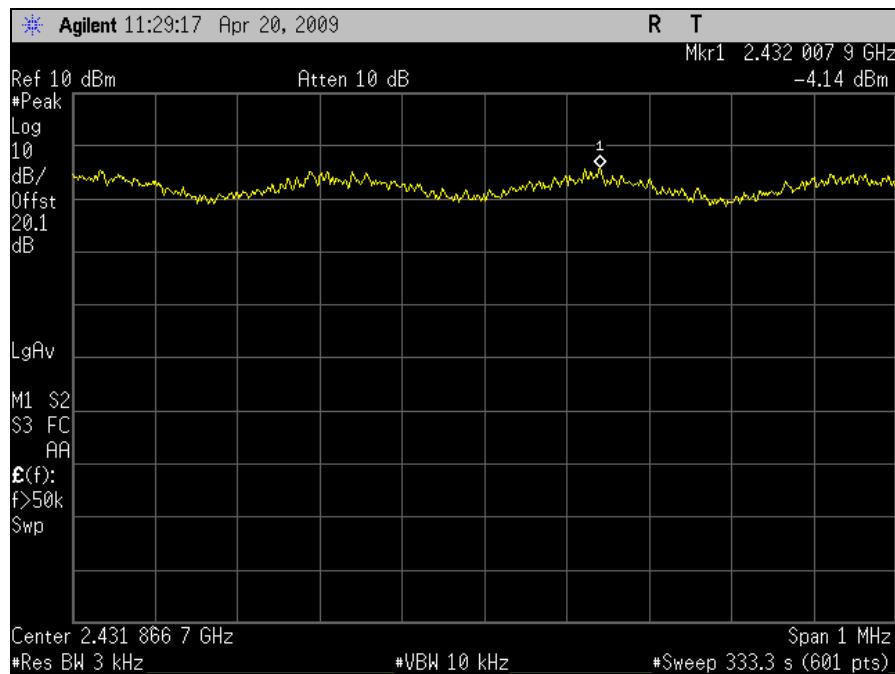


Plot 225. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density (Port 2)

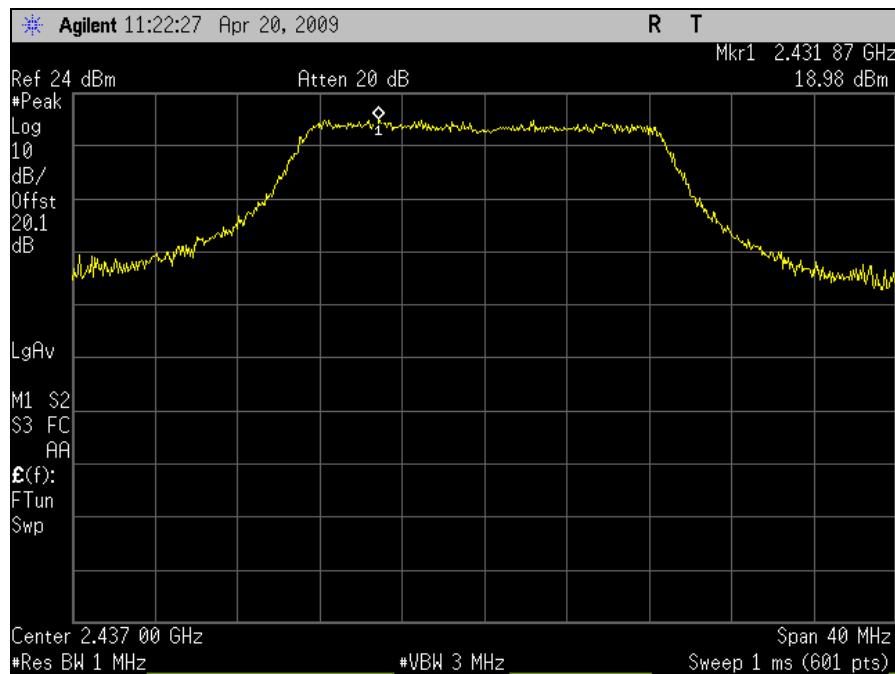


Plot 226. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density Determination (Port 2)

Peak Power Spectral Density Test Results – 802.11n Mode - Port 2 (20MHz)

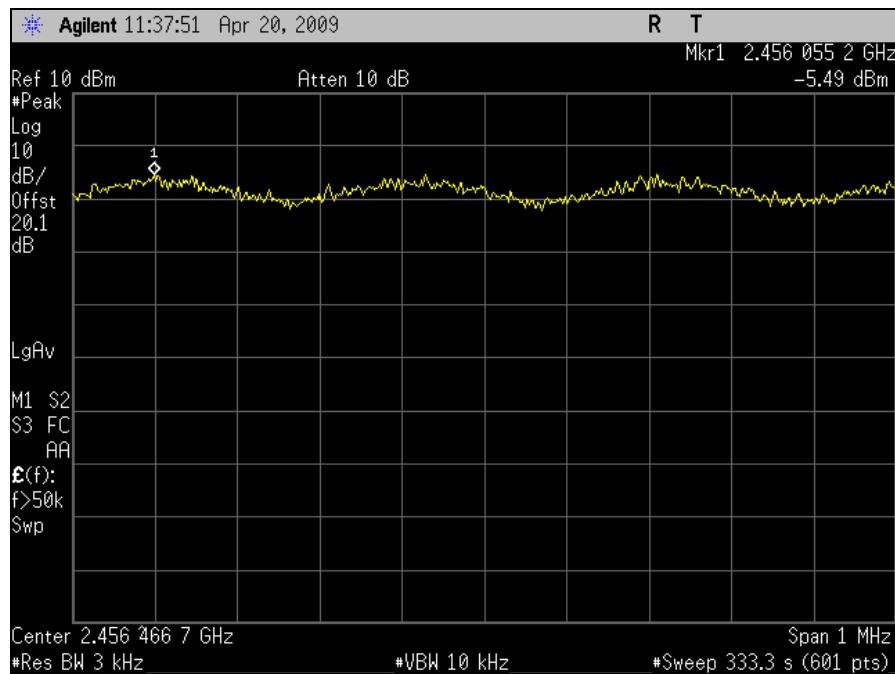


Plot 227. 802.11/n 20MHz– High Ch Peak Power Spectral Density (Port 2)

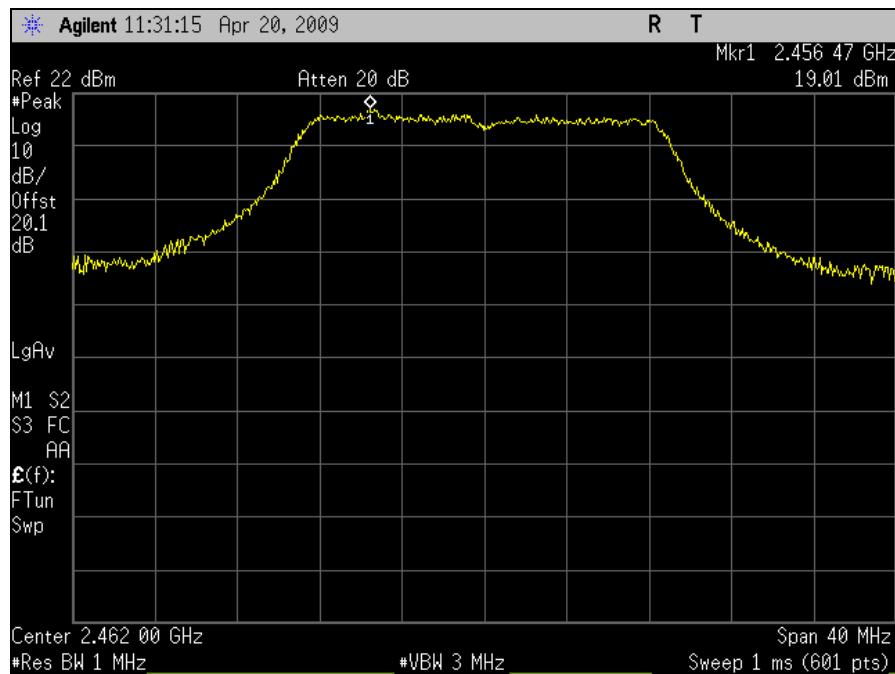


Plot 228. 802.11/n 20MHz– High Ch Peak Power Spectral Density Determination (Port 2)

Peak Power Spectral Density Test Results – 802.11n Mode - Port 2 (40MHz)

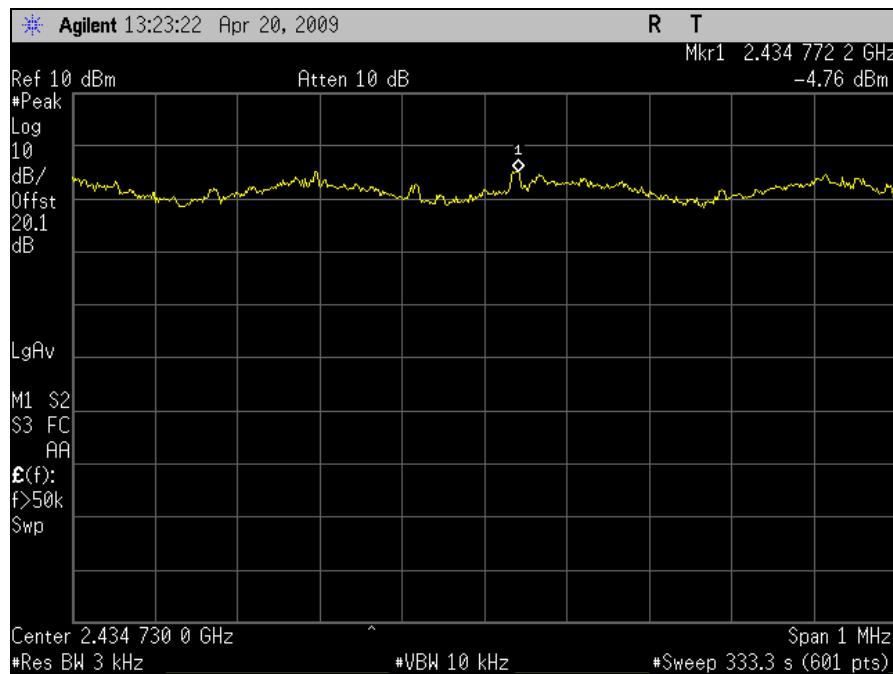


Plot 229. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density (Port 2)

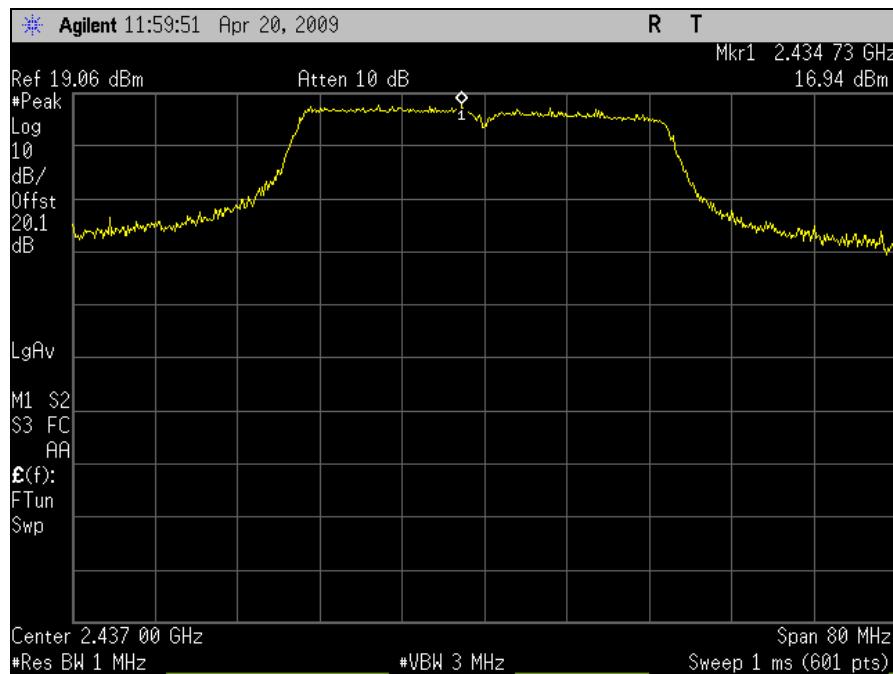


Plot 230. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density Determination (Port 2)

Peak Power Spectral Density Test Results – 802.11n Mode – All Ports (20MHz)

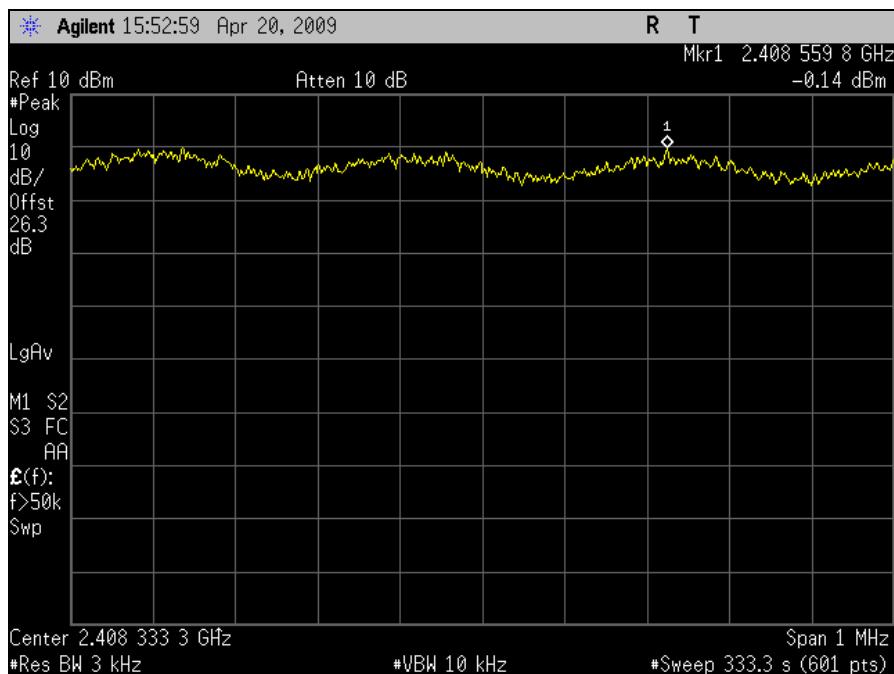


Plot 231. 802.11/n 20MHz– Low Ch Peak Power Spectral Density (All Ports)

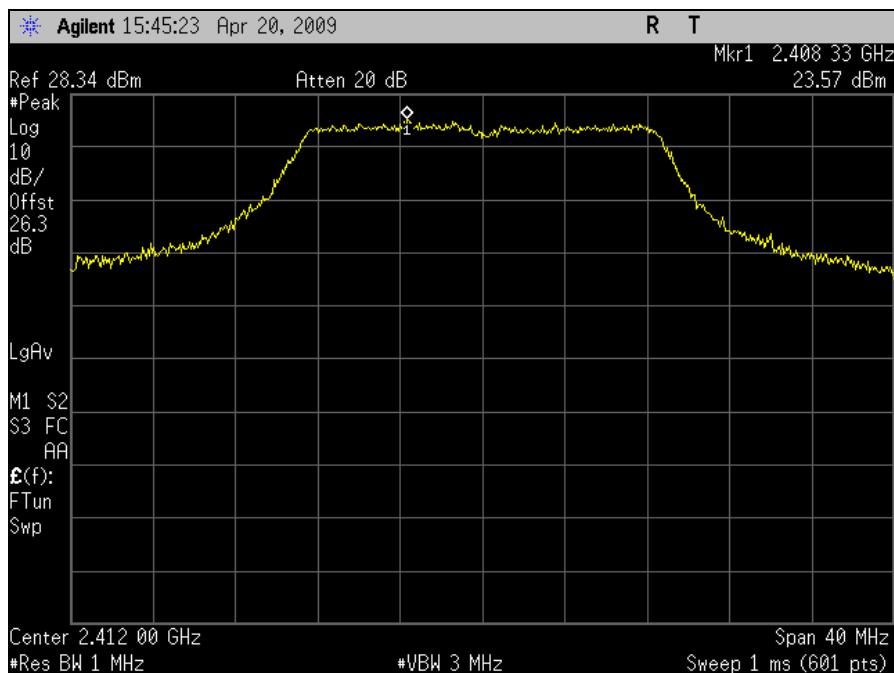


Plot 232. 802.11/n 20MHz– Low Ch Peak Power Spectral Density Determination (All Ports)

Peak Power Spectral Density Test Results – 802.11n Mode – All Ports (20MHz)

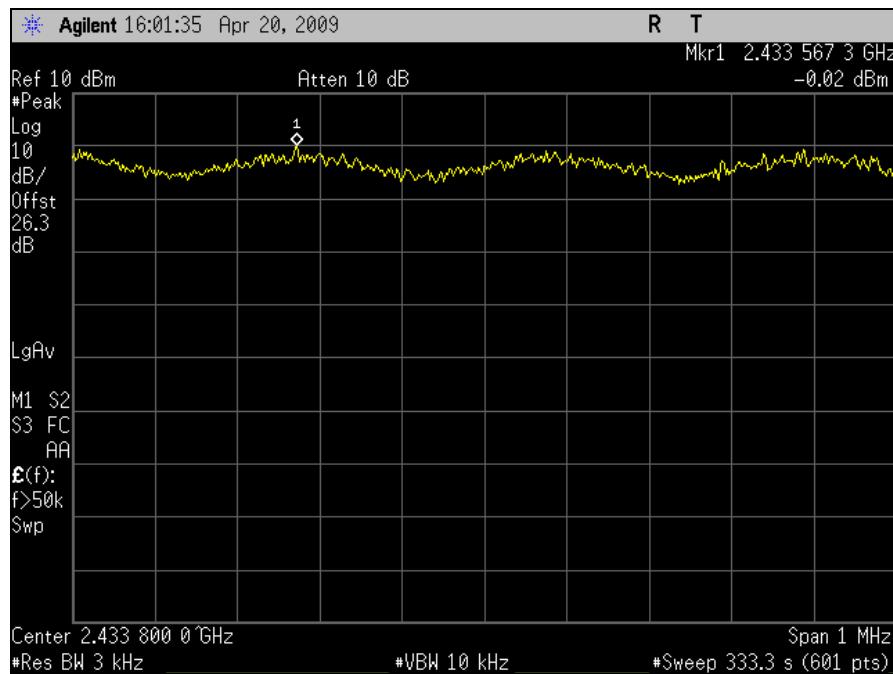

Plot 233. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density (All Ports)

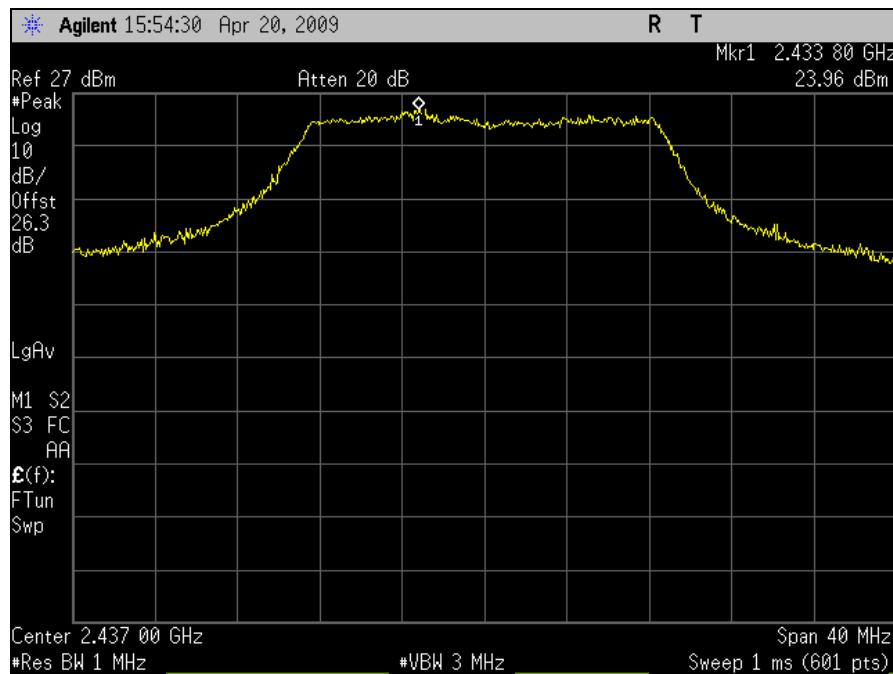


Plot 234. 802.11/n 20MHz – Mid Ch Peak Power Spectral Density Determination (All Ports)

Peak Power Spectral Density Test Results – 802.11n Mode – All Ports (20MHz)




Plot 235. 802.11/n 20MHz– High Ch Peak Power Spectral Density (All Ports)

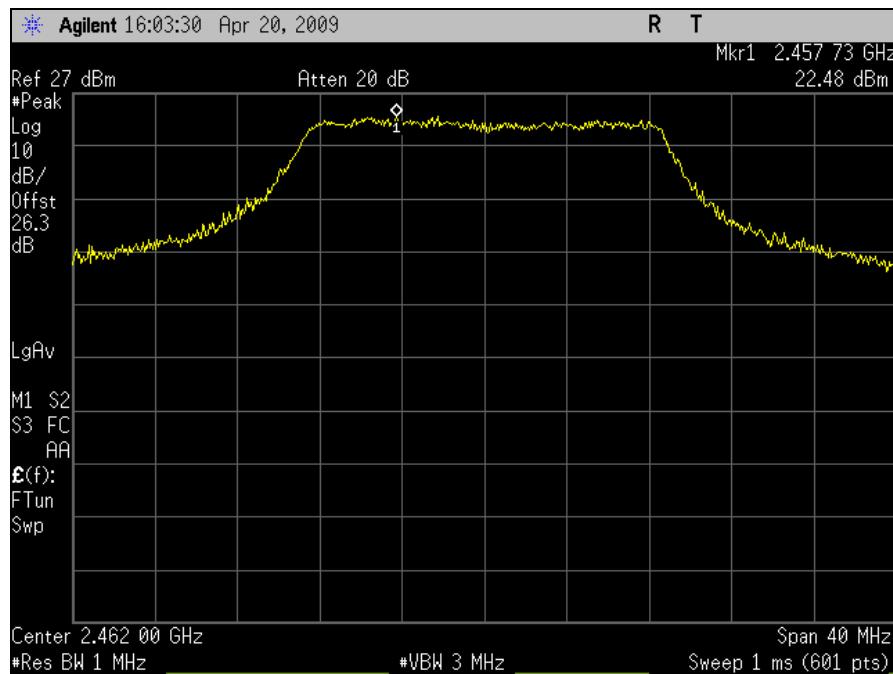


Plot 236. 802.11/n 20MHz– High Ch Peak Power Spectral Density Determination (All Ports)

Peak Power Spectral Density Test Results – 802.11n Mode – All Ports (40MHz)

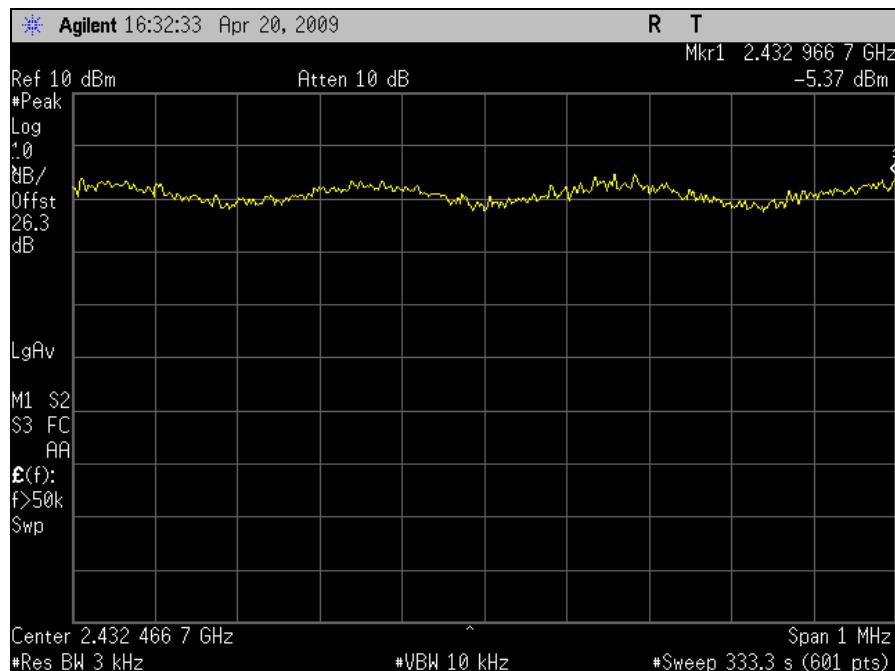

Plot 237. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density (All Ports)

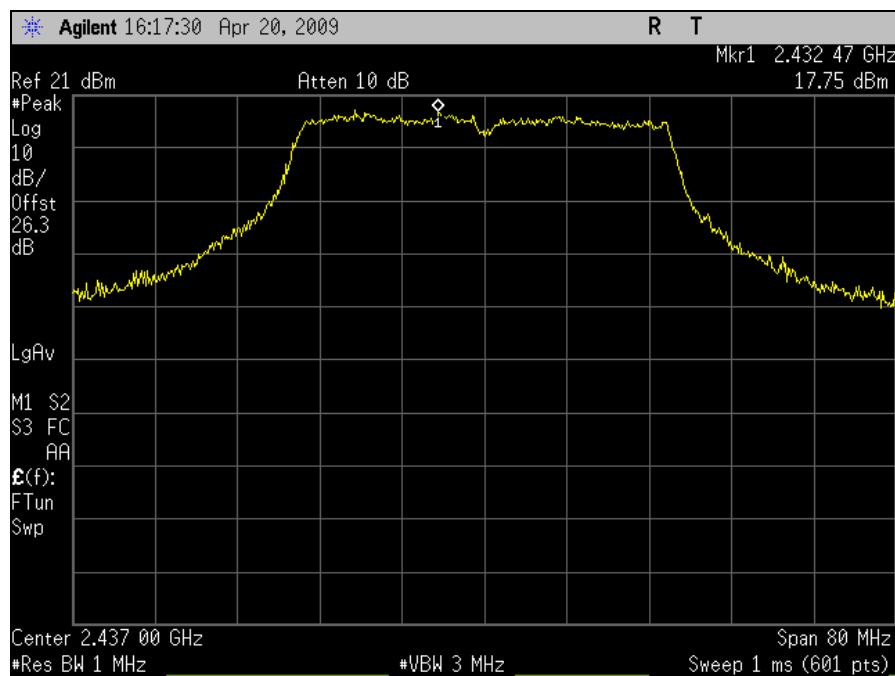

Plot 238. 802.11/n 40MHz – Mid Ch Peak Power Spectral Density Determination (All Ports)



Ubiquiti Networks
M2

Electromagnetic Compatibility
Test Equipment List
CFR Title 47, Part 15, Subpart B and C, RSS-210 & ICES-003

IV. Test Equipment



Ubiquiti Networks
M2

Electromagnetic Compatibility
Test Equipment List
CFR Title 47, Part 15, Subpart B and C, RSS-210 & ICES-003

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2457	HORN ANTENNA (1-18GHZ)	COM-POWER	AHA-118	4/17/09	4/17/10
1S2495	MULTI DEVICE CONTROLLER	ETS EMCO	2090	N/A	N/A
1S2506	FSP SPECTRUM ANALYZER	RHODE & SCHWARZ	1164.4391.30	4/30/08	4/30/09
1S2109	EMI RECEIVER RF SECTION	HEWLETT PACKARD	85462A	11/6/08	11/6/09
1S2108	RF FILTER SECTION	HEWLETT PACKARD	85460A	11/6/08	11/6/09
1S2438	TRANSIENT LIMITER	AGILENT	11947A	SEE NOTE	
1S2372	AC LISN (120VAC 60HZ)	FCC	50A-AC	2/2/09	2/2/10
1S2406	SPECTRUM ANALYZER	AGILENT	E4407	4/14/09	4/14/10
1S2198	HORN ANTENNA	EMCO	3115	9/10/09	9/10/10
1S2121	PREAMP	HEWLETT PACKARD	8449B	10/26/08	10/26/09
1S2509	EMI TEST RECEIVER	RHODE & SCHWARZ	ESU40	4/27/2009	4/27/2010
1S2583	SPECTRUM ANALYZER	AGILENT	E4447A	1/12/09	1/12/10
1S2485	BILOG ANTENNA	TESEQ	CBL-6112D	1/26/09	1/26/10
1S2520	THERMO-HYGROMETER	FISHER SCIENTIFIC	11-661-7D	11/14/2007	11/13/2009
1S2482	5M CHAMBER	PANASHEILD	641431	11/18/08	11/18/09
1S2484	BILOG ANTENNA	TESEQ	CBL 6112D	1/21/2008	7/21/2009
1S2481	10M CHAMBER	ETS-LINDGREN	DKE 8X8 DBL	12/26/2008	12/26/2009
1S2421	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	11/6/08	5/15/09
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2034	COUPLER, DIRECTIONAL 1-20 GHZ	KRYTAR	101020020	SEE NOTE	

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Ubiquiti Networks
M2

Electromagnetic Compatibility
Certification & User Manual Information
CFR Title 47, Part 15, Subpart B and C, RSS-210 & ICES-003

V. Certification & User's Manual Information



Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Ubiquiti Networks
M2

Electromagnetic Compatibility
Certification & User Manual Information
CFR Title 47, Part 15, Subpart B and C, RSS-210 & ICES-003

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
- (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
- (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
- (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

- Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.
- Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class [²] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [¹] est conforme à la norme NMB-003 du Canada.

² Insert either A or B but not both as appropriate for the equipment requirements.



Ubiquiti Networks
M2

Electromagnetic Compatibility
End of Report
CFR Title 47, Part 15, Subpart B and C, RSS-210 & ICES-003

End of Report